

Socket Finish


BL - Matte Black


WH - White


PC - Polished Chrome

Standard Finishes


BZ - Bronze


SG - Satin Gold


SS - Satin Silver

Special Order Powder Coat Finishes

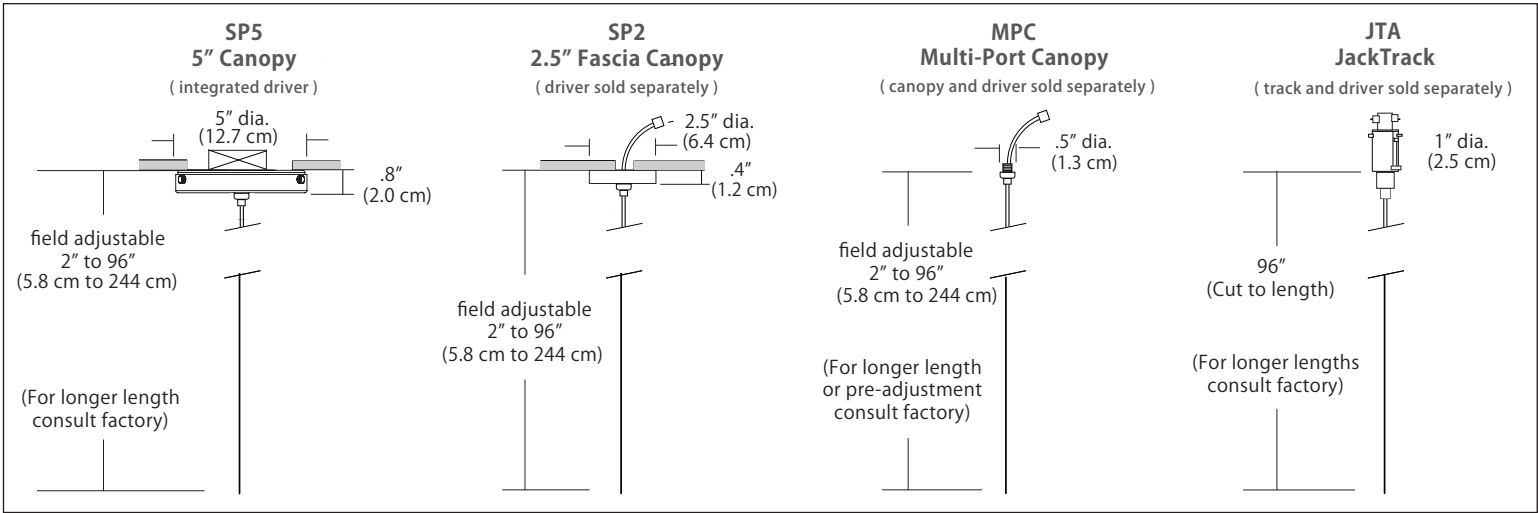
Default Cable Finish Matches	
SOCKET	CABLE
Black	Black
White	Clear Silver
Bronze	Black
Satin Gold	Black
Satin Silver	Clear Silver

Wattage (Lumens measured at 3000K)

- 2W** = 2 Watts / 86 Lumens, **recommended for Multi-Port applications** (Multi-Port system and JackTrack adapter).
- 3W** = 3 Watts / 133 Lumens, **recommended for single pendant applications** (5" Canopy and 2.5" Fascia Canopy).

Mounting























- SP5** = 5" round canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box
Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)
- SP2** = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)
Cable with modular connector (and optional wire harness) attaches to a remote driver
- MPC** = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately)
Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)
MPC options include:
Solo Systems, Duo Systems, Quatro Systems, and JackTrack Systems
MPC, MPR, MS, MQ, MD canopies
- JTA** = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately)
Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter




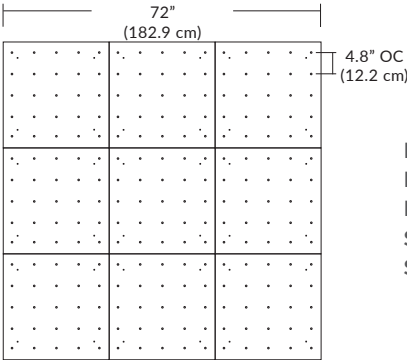

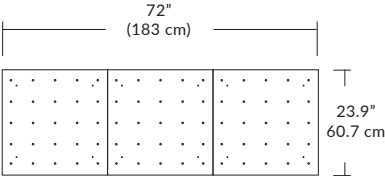

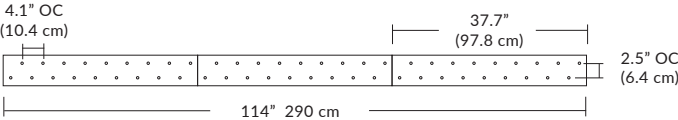



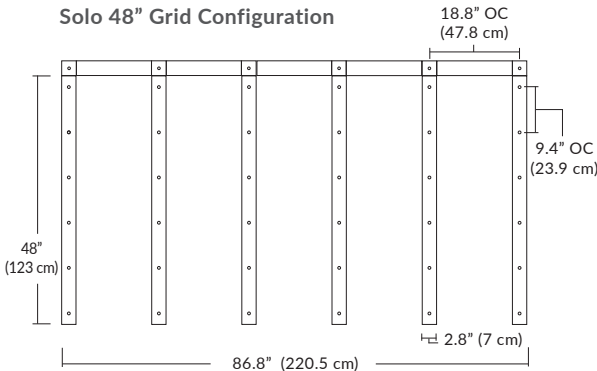
Cable Length

- 096** = 96" (Default Length).
- XXX** = Custom Length (300" = maximum length)
- For Custom Lengths, please indicate length in inches.

For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjack.com.

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. (12.7 cm)	 .8" (2 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. (6.4 cm)	 .4" (1.3 cm) (Remote Driver required)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPS MQ	24" Multi-Port Square - 9 Port C-MPS-2409-# MQ-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-# MQ-2425-#	 8" OC (20.3 cm) 23.9" (60.7 cm) 9 Port  4.8" OC (12.2 cm) 23.9" (60.7 cm) 25 Port	 21.5" (54.6 cm) 2.5" (6 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPT MD	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# MD-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-# MD-3818-#	 7.5" OC (19 cm) 3" OC (7.6 cm) 37.7" (97.8 cm) 10 Port  4.1" OC (10.4 cm) 2.5" OC (6.4 cm) 37.7" (97.8 cm) 18 Port	 4.7" (11.9 cm) 2.5" (6 cm) 6" (15.2 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPL	22" Multi-Port Linear - 5 Port C-MPL-2205-# MS-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-# MS-4811-#	 4.4" OC (11.2 cm) 2.8" (7 cm) 21.8" (56 cm) 5 Port  4.4" OC (11.2 cm) 2.8" (7 cm) 48" (123 cm) 11 Port	 2.8" (7 cm) 1.4" (4 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPR	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 11" dia. (27.9 cm) 7.4" OC (18.8 cm) 3 Port  11" dia. (27.9 cm) 2.9" OC (7.4 cm) 9 Port	 10" dia. (25.4 cm) 2.1" (5.3 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPR	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 20" dia. (50.8 cm) 14.5" OC (36.8 cm) 3 Port  20" dia. (50.8 cm) 6.4" OC (16.3 cm) 12 Port	 18" dia. (45.7 cm) 2.5" (6 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack 48" JackTrack 94" JackTrack	 1.75" (4.5 cm) 23" (58.4 cm)  1.75" (4.5 cm) 47" (119.4 cm)  1.75" (4.5 cm) 94" (238.8 cm)	 1.38" (3.5 cm) 1.75" (4.5 cm) (Integrated or Remote Driver)	BL Matte Black WH White

For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjack.com.

System	Pendant Mounting	Configuration Examples		Finish Options
Quatro 4S (4' 2x2 / 9 Port) MQ-2409-XX-4S-X-XXX		Square Configurations 	6S (6' 3x3 / 25 Port) MQ-2425-XX-6S-X-XXX	BL Matte Black PC Pol. Chrome BZ Bronze SG Satin Gold SS Satin Silver
				
		Linear Configurations 	6L (6' x2' / 25 Port) MQ-2425-XX-6L-X-XXX	
				
Duo 6L (6'4"x6" / 10 Port) MD-3810-XX-6L-X-XXX		Linear Configurations 		BL Matte Black PC Pol. Chrome BZ Bronze SG Satin Gold SS Satin Silver
				
Solo		Solo 48" Linear Configuration 	Solo (L) Configuration 	BL Matte Black PC Pol. Chrome BZ Bronze SG Satin Gold SS Satin Silver
		Solo 22" Grid Configuration 	Solo 48" Grid Configuration 	

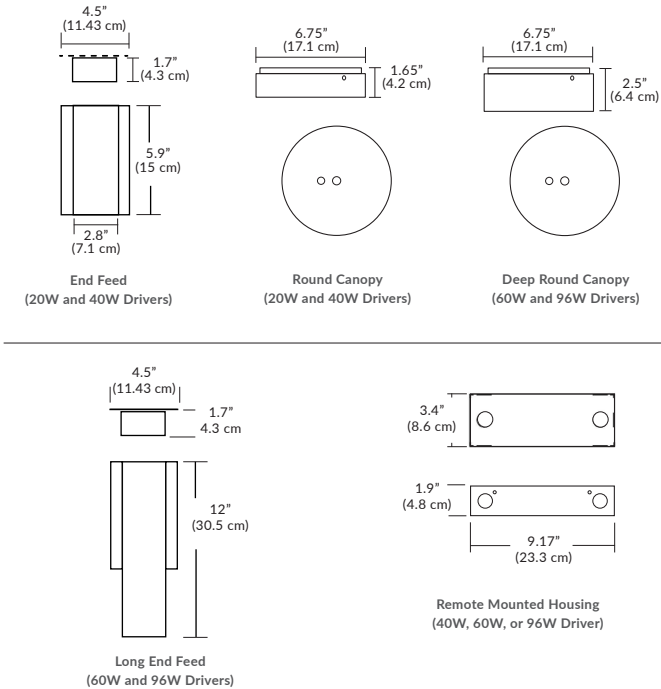
For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjacklighting.com.

Universal Drivers



Universal dimmable (TRIAC, ELV or 0-10V), Flicker-free dimming 100% to 2% (with optimal configuration), auto reset, short circuit, overload and thermal protection.
NOTE: Total pendant wattage needs to be 10% less than driver wattage.

SKU	Watts	Output Volts	Input Volts	Mounting	Dimming
PS-94ST-20W-27U-IN	20W	24V	120V - 277V	Integral in End Feed	(27U)
PS-94ST-20W-27U-IC	20W	24V	120V - 277V	Inside Round Canopy	(27U)
PS-94ST-40W-27U-IN	40W	24V	100V - 305V	Integral in End Feed	(27U)
PS-94ST-40W-27U-IC	40W	24V	120V - 277V	Inside Round Canopy	(27U)
PS-94ST-60W-27U-IN	60W	24V	120V - 277V	Integral in End Feed	(27U)
PS-94ST-60W-27U-IC	60W	24V	120V - 277V	Inside Round Canopy	(27U)
PS-94ST-96W-27U-IN	96W	24V	120V - 277V	Integral in End Feed	(27U)
PS-94ST-96W-27U-IC	96W	24V	120V - 277V	Inside Round Canopy	(27U)
PS-94ST-40W-27U-RE	40W	24V	100V - 305V	Remote	(27U)
PS-94ST-60W-27U-RE	60W	24V	120V - 277V	Remote	(27U)
PS-94ST-96W-27U-RE	96W	24V	120V - 277V	Remote	(27U)



DRIVER ORDERING GUIDE

Type	Series	Watts	Dimming	Mounting
PS	94ST		27U	
PS Power Supply	94ST Universal (Standard)	20W - 20 Watts 40W - 40 Watts 60W - 60 Watts 96W - 96 Watts	27U 120-277V / Universal Dimming (TRIAC / ELV / 0-10V)	IN Integral RE Remote IC Inside Canopy

Example: PS-94ST-96W-27U-RE