
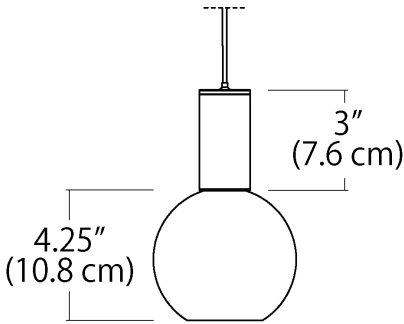


ACRYLIC GLOBE 5" CLEAR SMALL PENDANT



SPECIFICATIONS

Finish	Matte Black, White, or Polished Chrome
Diffuser Options	Bubbles, Clear Dimpled, or Frosted
LED Color Temperature	3000K (standard) 2700K, 3500K, or 4000K also available
Wattage	5 Watts / 368 Lumens
Driver Location	Integral in canopy, remote, or above canopy (depending on canopy selected)
Dimming	Universal (TRIAC, ELV, 0-10V)
Color Rendering Index	90CRI
Cable Length	8' (for longer lengths, consult factory)



ORDERING GUIDE

← PRODUCT CODE							OPTIONS →	
CATEGORY	SERIES	DIFFUSER	SIZE	SOCKET COLOR	CCT	WATTAGE	MOUNTING	CABLE LENGTH
SP	GLL	CL	05			5W		
SP Small Pendant	GLL Acrylic Globe Small Pendant	CL Clear	05 5" Diameter	Standard BL - Matte Black WH - White PC - Polished Chrome Special Order BZ - Bronze SG - Satin Gold SS - Satin Silver	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K (30K Standard)	5W 5 Watts / 368 Lm	SP2 - 2.5" Canopy SP5 - 5" Canopy MPC - Multi-Port Canopy JTA - JackTrack	Indicate Cable Length in Inches - leave blank for default 096 = 96" (default) 300 = 300" (max.)
Example Part Number: SP - GLL - CL - 05 - BL - 30K - 5W - SP5								

Socket Finish


BL - Matte Black


WH - White


PC - Polished Chrome

Standard Finishes


BZ - Bronze


SG - Satin Gold

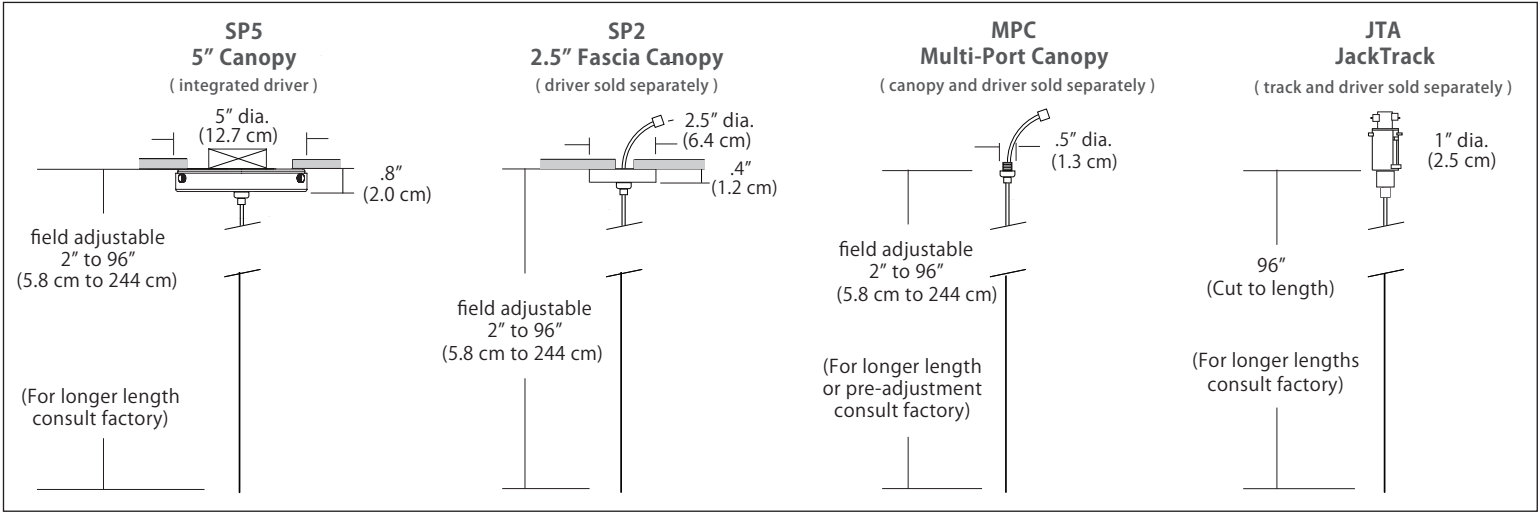

SS - Satin Silver

Special Order Powder Coat Finishes

Default Cable Finish Matches	
SOCKET	CABLE
Black	Black
White	Clear Silver
Bronze	Black
Satin Gold	Black
Satin Silver	Clear Silver

Mounting























- SP5** = 5" round canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box
Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)
- SP2** = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)
Cable with modular connector (and optional wire harness) attaches to a remote driver
- MPC** = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately)
Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)
MPC options include:
Solo Systems, Duo Systems, Quatro Systems, and JackTrack Systems
MPC, MPR, MS, MQ, MD canopies
- JTA** = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately)
Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter



Cable Length

- 096** = 96" (Default Length).
- XXX** = Custom Length (300" = maximum length)
- For Custom Lengths, please indicate length in inches.

For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjack.com.

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. (12.7 cm)	 .8" (2 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. (6.4 cm)	 .4" (1.3 cm) (Remote Driver required)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPS MQ	24" Multi-Port Square - 9 Port C-MPS-2409-# MQ-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-# MQ-2425-#	 8" OC (20.3 cm) 23.9" (60.7 cm) 9 Port  4.8" OC (12.2 cm) 23.9" (60.7 cm) 25 Port	 21.5" (54.6 cm) 2.5" (6 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPT MD	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# MD-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-# MD-3818-#	 7.5" OC (19 cm) 3" OC (7.6 cm) 37.7" (97.8 cm) 10 Port  4.1" OC (10.4 cm) 2.5" OC (6.4 cm) 37.7" (97.8 cm) 18 Port	 4.7" (11.9 cm) 2.5" (6 cm) 6" 15.2 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPL	22" Multi-Port Linear - 5 Port C-MPL-2205-# MS-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-# MS-4811-#	 4.4" OC (11.2 cm) 2.8" (7 cm) 21.8" (56 cm) 5 Port  4.4" OC (11.2 cm) 2.8" (7 cm) 48" (123 cm) 11 Port	 2.8" (7 cm) 1.4" (4 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPR	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 11" dia. (27.9 cm) 7.4" OC (18.8 cm) 3 Port  11" dia. (27.9 cm) 2.9" OC (7.4 cm) 9 Port	 10" dia. (25.4 cm) 2.1" (5.3 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPR	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 20" dia. (50.8 cm) 14.5" OC (36.8 cm) 3 Port  20" dia. (50.8 cm) 6.4" OC (16.3 cm) 12 Port	 18" dia. (45.7 cm) 2.5" (6 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack 48" JackTrack 94" JackTrack	 1.75" (4.5 cm) 23" (58.4 cm)  1.75" (4.5 cm) 47" (119.4 cm)  1.75" (4.5 cm) 94" (238.8 cm)	 1.38" (3.5 cm) 1.75" (4.5 cm) (Integrated or Remote Driver)	BL Matte Black WH White

For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjack.com.

System	Pendant Mounting	Configuration Examples		Finish Options
Quatro 4S (4' 2x2 / 9 Port) MQ-2409-XX-4S-X-XXXK		Square Configurations 	6S (6' 3x3 / 25 Port) MQ-2425-XX-6S-X-XXXK	BL Matte Black PC Pol. Chrome BZ Bronze SG Satin Gold SS Satin Silver
		Linear Configurations 	6L (6' x2' / 25 Port) MQ-2425-XX-6L-X-XXXK	
Duo 6L (6'4"x6" / 10 Port) MD-3810-XX-6L-X-XXXK 9L (9'6"x6" / 18 Port) MD-3818-XX-9L-X-XXXK		Linear Configurations 	9L (9'6"x6" / 18 Port) MD-3818-XX-9L-X-XXXK	BL Matte Black PC Pol. Chrome BZ Bronze SG Satin Gold SS Satin Silver
Solo Solo 48" Linear Configuration Solo 22" Grid Configuration			Solo (L) Configuration 	BL Matte Black PC Pol. Chrome BZ Bronze SG Satin Gold SS Satin Silver
			Solo 48" Grid Configuration 	

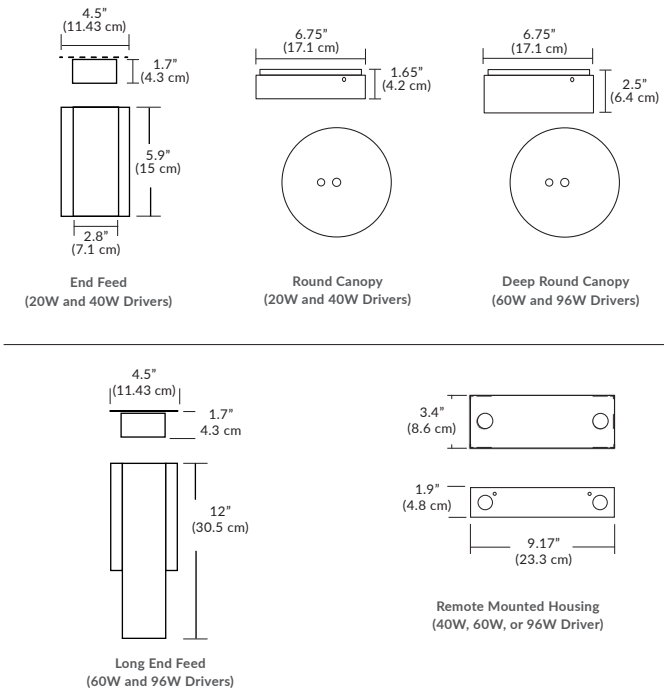
For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjacklighting.com.

Universal Drivers



Universal dimmable (TRIAC, ELV or 0-10V), Flicker-free dimming 100% to 2% (with optimal configuration), auto reset, short circuit, overload and thermal protection.
NOTE: Total pendant wattage needs to be 10% less than driver wattage.

SKU	Watts	Output Volts	Input Volts	Mounting	Dimming
PS-94ST-20W-27U-IN	20W	24V	120V - 277V	Integral in End Feed	(27U)
PS-94ST-20W-27U-IC	20W	24V	120V - 277V	Inside Round Canopy	(27U)
PS-94ST-40W-27U-IN	40W	24V	100V - 305V	Integral in End Feed	(27U)
PS-94ST-40W-27U-IC	40W	24V	120V - 277V	Inside Round Canopy	(27U)
PS-94ST-60W-27U-IN	60W	24V	120V - 277V	Integral in End Feed	(27U)
PS-94ST-60W-27U-IC	60W	24V	120V - 277V	Inside Round Canopy	(27U)
PS-94ST-96W-27U-IN	96W	24V	120V - 277V	Integral in End Feed	(27U)
PS-94ST-96W-27U-IC	96W	24V	120V - 277V	Inside Round Canopy	(27U)
PS-94ST-40W-27U-RE	40W	24V	100V - 305V	Remote	(27U)
PS-94ST-60W-27U-RE	60W	24V	120V - 277V	Remote	(27U)
PS-94ST-96W-27U-RE	96W	24V	120V - 277V	Remote	(27U)



DRIVER ORDERING GUIDE

Type

PS

PS Power Supply

-

Series

94ST

94ST Universal (Standard)

-

Watts

20W - 20 Watts
40W - 40 Watts
60W - 60 Watts
96W - 96 Watts

-

Dimming

27U

27U
120-277V/ Universal Dimming (TRIAC / ELV / 0-10V)

-

Mounting

IN Integral
RE Remote
IC Inside Canopy

Example: PS-94ST-96W-27U-RE