
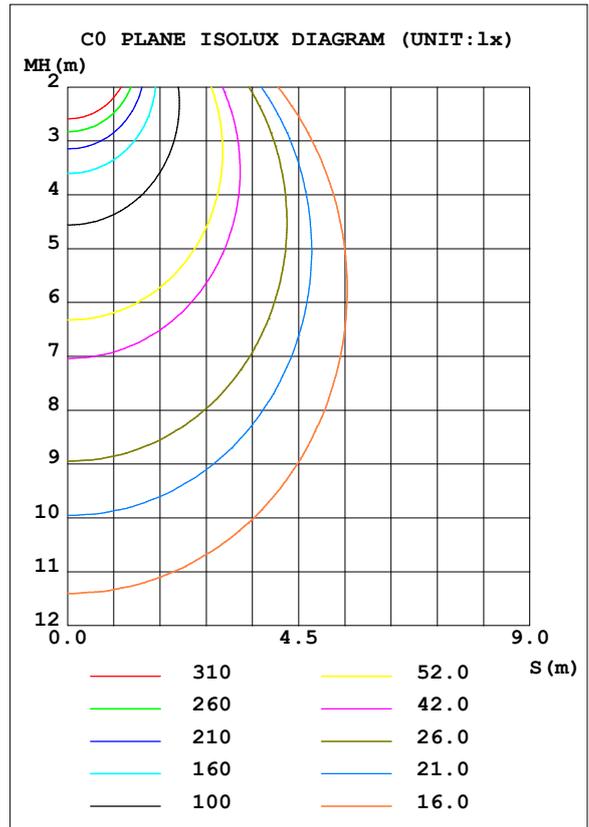


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:121.3V I:0.4130A P:49.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5720.11x1 lm		
NAME: 9700-BLS2-PROFILE-4F-DU-WH-50W-30K-0.10	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:1.2*0.05	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 114.63 lm/W			
MODEL		Imax (cd)	2070	S/MH (C0/180)	1.24
NOMINAL POWER (W)	50W	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	120.0	TOTAL FLUX (lm)	5720.1	η UP, DN (C0-180)	0.1, 50.4
NOMINAL FLUX (lm)	5720.11	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 49.3
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120.0	η down (%)	99.8	CIBSE SHR MAX	1.35

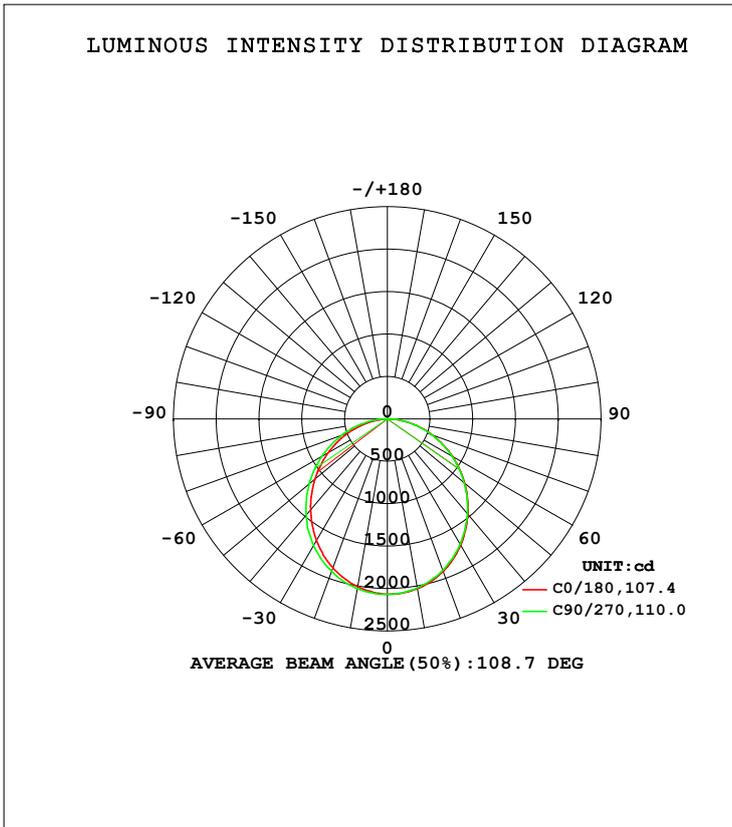

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-07-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2031	2026	2022	2023	2005	2016	2031	2027	0- 10	195.2	195.2	3.41,3.41
20	1914	1907	1897	1893	1868	1887	1911	1902	10- 20	555.6	750.8	13.1,13.1
30	1715	1713	1705	1699	1657	1685	1725	1709	20- 30	832.3	1583	27.7,27.7
40	1469	1465	1457	1445	1397	1434	1477	1457	30- 40	988.8	2572	45,45
50	1182	1180	1176	1159	1106	1146	1196	1171	40- 50	1011	3583	62.6,62.6
60	877.9	875.4	869.3	854.9	800.6	837.4	888.4	860.3	50- 60	905.6	4489	78.5,78.5
70	563.5	564.6	553.4	545.3	493.2	522.1	572.1	543.9	60- 70	694.2	5183	90.6,90.6
80	254.8	266.0	252.9	245.9	184.5	220.8	266.8	241.6	70- 80	414.0	5597	97.8,97.8
90	4.253	5.058	1.269	4.279	2.009	3.760	2.173	3.970	80- 90	111.5	5708	99.8,99.8
100	1.570	2.677	0.8251	2.713	1.208	1.952	0.4324	1.974	90-100	2.449	5711	99.8,99.8
110	1.401	1.605	1.230	1.716	1.028	1.144	0.7287	1.089	100-110	1.462	5712	99.9,99.9
120	1.603	1.656	1.648	1.758	1.178	1.189	1.098	1.156	110-120	1.295	5713	99.9,99.9
130	1.930	1.977	2.039	2.041	1.440	1.435	1.472	1.417	120-130	1.395	5715	99.9,99.9
140	2.282	2.265	2.374	2.367	1.734	1.745	1.790	1.677	130-140	1.448	5716	99.9,99.9
150	2.646	2.647	2.590	2.678	2.331	2.337	2.351	2.269	140-150	1.394	5718	100,100
160	3.112	3.005	2.891	3.015	2.839	2.753	2.705	2.722	150-160	1.238	5719	100,100
170	3.366	3.198	3.037	3.189	3.202	3.053	2.969	3.031	160-170	0.8543	5720	100,100
180	3.243	3.084	3.015	3.063	3.243	3.084	2.964	3.073	170-180	0.2993	5720	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:121.3V I:0.4130A P:49.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5720.11x1 lm		
NAME: 9700-BLS2-PROFILE-4F-DU-BL-50W-30K-0.10	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:1.2*0.05	Shielding Angle:

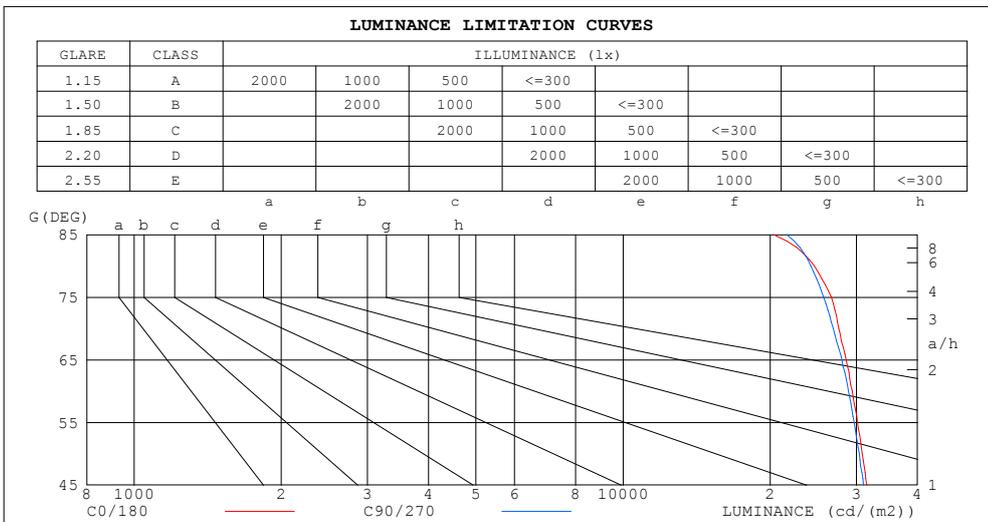

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	20304	21622
80	24600	24216
75	26656	25731
70	27624	26901
65	28602	28026
60	29437	28903
55	30159	29714
50	30839	30411
45	31501	31049


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.3V I:0.4130A P:49.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5720.11x1 lm		
NAME: 9700-BLS2-PROFILE-4F-DU-BL-50W-30K-0.10	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:1.2*0.05	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0		
	ρw	ρfc	RCR	ρw	ρfc	RCR	ρw	ρfc	RCR	ρw	ρfc	RCR	ρw	ρfc	RCR	ρw	ρfc	RCR
	50%	20%	RCR:Room Cavity Ratio	50%	20%	RCR	50%	20%	RCR									
	Coefficients of Utilization(CU)																	
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00		
1.0	1.04	.99	.96	1.01	.98	.94	.97	.94	.91	.93	.91	.88	.90	.87	.85	.83		
2.0	.90	.84	.78	.88	.82	.77	.85	.80	.75	.82	.77	.73	.78	.75	.72	.69		
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58		
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.54	.64	.58	.53	.62	.56	.52	.50		
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43		
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38		
7.0	.51	.43	.36	.51	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33		
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.44	.37	.32	.42	.36	.32	.30		
9.0	.43	.35	.29	.42	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27		
10.0	.40	.32	.27	.39	.32	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24		

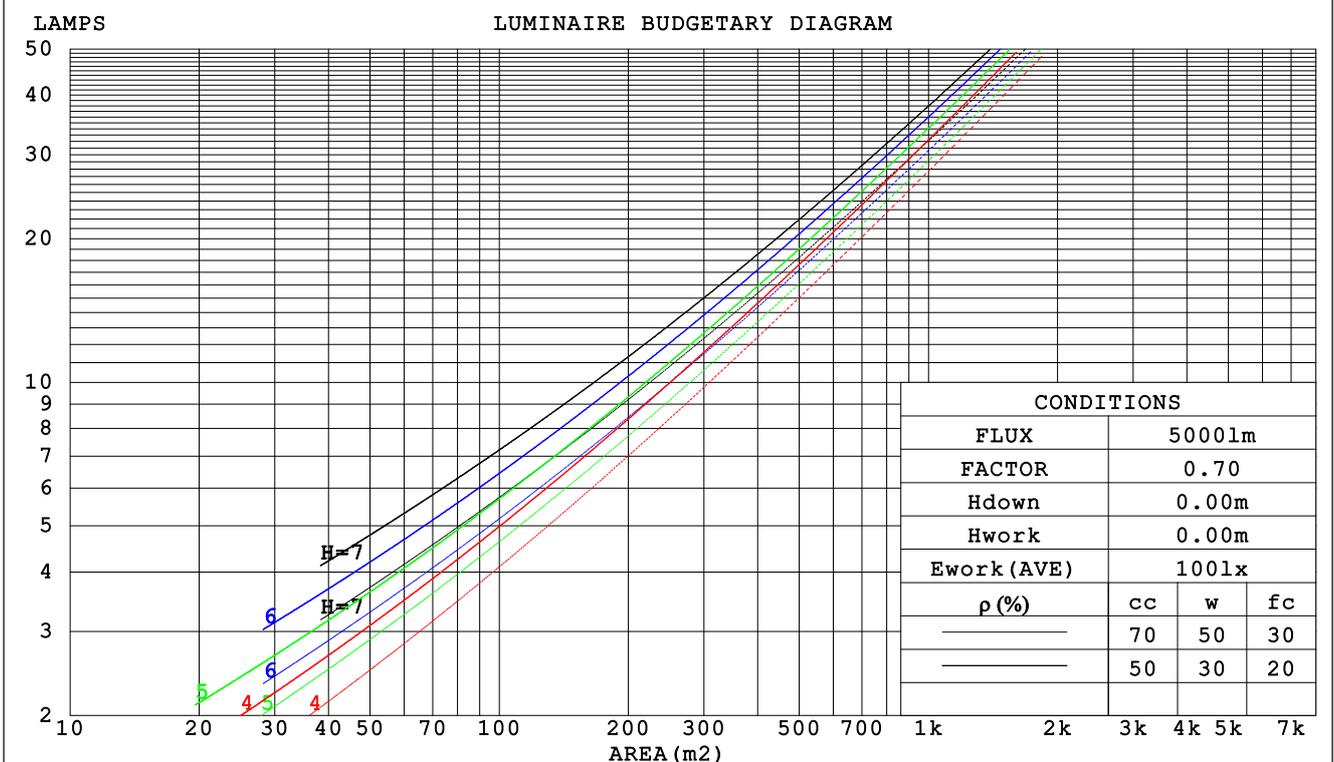

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-07-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:121.3V I:0.4130A P:49.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5720.11x1 lm		
NAME: 9700-BLS2-PROFILE-4F-DU-BL-50W-30K-0.10	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:1.2*0.05	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.310	.177	.056	.303	.173	.055	.290	.166	.053	.278	.160	.051	.266	.154	.050	
2.0	.292	.160	.049	.285	.157	.048	.274	.152	.047	.263	.147	.046	.253	.143	.045	
3.0	.270	.144	.043	.264	.141	.043	.254	.137	.042	.244	.134	.041	.235	.130	.040	
4.0	.249	.129	.038	.244	.128	.038	.235	.124	.037	.226	.121	.037	.218	.118	.036	
5.0	.230	.117	.034	.225	.116	.034	.217	.113	.033	.210	.111	.033	.202	.108	.032	
6.0	.213	.107	.031	.209	.106	.030	.202	.103	.030	.195	.101	.030	.189	.099	.029	
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.093	.027	.176	.092	.027	
8.0	.185	.090	.025	.182	.090	.025	.176	.088	.025	.171	.086	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.080	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.151	.075	.021	.147	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.158	.136	.156	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.134	.100	.149	.115	.086	.102	.080	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.142	.100	.066	.098	.069	.046	.056	.041	.027	.018	.013	.009	
4.0	.158	.103	.060	.136	.089	.052	.093	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.049	.130	.080	.043	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.041	.124	.073	.036	.085	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.067	.030	.081	.047	.022	.047	.028	.013	.015	.009	.004	
8.0	.130	.071	.030	.112	.062	.027	.078	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.124	.066	.027	.107	.057	.023	.074	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:121.3V I:0.4130A P:49.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5720.11x1 lm										
NAME: 9700-BLS2-PROFILE-4F-DU-BL-50W-30K-0.10					TYPE:3000K			WEIGHT:		
SPEC.:					DIM.: 4FT			SERIAL No.:		
MFR.:					SUR.:1.2*0.05			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.7	26.2	25.0	26.4	26.7	24.7	26.2	24.9	26.4	26.6
3H	26.3	27.7	26.6	27.9	28.2	26.2	27.6	26.5	27.9	28.1
4H	27.0	28.3	27.3	28.6	28.8	26.9	28.2	27.2	28.5	28.7
6H	27.5	28.8	27.8	29.0	29.3	27.4	28.6	27.7	28.9	29.2
8H	27.7	28.9	28.0	29.2	29.5	27.6	28.8	27.9	29.1	29.4
12H	27.8	28.9	28.1	29.2	29.5	27.7	28.8	28.0	29.1	29.4
4H 2H	25.3	26.7	25.7	26.9	27.2	25.3	26.6	25.6	26.9	27.1
3H	27.1	28.3	27.5	28.6	28.9	27.1	28.2	27.4	28.5	28.8
4H	27.9	29.0	28.3	29.3	29.7	27.8	28.9	28.2	29.2	29.6
6H	28.6	29.5	29.0	29.9	30.3	28.5	29.4	28.9	29.8	30.2
8H	28.8	29.7	29.2	30.1	30.5	28.7	29.6	29.1	30.0	30.4
12H	29.0	29.8	29.4	30.2	30.6	28.9	29.7	29.3	30.1	30.5
8H 4H	28.2	29.1	28.7	29.5	29.9	28.2	29.0	28.6	29.4	29.8
6H	29.1	29.8	29.5	30.2	30.6	29.0	29.7	29.4	30.1	30.6
8H	29.4	30.0	29.8	30.5	30.9	29.3	30.0	29.8	30.4	30.8
12H	29.6	30.2	30.1	30.6	31.1	29.6	30.1	30.0	30.6	31.1
12H 4H	28.3	29.1	28.7	29.5	29.9	28.2	29.0	28.6	29.4	29.8
6H	29.1	29.8	29.6	30.2	30.7	29.1	29.7	29.5	30.1	30.6
8H	29.5	30.1	30.0	30.5	31.0	29.4	30.0	29.9	30.5	30.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117 Corrected 5720 lm Total Lamp Luminous Flux. (8log(F/F0) = 6.1)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:121.3V I:0.4130A P:49.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5720.11x1 lm		
NAME: 9700-BLS2-PROFILE-4F-DU-BL-50W-30K-0.10	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:1.2*0.05	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	33
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	76	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:121.3V I:0.4130A P:49.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5720.11x1 lm		
NAME: 9700-BLS2-PROFILE-4F-DU-BL-50W-30K-0.10	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:1.2*0.05	Shielding Angle:

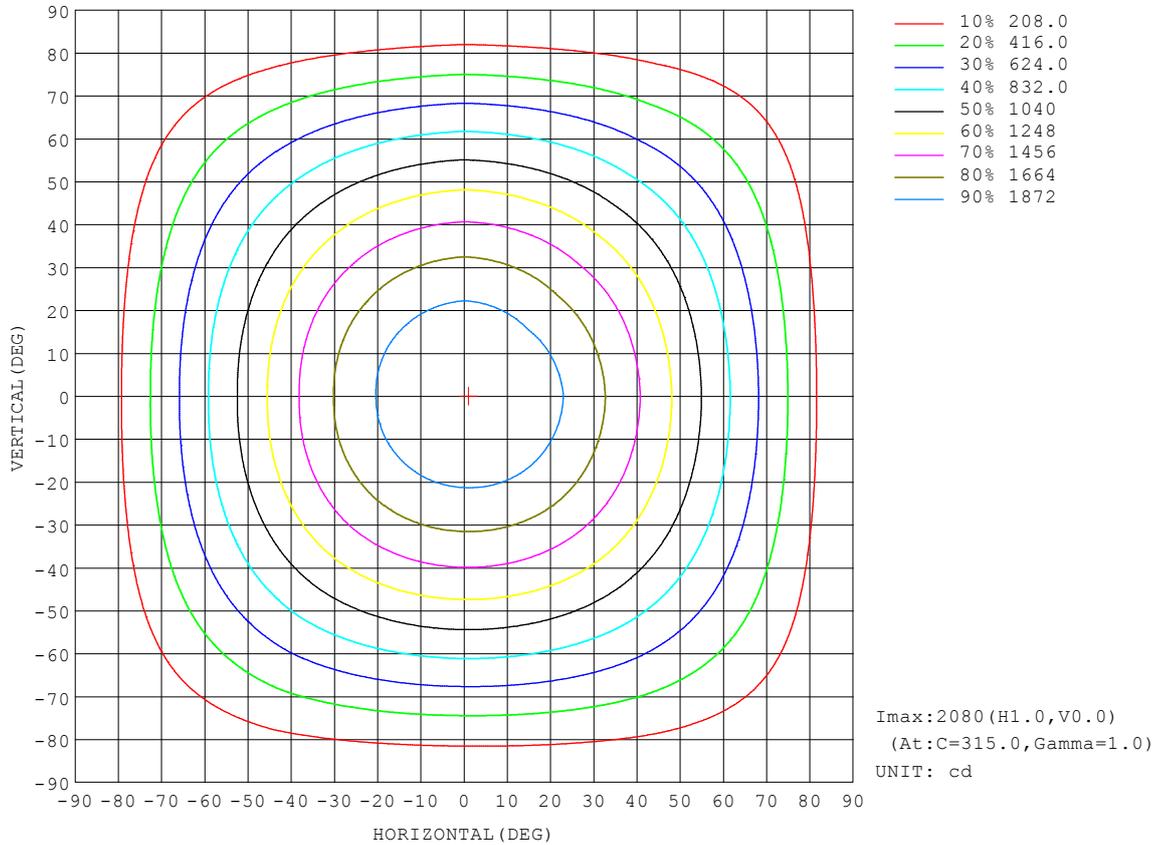


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

AAI Figure

Test:U:121.3V I:0.4130A P:49.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5720.11x1 lm		
NAME: 9700-BLS2-PROFILE-4F-DU-BL-50W-30K-0.10	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:1.2*0.05	Shielding Angle:

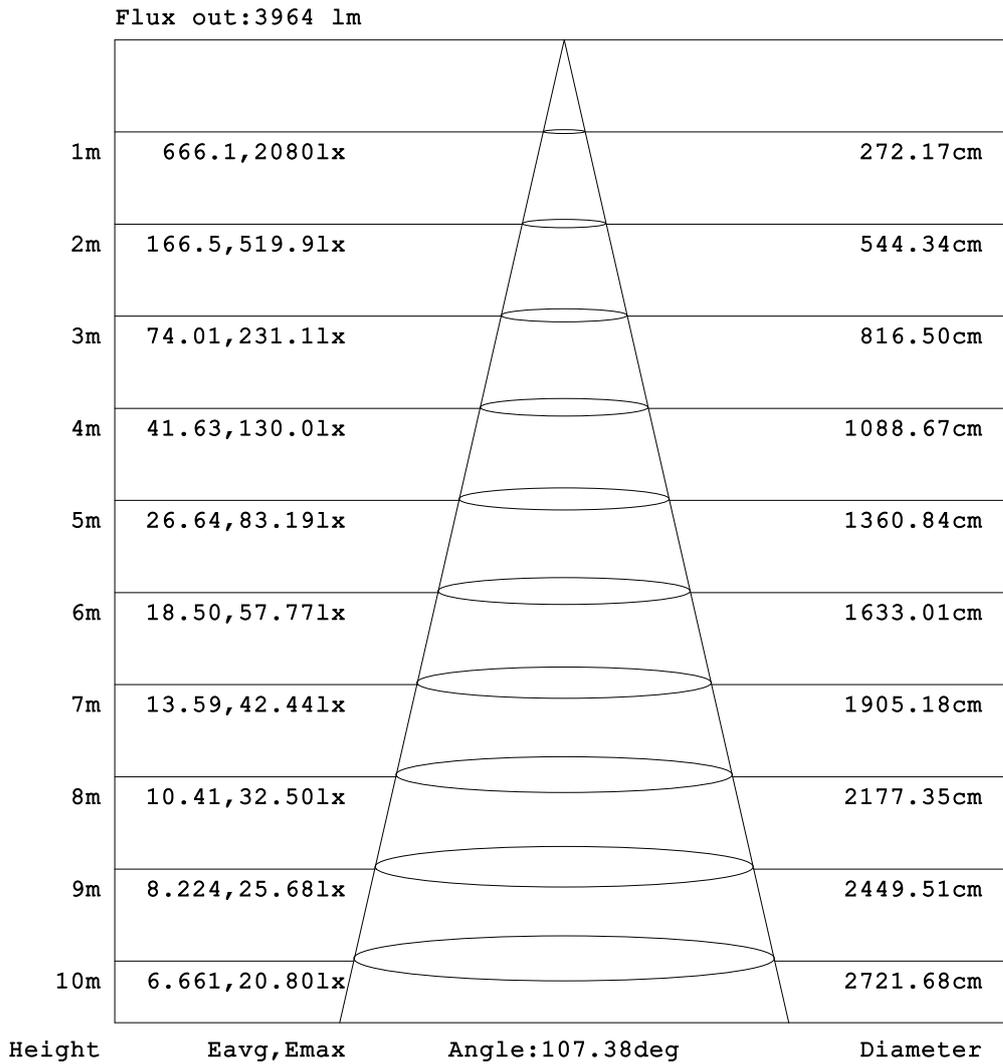


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:121.3V I:0.4130A P:49.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5720.11x1 lm		
NAME: 9700-BLS2-PROFILE-4F-DU-BL-50W-30K-0.10	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:1.2*0.05	Shielding Angle:

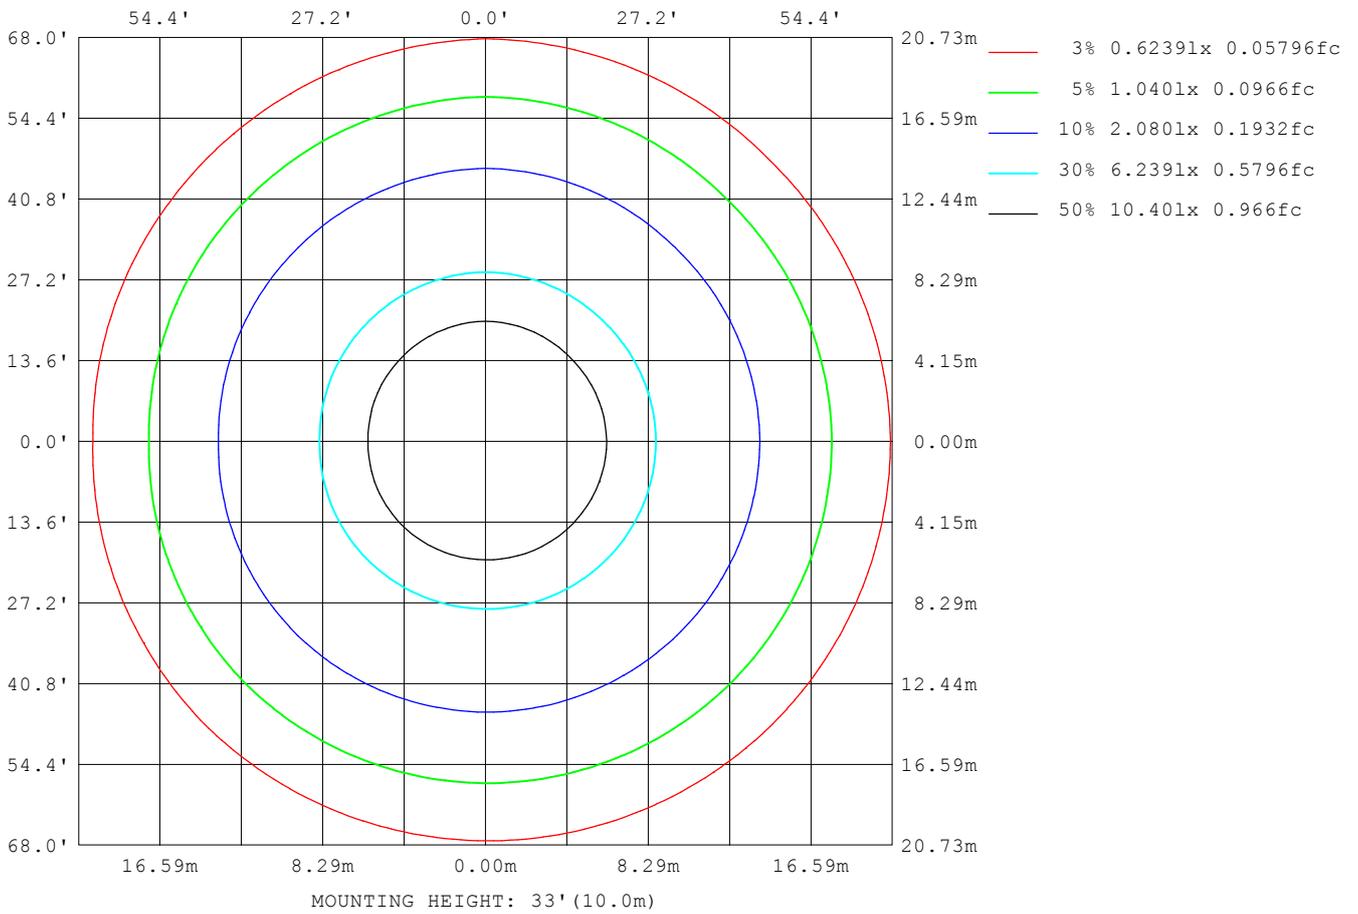

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:121.3V I:0.4130A P:49.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5720.11x1 lm		
NAME: 9700-BLS2-PROFILE-4F-DU-BL-50W-30K-0.10	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:1.2*0.05	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	26949
L_0~180 (75) av	24109
L_0~180 (85) av	13928
L_90~270 (65) av	28438
L_90~270 (75) av	26314
L_90~270 (85) av	22300
L_45 (65) av	27686
L_45 (75) av	25314
L_45 (85) av	17766

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

Planar Illuminance Curve

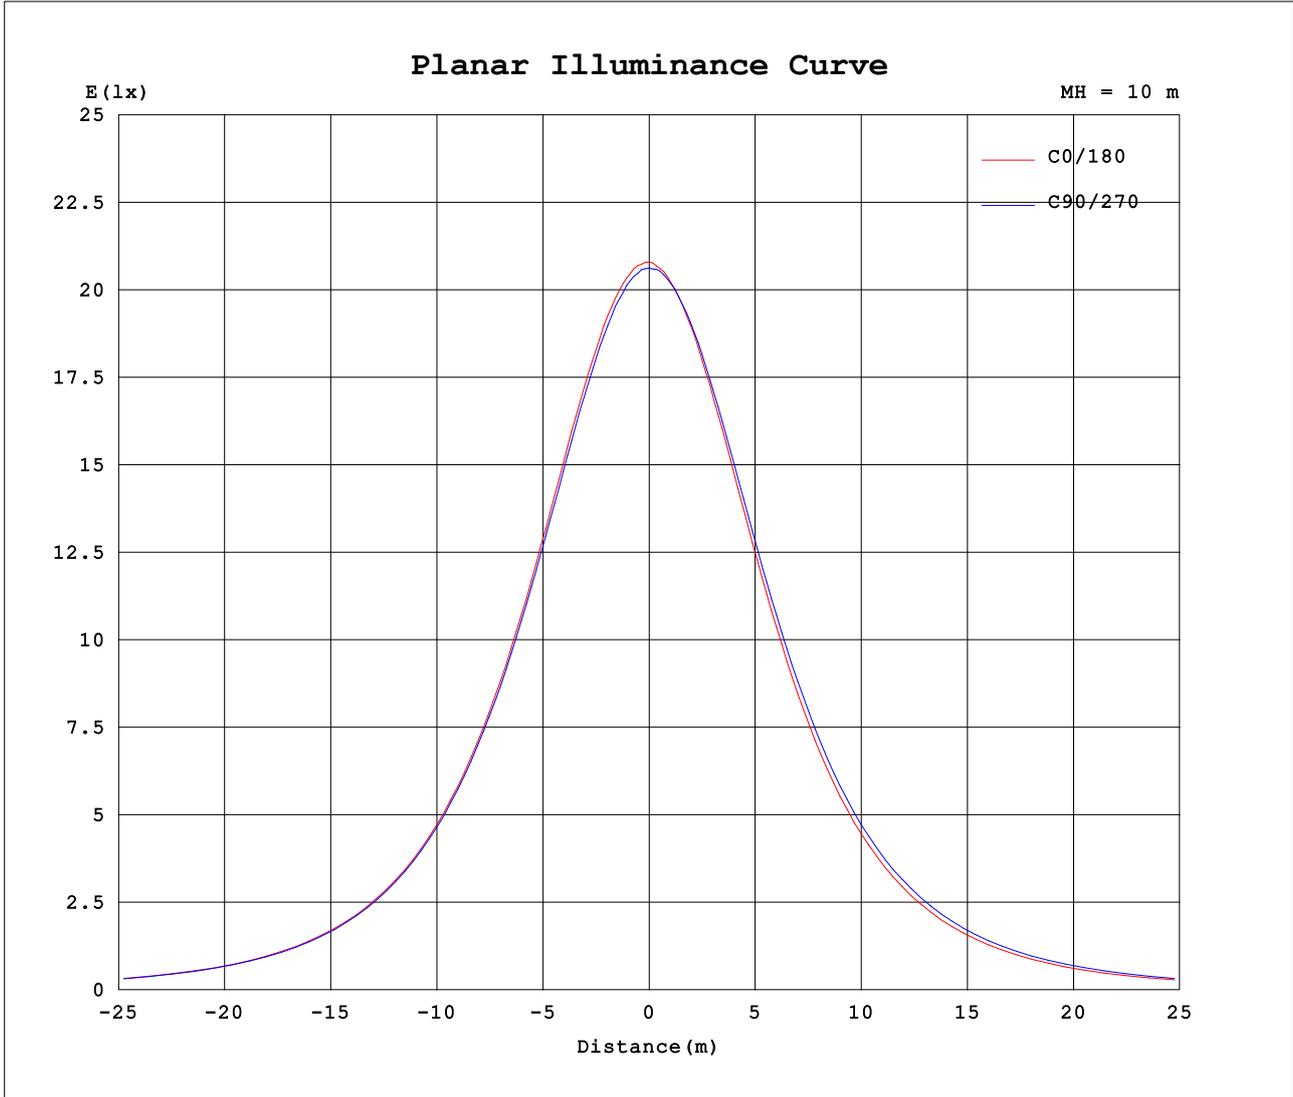

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-07-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.3V I:0.4130A P:49.90W PF:0.9950 Freq:50.00Hz Lamp Flux:5720.11x1 lm		
NAME: 9700-BLS2-PROFILE-4F-DU-BL-50W-30K-0.10	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 4FT	SERIAL No.:
MFR.:	SUR.:1.2*0.05	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315										
0	2067	2067	2067	2067	2067	2067	2067	2067										
5	2059	2058	2056	2055	2049	2053	2059	2060										
10	2031	2026	2022	2023	2005	2016	2031	2027										
15	1983	1976	1969	1968	1946	1961	1981	1975										
20	1914	1907	1897	1893	1868	1887	1911	1902										
25	1822	1817	1810	1803	1772	1794	1829	1812										
30	1715	1713	1705	1699	1657	1685	1725	1709										
35	1597	1596	1585	1578	1533	1565	1611	1588										
40	1469	1465	1457	1445	1397	1434	1477	1457										
45	1329	1327	1321	1304	1255	1294	1340	1318										
50	1182	1180	1176	1159	1106	1146	1196	1171										
55	1032	1030	1025	1010	954	995	1045	1017										
60	878	875	869	855	801	837	888	860										
65	721	721	712	699	646	683	730	705										
70	564	565	553	545	493	522	572	544										
75	412	414	401	396	337	372	417	391										
80	255	266	253	246	184	221	267	242										
85	106	113	113	94.9	40.1	72.2	120	91.4										
90	4.25	5.06	1.27	4.28	2.01	3.76	2.17	3.97										
95	1.91	3.74	0.66	3.73	1.54	2.91	0.33	3.06										
100	1.57	2.68	0.83	2.71	1.21	1.95	0.43	1.97										
105	1.38	1.93	1.03	2.01	1.06	1.39	0.57	1.35										
110	1.40	1.60	1.23	1.72	1.03	1.14	0.73	1.09										
115	1.46	1.59	1.46	1.68	1.09	1.11	0.92	1.07										
120	1.60	1.66	1.65	1.76	1.18	1.19	1.10	1.16										
125	1.75	1.80	1.84	1.88	1.31	1.31	1.27	1.25										
130	1.93	1.98	2.04	2.04	1.44	1.44	1.47	1.42										
135	2.08	2.12	2.21	2.20	1.58	1.60	1.63	1.55										
140	2.28	2.27	2.37	2.37	1.73	1.74	1.79	1.68										
145	2.44	2.44	2.40	2.53	1.98	1.99	1.97	1.94										
150	2.65	2.65	2.59	2.68	2.33	2.34	2.35	2.27										
155	2.87	2.83	2.78	2.86	2.57	2.55	2.55	2.50										
160	3.11	3.00	2.89	3.01	2.84	2.75	2.71	2.72										
165	3.29	3.13	2.96	3.15	3.07	2.92	2.86	2.91										
170	3.37	3.20	3.04	3.19	3.20	3.05	2.97	3.03										
175	3.33	3.17	3.06	3.17	3.25	3.06	2.97	3.05										
180	3.24	3.08	3.02	3.06	3.24	3.08	2.96	3.07										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-07-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: