

BLS2 LINEAR SLOT – PENDANT DOWN AND UPLIGHT

2in. Profile / Direct and Indirect Illumination / Selectable Output



SPECIFICATIONS

Output (per linear ft.)	Medium (959 lm/ft.) High (1240 lm/ft.) Very High (1480 lm/ft.)
Light Distribution	50% Down / 50% Up 70% Down / 30% Up 100% Down
CCT / Color Temperature	3000K, 3500K, or 4000K
Color Rendering Index (CRI)	90+
Voltage	120-277V
Dimming	0-10V (<10%-100%)
Weight	Approx. 1.3 lb./ft. (may vary depending on additional options selected)
Environment	Suitable for Damp Location installations. Operating temperature range: -25°C to 50°C (-13°F to 122°F)
Materials	Aluminum housing with PC lens and endcaps
Finish Color	Black (BL) or White (WH) - powder coated



ORDERING GUIDE

Example: BLS2 - PDU - 4F - H - 50 - 30K - BL



PRODUCT CODE

SERIES	MOUNTING	LENGTH	OUTPUT	LIGHT DISTRIBUTION	CCT	FINISH
BLS2 BLS2 Blackjack Linear Slot	PDU PDU Pendant Down and Uplight	<input type="text"/> 2F 2 ft. (nominal) 4F 4 ft. (nominal) 8F 8 ft. (nominal) <i>Consult factory for custom lengths.</i>	<input type="text"/> Standard M Medium H High V Very High Custom D### - U### (Select lm/ft) <i>Consult factory for custom outputs.</i>	<input type="text"/> 50 50% Down / 50% Up 70 70% Down / 30% Up 100 100% Down	<input type="text"/> 30K 3000K 35K 3500K 40K 4000K	<input type="text"/> Standard BL Black WH White Special Order BZ Bronze SS Satin Silver SG Satin Gold Other CS Customer Specification

OPTIONS



MOUNTING DETAIL	SUSPENSION LENGTH	VOLTAGE	DRIVER	DRIVER LOCATION	OTHER
<input type="text"/> T Drop Ceiling/ T-Grid Adapter F Recessed / Full-Length Rails <i>None is default. Leave blank for none.</i>	<input type="text"/> 72 72in (max.) (default) 300 300in (max.) <i>Leave blank for default.</i>	<input type="text"/> UNV Universal 120-277V (default) <i>Leave blank for default.</i>	<input type="text"/> ZT 0-10V (10% dimming) (default) <i>Leave blank for default.</i>	<input type="text"/> I Internal (default) <i>Leave blank for default.</i>	<input type="text"/> MH Mid-Run Power Harness Adapter <i>None is default. Leave blank for none.</i>

MOUNTING

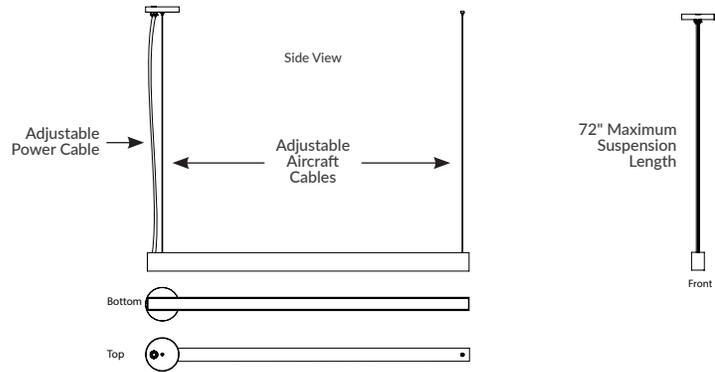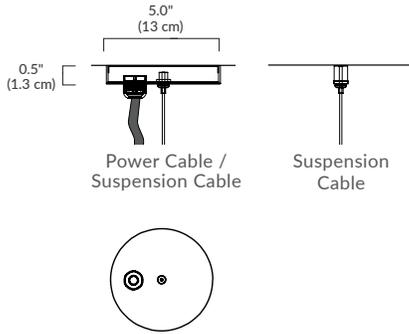

NOTE: Standard hard ceiling kit shown (optional Drop/T-Grid hardware available).

DIMENSIONS

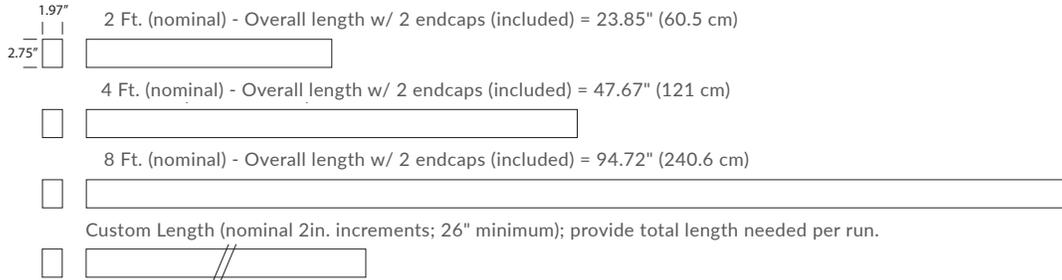

NOTE: Maximum length from single power source = 32 Ft. (7 x 4 Ft. units or 4 x 8 ft. units)

OUTPUT (Standard @ 3000K)

	100 (100% DOWN)			70 (70% DOWN / 30% UP)			50 (50% DOWN / 50% UP)		
	MEDIUM	HIGH	VERY HIGH	MEDIUM	HIGH	VERY HIGH	MEDIUM	HIGH	VERY HIGH
PER FT.	909 LM 7.5 W	1192 LM 10 W	1430 LM 12.5 W	947 LM 7.5 W	1212 LM 10 W	1452 LM 12.5 W	959 LM 7.5 W	1240 LM 10 W	1480 LM 12.5 W
EFFICACY (LM/W)	121 LM/W	119 LM/W	114 LM/W	126 LM/W	121 LM/W	116 LM/W	128 LM/W	124 LM/W	118 LM/W
STD. LENGTHS									
2 FT.	1812 LM 15 W	2385 LM 20 W	2871 LM 25 W	1876 LM 15 W	2978 LM 20 W	2967 LM 25 W	1913 LM 15 W	2511 LM 20 W	3139 LM 25 W
4 FT.	3635 LM 30 W	4959 LM 40 W	5921 LM 50 W	3789 LM 30 W	4848 LM 40 W	5807 LM 50 W	3835 LM 30 W	4959 LM 40 W	5921 LM 50 W
8 FT.	7270 LM 60 W	9534 LM 80 W	11440 LM 100 W	7578 LM 60 W	9696 LM 80 W	11614 LM 100 W	7670 LM 60 W	9918 LM 80 W	11842 LM 100 W
PHOTOMETRY									


NOTE: Photometry based on a [4-ft.] profile @ [30K] CCT.

LUMEN MULTIPLIER CHART



CCT	MULTIPLIER
30K	1.00
35K	1.061
40K	1.067

CONNECTOR ACCESSORIES (optional)


**Internal
for Pendant/Wall Mount
"CIPW"**

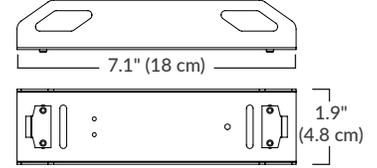


**L-Shape
"CL"**

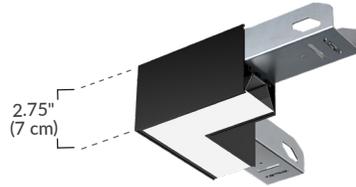

**T-Shape
"CT"**

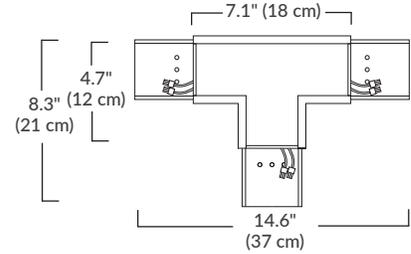

**X-Shape
"CX"**

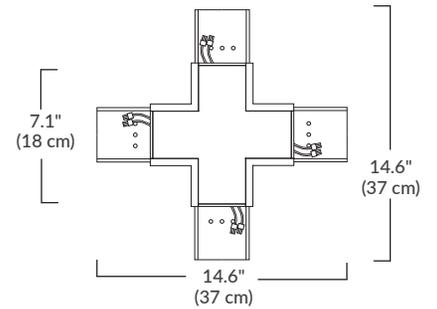

ORDERING GUIDE - ACCESSORIES

SERIES

BLS2

BLS2
Blackjack Linear
Slot

CONNECTOR TYPE



CIPW - Internal (Pendant/Wall)
 CL - L-shape
 CT - T-shape
 CX - X shape

Leave blank for CISR/CIPW.

FINISH



Standard
 BL Black
 WH White
Special Order
 BZ Bronze
 SS Satin Silver
 SG Satin Gold

Other
 CS Customer Specification

Example: BLS2 - CL - WH