


BLS2 LINEAR SLOT – RECESSED DOWNLIGHT

2in Profile / Direct Illumination / Selectable Output

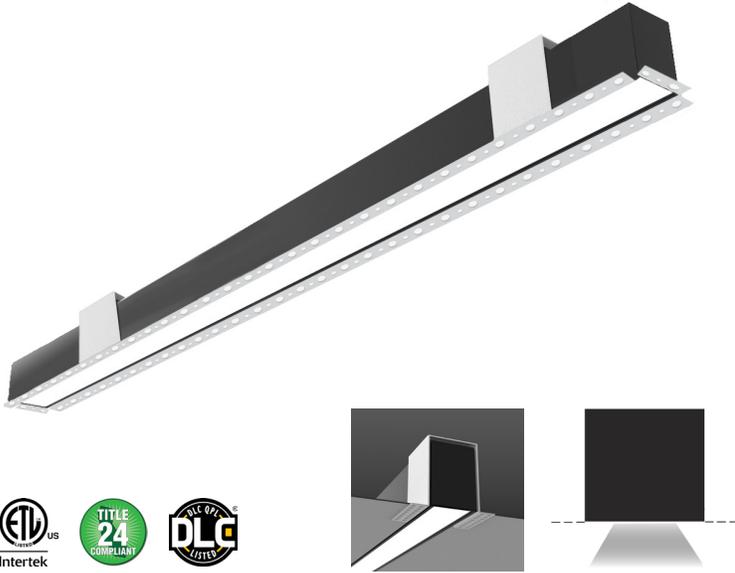

SPECIFICATIONS

| | |
|-----------------------------|---|
| Output (per linear ft.) | Medium (909 lm/ft.) High (1192 lm/ft.) Very High (1430 lm/ft.) |
| CCT / Color Temperature | 3000K, 3500K, or 4000K |
| Color Rendering Index (CRI) | 90+ |
| Voltage | 120-277V |
| Driver | 0-10V (10%-100%) |
| Weight | Approx. 1.3 lb./ft. (may vary depending on additional options selected) |
| Environment | Suitable for Damp Location installations. Operating temperature range: -25°C to 50°C (-13°F to 122°F) |
| Materials | Aluminum housing with PC lens and endcaps |
| Finish Color | Black (BL) or White (WH) - powder coated |



ORDERING GUIDE

Example: BLS2 - RD - 4F - H - 100 - 30K - BL

PRODUCT CODE →

| SERIES | MOUNTING | LENGTH | OUTPUT | LIGHT DISTRIBUTION | CCT | FINISH |
|---|---------------------------------------|---|---|--------------------------------|---|---|
| BLS2 BLS2 Blackjack Linear Slot | RD RD Recessed Downlight | 4F 2F 2 ft. (nominal) 4F 4 ft. (nominal) 8F 8 ft. (nominal) Consult factory for custom lengths. | H Standard M Medium H High V Very High Custom D### (Select lm/ft) Consult factory for custom outputs. | 100 100 100% Down | 30K 30K 3000K 35K 3500K 40K 4000K | BL Standard BL Black WH White Special Order BZ Bronze SS Satin Silver SG Satin Gold Other CS Customer Specification |


MOUNTING

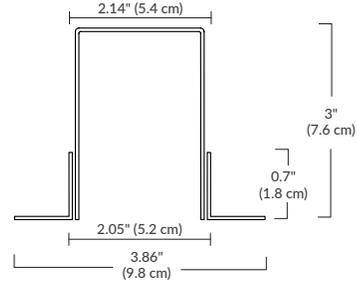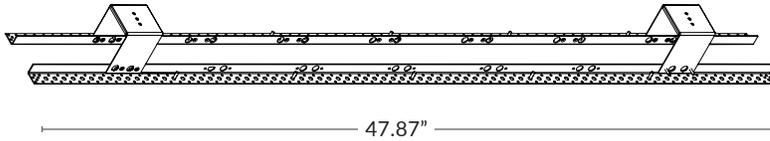

NUMBER OF U-BRACKETS INCLUDED:
 2 ft. - 2 (Two)
 4 ft. - 2 (Two)
 8 ft. - 3 (Three)

DIMENSIONS

- 1.97" 2 Ft. (nominal) - Overall length w/ 2 endcaps (included) = 23.85" (60.5 cm)
- 2.75" 4 Ft. (nominal) - Overall length w/ 2 endcaps (included) = 47.67" (121 cm)
- 8 Ft. (nominal) - Overall length w/ 2 endcaps (included) = 94.72" (240.6 cm)
- Custom Length (nominal 2in. increments; 26" minimum); provide total length needed per run.
-



NOTE: Maximum length from single power source = 32 Ft. (7 x 4 Ft. units or 4 x 8 ft. units)

OUTPUT (Standard @ 3000K)

| | MEDIUM | 100 (100% DOWN) HIGH | VERY HIGH |
|-----------------|-----------------|----------------------------|-------------------|
| PER FT. | 909 LM 7.5 W | 1192 LM 10 W | 1430 LM 12.5 W |
| EFFICACY (LM/W) | 121 LM/W | 119 LM/W | 114 LM/W |
| STD. LENGTHS | | | |
| 2 FT. | 1812 LM 15 W | 2385 LM 20 W | 2871 LM 25 W |
| 4 FT. | 3635 LM 30 W | 4959 LM 40 W | 5921 LM 50 W |
| 8 FT. | 7270 LM 60 W | 9534 LM 80 W | 11440 LM 100 W |
| PHOTOMETRY | | | |


NOTE: Photometry based on a 4-ft. profile @ 30K CCT.

LUMEN MULTIPLIER CHART



| CCT | MULTIPLIER |
|-----|------------|
| 30K | 1.00 |
| 35K | 1.061 |
| 40K | 1.067 |

CONNECTOR ACCESSORIES (optional)


Internal
for Surfaced/Recessed Mount
"CISR"

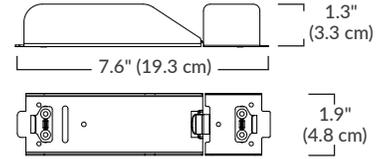


L-Shape
"CL"

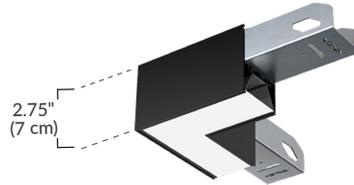

T-Shape
"CT"

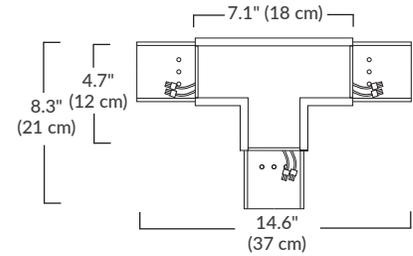

X-Shape
"CX"

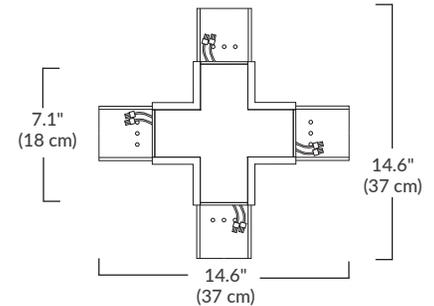

ORDERING GUIDE - ACCESSORIES

SERIES

BLS2

BLS2
Blackjack Linear
Slot

CONNECTOR TYPE



CISR - Internal (Surface/Recessed)
CL - L-shape
CT - T-shape
CX - X shape

FINISH



Standard
BL Black
WH White

Special Order
BZ Bronze
SS Satin Silver
SG Satin Gold

Other

CS Customer Specification

Leave blank for CISR/CIPW.

Example: BLS2 - CL - WH