


BLS2 LINEAR – SURFACE DOWNLIGHT

2in Profile / Direct Illumination / Selectable Output

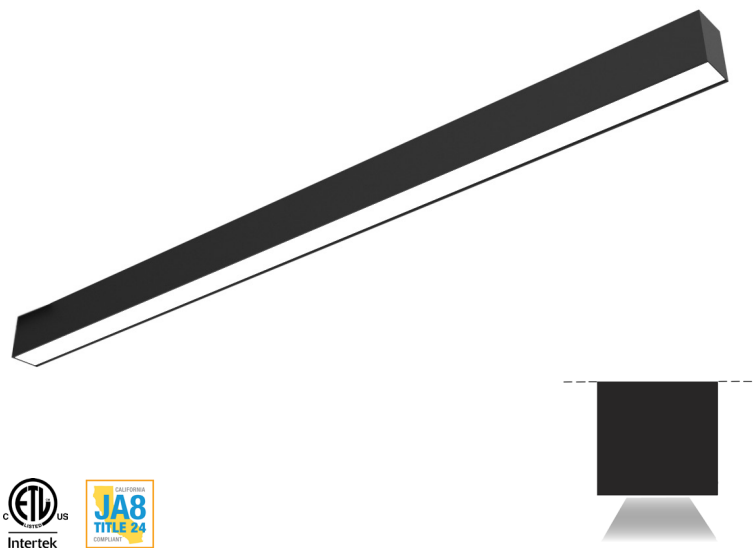

SPECIFICATIONS

Output (per linear ft.)	Medium (909 lm/ft.) High (1192 lm/ft.) Very High (1430 lm/ft.)
CCT / Color Temperature	3000K, 3500K, or 4000K
Color Rendering Index (CRI)	90+
Voltage	120-277V
Driver	0-10V (10%-100%)
Weight	Approx. 1.3 lb./ft. (may vary depending on additional options selected)
Environment	Suitable for Damp Location installations. Operating temperature range: -25°C to 50°C (-13°F to 122°F)
Materials	Aluminum housing with PC lens and endcaps
Finish Color	Black (BL) or White (WH) - powder coated

ORDERING GUIDE

Example: BLS2 - SD - 4F - H - 100 - 30K - BL

PRODUCT CODE

SERIES

BLS2

BLS2
Blackjack Linear
Slot

MOUNTING

SD

SD
Surface Downlight

LENGTH

2F 2 ft. (nominal)
4F 4 ft. (nominal)
8F 8 ft. (nominal)

Consult factory for
custom lengths.

OUTPUT

Standard
M Medium
H High
V Very High

Custom
D### - U###
(Select lm/ft)

Consult factory for
custom outputs.

LIGHT DISTRIBUTION

100

100
100% Downlight

CCT

30K 3000K
35K 3500K
40K 4000K

FINISH

Standard
BL Black
WH White

Special Order
BZ Bronze
SS Satin Silver
SG Satin Gold

Other
CS Customer Specification

OPTIONS

MOUNTING
DETAIL

T Drop Ceiling/
T-Grid Adapter
F Recessed /
Full-Length Rails

None is default.
Leave blank for none.

VOLTAGE

UNV
Universal 120-277V
(default)

Leave blank for
default.

DRIVER

ZT
0-10V (10% dimming)
(default)

Leave blank for
default.

DRIVER
LOCATION

I Internal
(default)


Leave blank for
default.

OTHER

MH Mid-Run Power Harness Adapter


None is default.
Leave blank for none.

MOUNTING

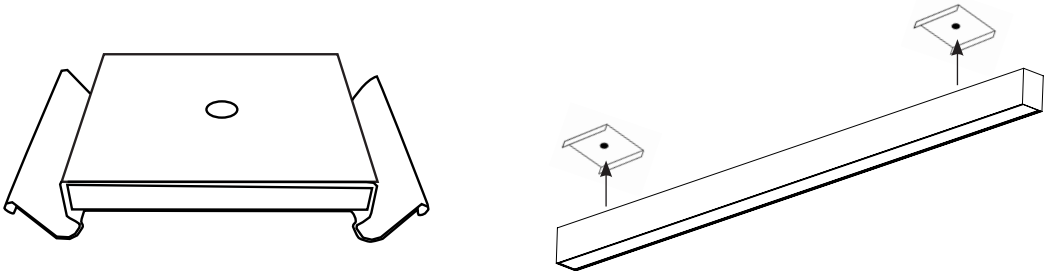

NUMBER OF BRACKETS INCLUDED:
2 ft. - 2 (Two)
4 ft. - 2 (Two)
8 ft. - 3 (Three)

DIMENSIONS (Standard)

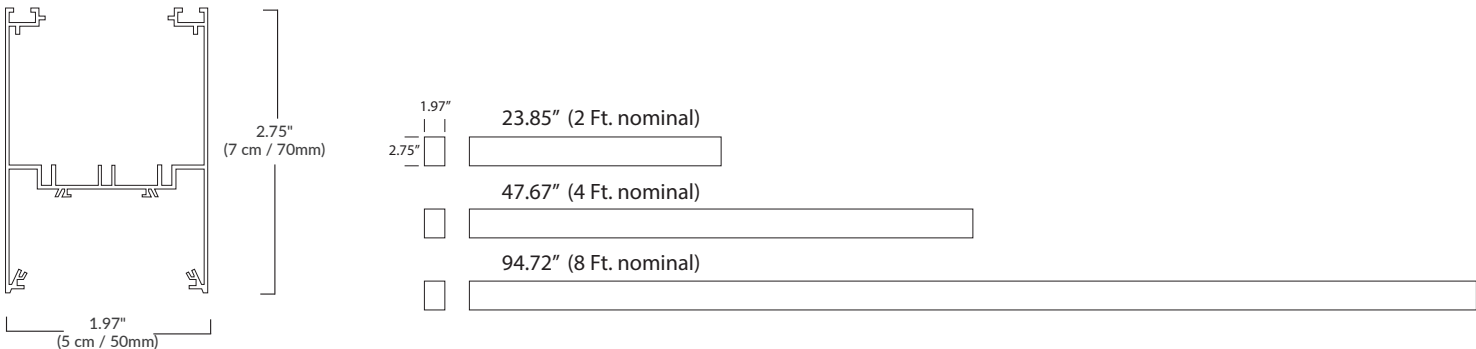

OUTPUT (Standard @ 3000K)

	MEDIUM	100 (100% DOWN) HIGH	VERY HIGH
PER FT.	909 LM 7.5 W	1192 LM 10 W	1430 LM 12.5 W
EFFICACY (LM/W)	121 LM/W	119 LM/W	114 LM/W
STD. LENGTHS 2 FT.	1812 LM 15 W	2385 LM 20 W	2871 LM 25 W
4 FT.	3635 LM 30 W	4959 LM 40 W	5921 LM 50 W
8 FT.	7270 LM 60 W	9534 LM 80 W	11440 LM 100 W
PHOTOMETRY			


NOTE: Photometry based on a [4-ft.] profile @ [30K] CCT.

LUMEN MULTIPLIER CHART


CCT	MULTIPLIER
30K	1.00
35K	1.061
40K	1.067

CONNECTOR ACCESSORIES (optional)


Internal Surfaced/Recessed - "CISR"

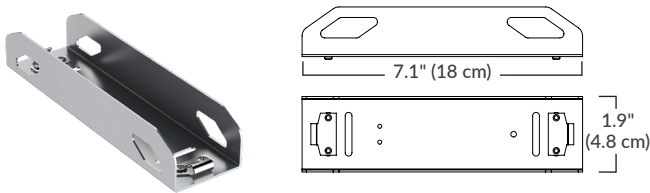


Internal Pendant/Wall - "CIPW"

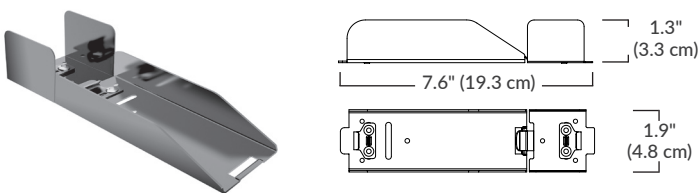


L-shape - "CL"

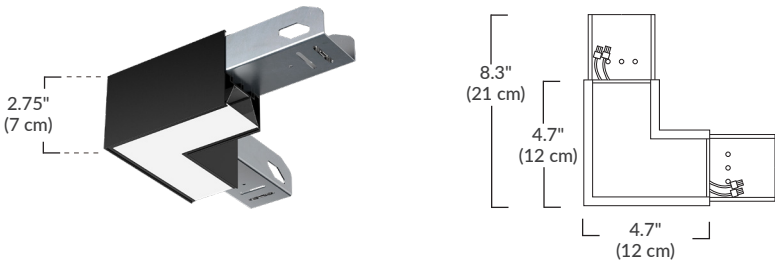

T-shape - "CT"

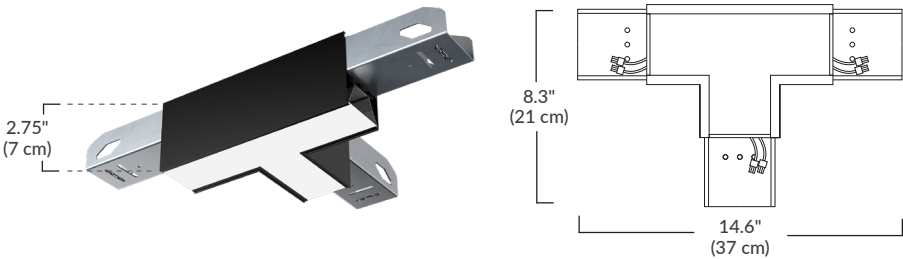

X-shape - "CX"

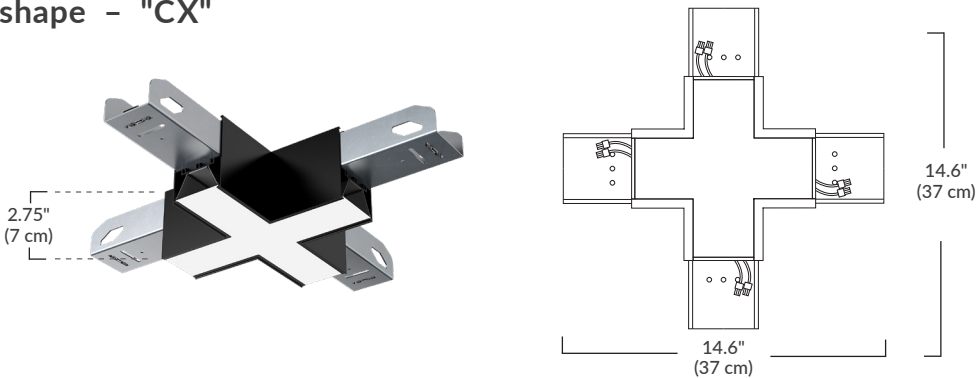


ORDERING GUIDE - ACCESSORIES

SERIES

BLS2


BLS2
Blackjack Linear
Slot

CONNECTOR TYPE



CISR - Internal (Surface/Recessed)
CIPW - Internal (Pendant/Wall)
CL - L-shape
CT - T-shape
CX - X shape

FINISH



Standard
BL Black
WH White
Special Order
BZ Bronze
SS Satin Silver
SG Satin Gold
Other
CS Customer Specification

MAX. CONNECTIONS:
2 ft. - 7 units
4 ft. - 7 units
8 ft. - 4 units

Example: BLS2 - CL - WH