



CAUTION

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

GENERAL

Read all instructions carefully for safe operation and installation.

All electrical connections must be in accordance with local and national electrical code (N.E.C.) standards.

Remove the fixture and mounting package from the box. Make sure no parts are missing by referencing the illustrations on these Installation Instructions. Please contact Blackjack Lighting at 847-941-0588 if any parts are missing or damaged. This product is suitable for DAMP locations.

PREPARATION

1. Remove the fixture and all the parts from the box. Fixture parts included: one rear housing with integrated LED light source and one acrylic diffuser.
2. To remove the canopy backplate(10) from the acrylic diffuser(12), loosen the two side thumbscrews(9) (as shown in Fig.2).
3. Select the proper CCT color temperature by adjusting the CCT switch(1) on the back of the canopy backplate(10) (as shown in Fig.1).

ELECTRICAL CONNECTIONS

4. Using the wire connectors(8), connect the white supply wire(1) to the white fixture wire(2); connect the black supply wire(3) to the black fixture wire(4); and connect the house ground wire(5) to the fixture ground wire(6).
5. Carefully tuck all the wires back into the junction box(7) (as shown in Fig.2).

MOUNTING

6. Place the canopy backplate(10) over the junction box(7). Carefully insert the body of the driver(13) into the junction box(7). Insert the mounting screws(11) through the slots on the canopy backplate(10). Then tighten them into the junction box(7).
7. Align the holes on the side of the canopy backplate(10) with the holes on the side of the acrylic diffuser(12). Then insert and tighten the two thumbscrews(9) to secure them together.

DIMMING

8. Fixture requires a 120V input current and can dim with a TRIAC Dimmer. Can be upgraded to 120-277V driver with universal dimming (TRIAC, ELV, 0 -10v dimmable).

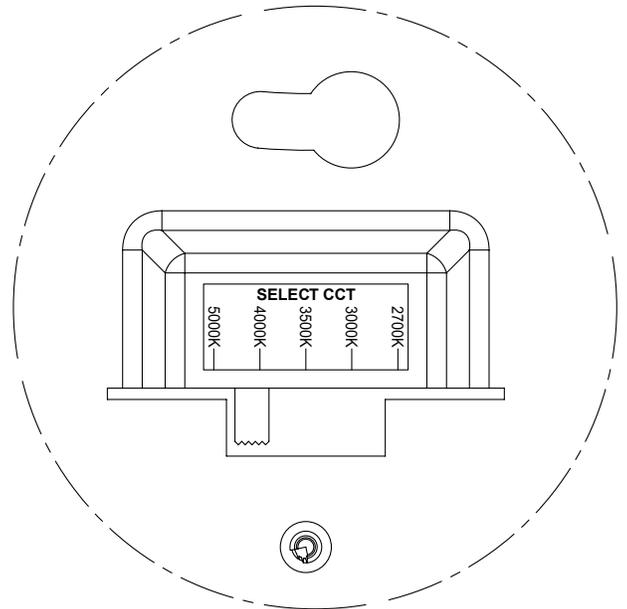


Figure 1

HARDWARE INCLUDED:




Wire Connector (#8)
Qty. Included: 3



Mounting Screw (#18)
Qty. Included: 2



Canopy Thumbscrew (#9)
Qty. Included: 4

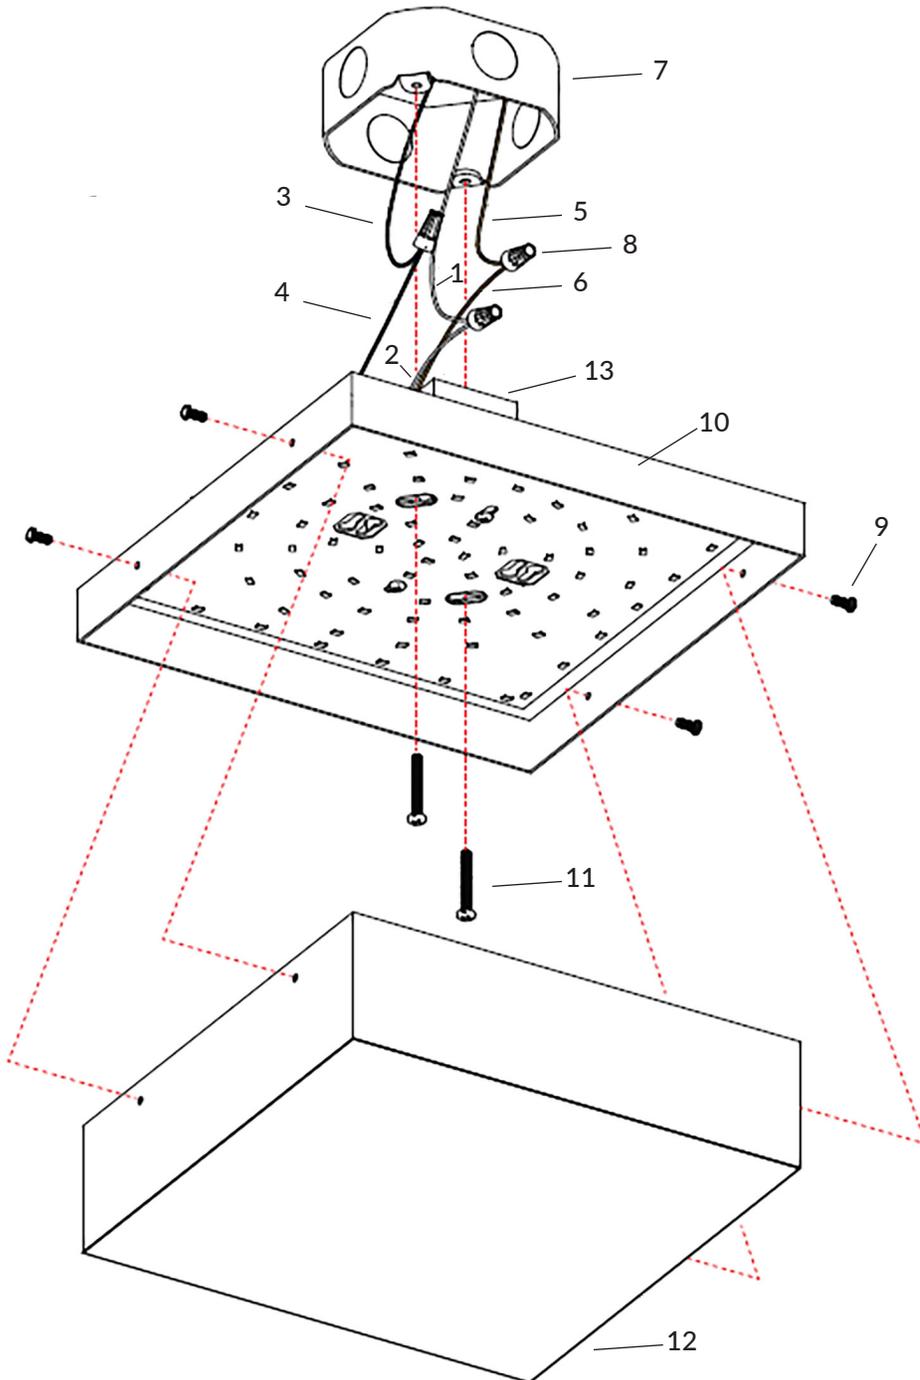

1. WHITE SUPPLY WIRE
2. WHITE FIXTURE WIRE
3. BLACK SUPPLY WIRE
4. BLACK FIXTURE WIRE
5. HOUSE GROUND WIRE
6. FIXTURE GROUND WIRE
7. JUNCTION BOX (by others)
8. WIRE CONNECTORS
9. THUMBSCREWS
10. CANOPY BACKPLATE
11. MOUNTING SCREWS
12. ACRYLIC DIFFUSER
13. DRIVER