

COLOR GEL PENDANT




SPECIFICATIONS

Finish	Matte Black, White, or Polished Chrome
LED Color Temperature	3000K (standard) 2700K, 3500K, or 4000K also available
Wattage	2 Watts / 86 Lumens or 3 Watts / 133 Lumens
Input Voltage	120-277V
Color Rendering Index	90CRI
Pendant Dimensions	2.5" Dia. x 1.13"H
Driver Location	Integral in canopy, remote, or above canopy (depending on canopy selected)
Cable Length	96" standard / 300" maximum
Minimum Pendant Drop	4"
Maximum Std. Pendant Drop	100"

CUSTOM OPTIONS

See page 2 for socket finish and mounting options.

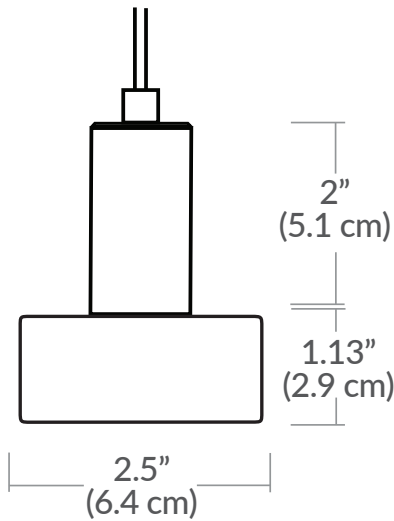


ORDERING GUIDE

← PRODUCT CODE							OPTIONS →	
CATEGORY	SERIES	DIFFUSER	SIZE	SOCKET COLOR	CCT	WATTAGE	MOUNTING	CABLE LENGTH
SP Small Pendant	CGL Color Gel	RD - Red GN - Green BL - Blue	03 3" Diameter (2.5" actual dia.)	Standard BL - Matte Black WH - White PC - Polished Chrome Special Order BZ - Bronze SG - Satin Gold SS - Satin Silver	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K (30K Standard)	2W 2 Watts / 86 Lm 3W 3 Watts / 133 Lm	SP2 - 2.5" Canopy SP5 - 5" Canopy MPC - Multi-Port Canopy JTA - JackTrack	Indicate Cable Length in Inches - leave blank for default 096 = 96" (default) 300 = 300" (max.)

Example Part Number: SP-CGL-GN-03-BL-30K-2W-MPC

Socket Color

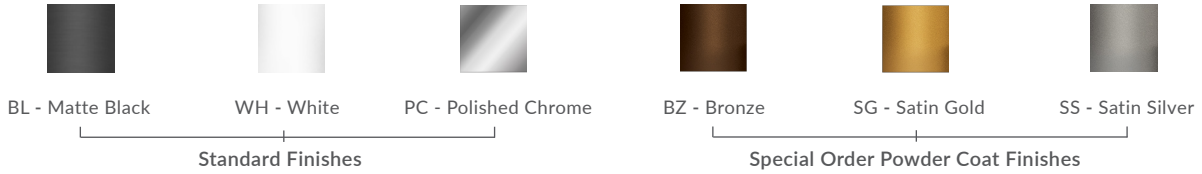


Wattage (Lumens measured at 3000K)

- 2W** = 2 Watts / 86 Lumens, recommended for Multi-Port applications (Multi-Port system and JackTrack adapter).
- 3W** = 3 Watts / 133 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).

Mounting





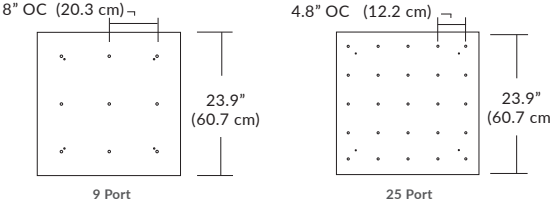

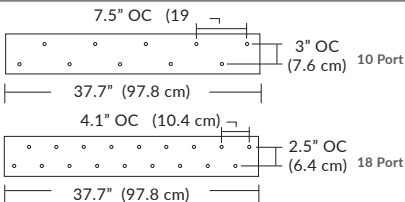

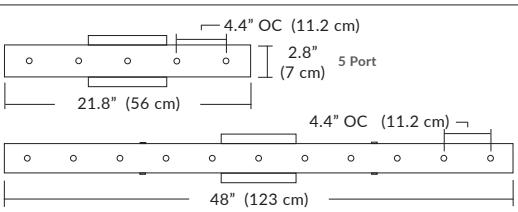

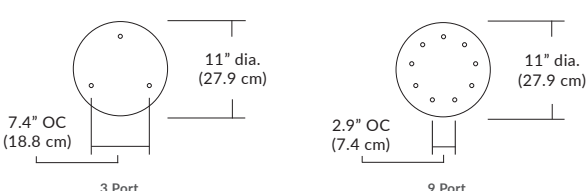

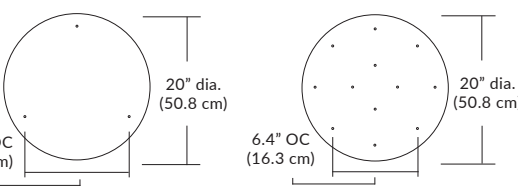

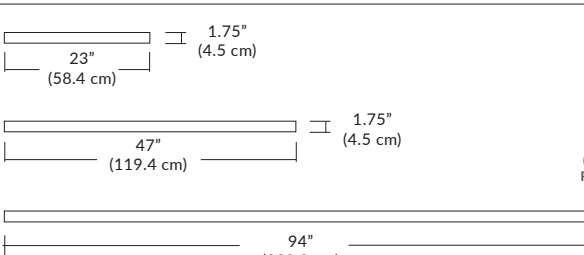

- SP5** = 5" round canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box
Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)
- SP2** = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)
Cable with modular connector (and optional wire harness) attaches to a remote driver
- MPC** = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately)
Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)
 MPC options include:
 - Quatro, Duo, and Solo Modular Systems
 - Multi-Port canopies
- JTA** = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately)
Cable is cut to length and inserted in JackTrack adapter

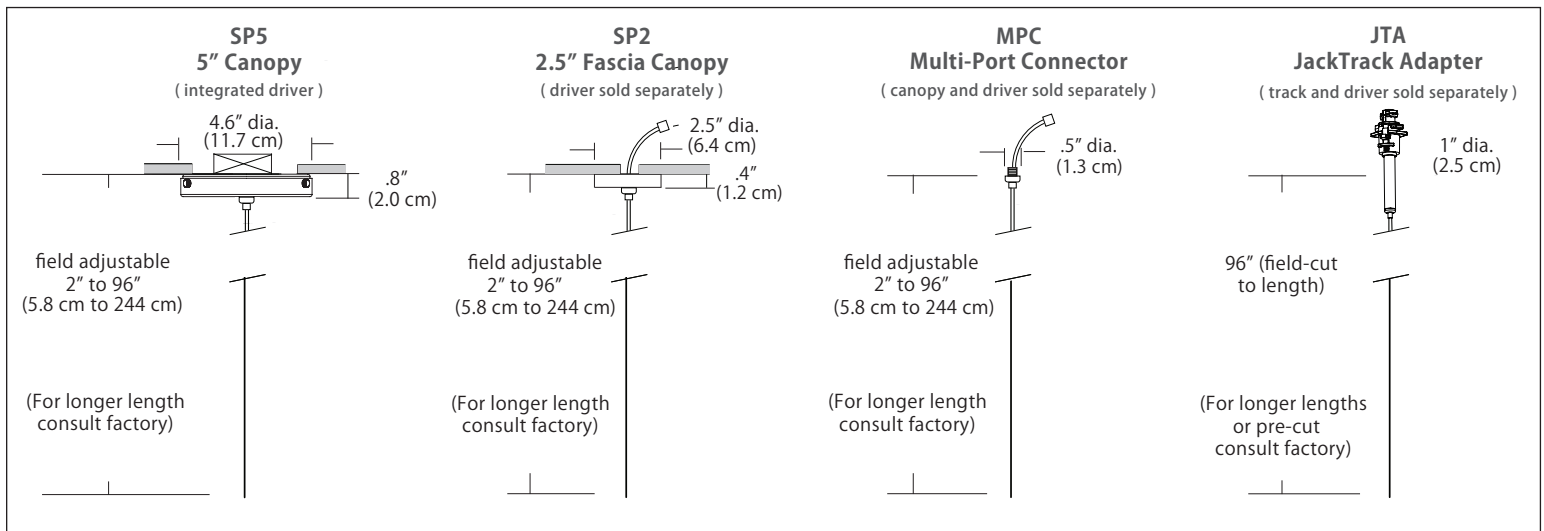

Cable Length

- 096** = 96" (Default Length).
- XXX** = Custom Length (300" = maximum length)
- For Custom Lengths, please indicate length in inches.

For more information on Quatro, Duo, or Solo Modular Systems, JackTrack, or Multi-Port Canopies, see blackjacklighting.com.

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. (12.7 cm)	 (Integrated Driver) .8" (2 cm)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. (6.4 cm)	 (Remote Driver required) .4" (1.3 cm)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# MQ-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-# MQ-2425-#	 8" OC (20.3 cm) 23.9" (60.7 cm) 9 Port 4.8" OC (12.2 cm) 23.9" (60.7 cm) 25 Port	 21.5" 54.6 cm 2.5" (6 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# MD-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-# MD-3818-#	 7.5" OC (19 cm) 37.7" (97.8 cm) 3" OC (7.6 cm) 10 Port 4.1" OC (10.4 cm) 37.7" (97.8 cm) 2.5" OC (6.4 cm) 18 Port	 4.7" 11.9 cm 2.5" (6 cm) 6" 15.2 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# MS-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-# MS-4811-#	 4.4" OC (11.2 cm) 21.8" (56 cm) 2.8" (7 cm) 5 Port 4.4" OC (11.2 cm) 48" (123 cm) 2.8" (7 cm) 11 Port	 2.8" (7 cm) 1.4" (4 cm) (Integrated or Remote Driver)	BL Matte Black WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 11" dia. (27.9 cm) 7.4" OC (18.8 cm) 3 Port 11" dia. (27.9 cm) 2.9" OC (7.4 cm) 9 Port	 10" dia. (25.4 cm) 2.1" (5.3 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 20" dia. (50.8 cm) 14.5" OC (36.8 cm) 3 Port 20" dia. (50.8 cm) 6.4" OC (16.3 cm) 12 Port	 18" dia. 45.7 cm 2.5" (6 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack J1-XXXX-XX-CH024 48" JackTrack J1-XXXX-XX-CH048 94" JackTrack J1-XXXX-XX-CH094	 23" (58.4 cm) 1.75" (4.5 cm) 47" (119.4 cm) 1.75" (4.5 cm) 94" (238.8 cm) 1.75" (4.5 cm)	 1.38" (3.5 cm) 1.75" (4.5 cm) (Integrated or Remote Driver)	BL Matte Black WH White


For more information on Quatro, Duo, or Solo Modular Systems, JackTrack, or Multi-Port Canopies, see blackjacklighting.com.

System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------


Quatro

4S (4' 2x2 / 9 Port)
MQ-2409-XX-4S-X-XXX

Square Configurations

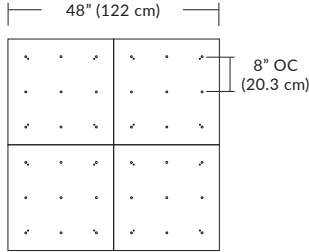


6S (6' 3x3 / 25 Port)
MQ-2425-XX-6S-X-XXX

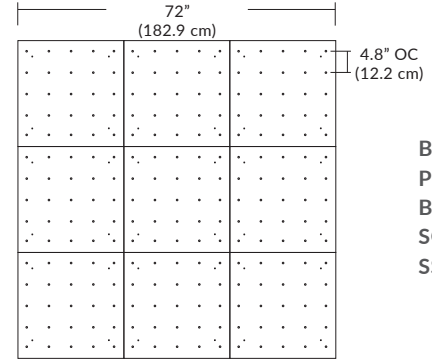


BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver

4L (4'x2' / 9 Port)
MQ-2425-XX-4L-X-XXX

Linear Configurations

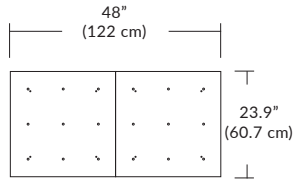

6L (6'x2' / 25 Port)
MQ-2425-XX-6L-X-XXX

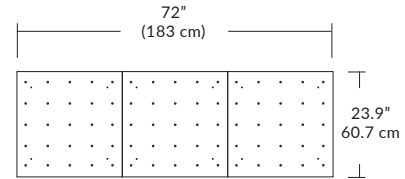


Additional configurations and options available. Contact factory for details.

Duo


6L (6'4"x6" / 10 Port)
MD-3810-XX-6L-X-XXX

Linear Configurations

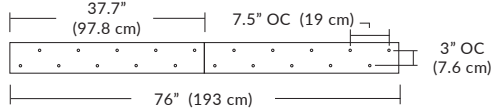

BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver


9L (9'6"x6" / 18 Port)
MD-3818-XX-9L-X-XXX

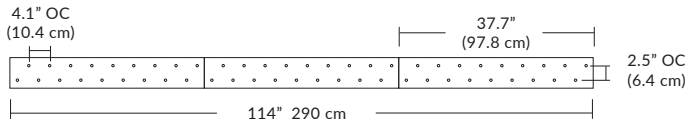


Additional configurations and options available. Contact factory for details.

Solo


Solo 48" Linear Configuration




Solo (L) Configuration

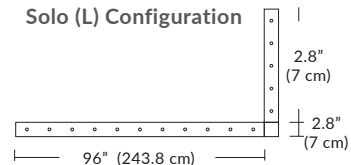

Solo 22" Grid Configuration

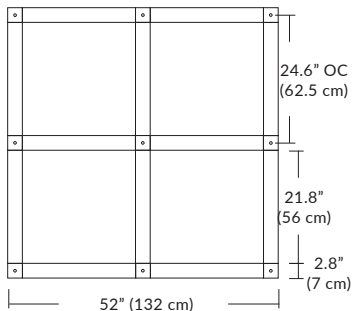

Solo 48" Grid Configuration

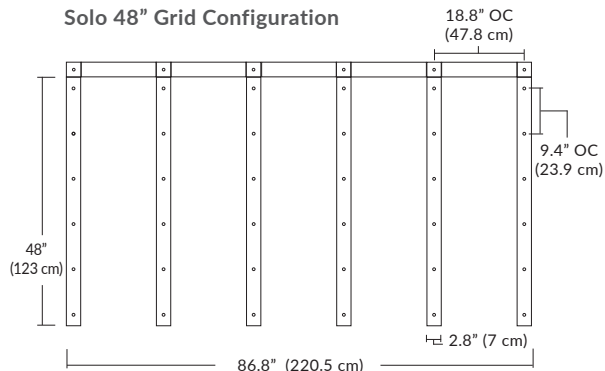

BL Matte Black
WH Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver

Additional configurations and options available. Contact factory for details.