

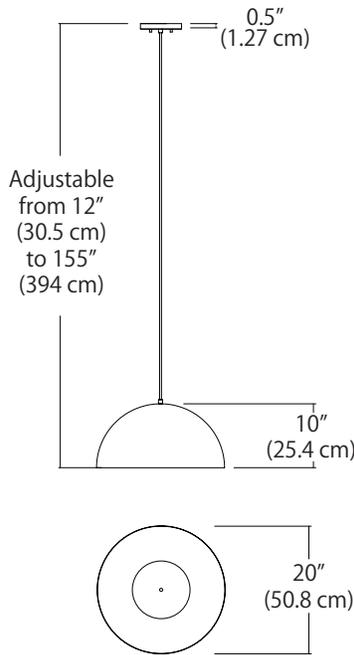
DOMOS 20" LED SUSPENDED PENDANT



SPECIFICATIONS

Finish	WG-White w/ Gold Interior or BG-Black w/Gold Interior
LED Color Temperature	Available in 27K, 30K, 35K, and 40K (30K Standard)
Wattage	12 Watts
Lumens	679 Lm (Gold Interior); 800 Lm (White Interior)
Dimming	Universal (TRIAC, ELV, 0-10V)
Color Rendering Index	90CRI
Input Voltage	120VAC - 50/60Hz
Cable Length	144"

- Features integrated light kit with glass diffuser
- Universal voltage and universal dimming
- Damp location rated



BG - Black w/Gold Interior



WG - White w/Gold Interior



ORDERING GUIDE

CATEGORY

SP

SP
Small Pendant

SERIES

DOM

DOM
Domos Pendant

DIFFUSER

FR

FR
Frosted diffuser
w/integrated
light kit

SIZE

20

20
20" Diameter

FINISH

BG
Black w/Gold Interior
WG
White w/Gold Interior

CCT

12W
27K - 2700K
30K - 3000K
35K - 3500K
40K - 4000K
(30K Standard)

WATTAGE

12W
12W
679 Lm
Gold Interior
800 Lm
White Interior

← PRODUCT CODE

MOUNTING

SP2 - 2.5" Canopy
SP5 - 5" Canopy
MPC - Multi-Port
Canopy
JTA - JackTrack

OPTIONS →

CABLE LENGTH

144
144" cable length
Change length for
custom cable length
in inches
(144" Standard)

Example Part Number: SP-DOM-FR-20-WG-30K-12W-SP5

Finish



BG = Black with Gold Interior



WG = White with Gold Interior

Wattage (Lumens measured at 3000K)

12W = 12 Watts
 Gold Interior = 679 Lumens
 White Interior = 800 Lumens

Mounting

SP5 = 5" round canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box
Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)

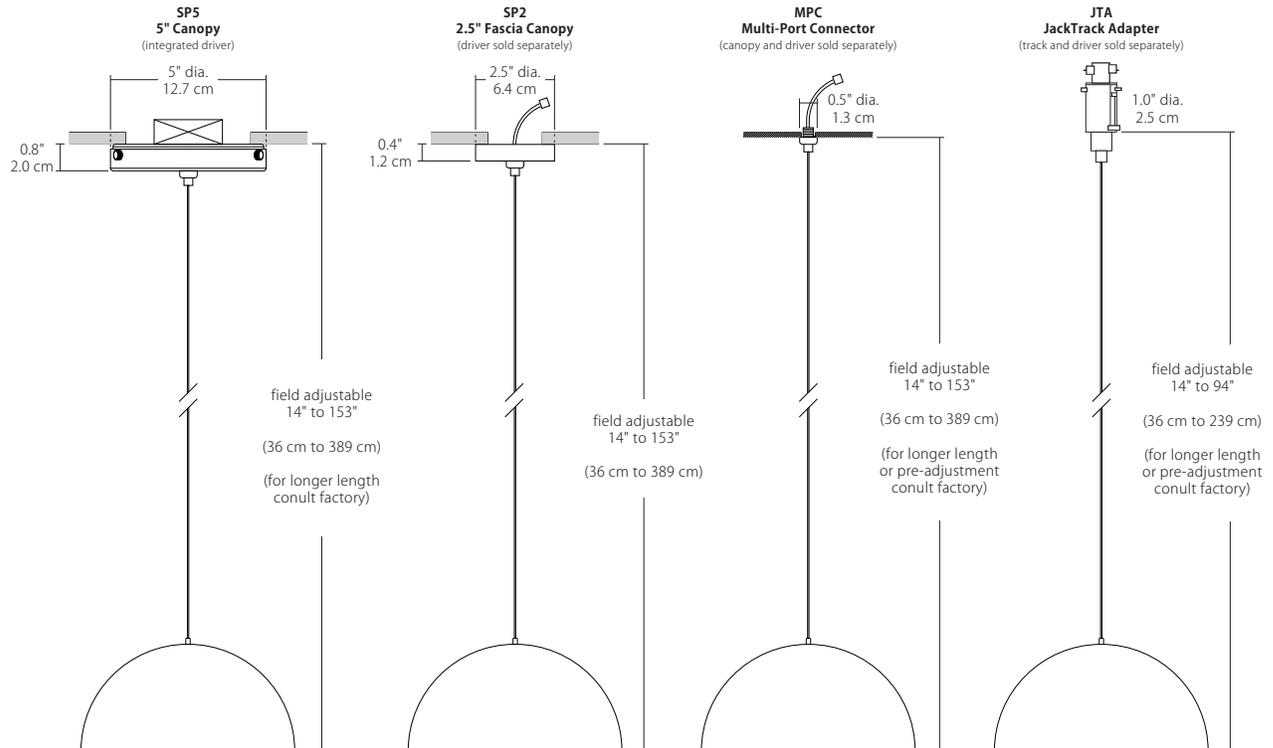
SP2 = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)
Cable with modular connector (and optional wire harness) attaches to a remote driver

MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately)
Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)

















MPC options include:

- Quatro, Duo, and Solo Modular Systems
- Multi-Port canopies

JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately)
Cable is cut to length and inserted in JackTrack adapter



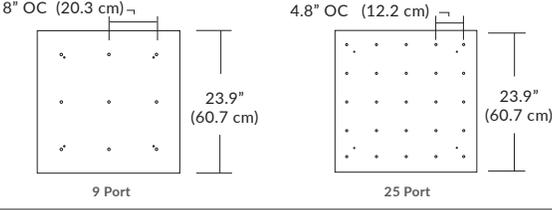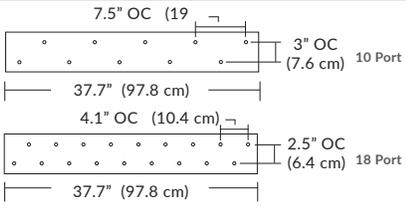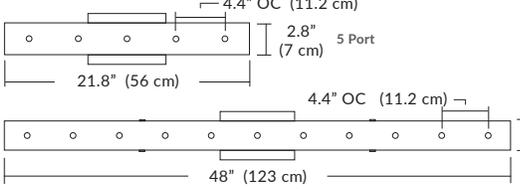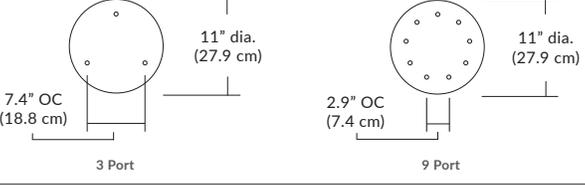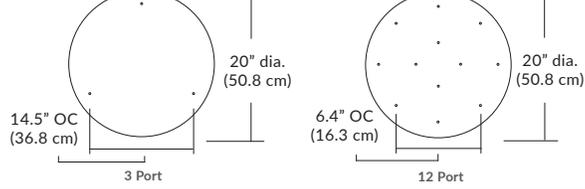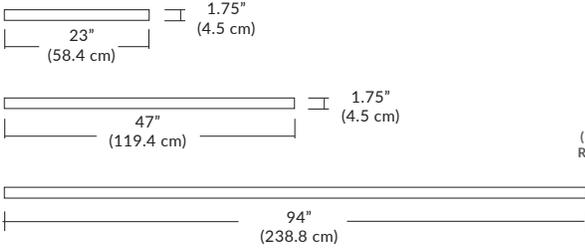For more information on Quatro, Duo, or Solo Modular Systems, JackTrack, or Multi-Port Canopies, see blackjacklighting.com.

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. (12.7 cm)	 (Integrated Driver) .8" (2 cm)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. (6.4 cm)	 (Remote Driver required) .4" (1.3 cm)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# MQ-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-# MQ-2425-#	 8" OC (20.3 cm) 9 Port 4.8" OC (12.2 cm) 25 Port 23.9" (60.7 cm)	 21.5" 54.6 cm 2.5" (6 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# MD-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-# MD-3818-#	 7.5" OC (19 cm) 10 Port 3" OC (7.6 cm) 37.7" (97.8 cm) 4.1" OC (10.4 cm) 18 Port 2.5" OC (6.4 cm) 37.7" (97.8 cm)	 4.7" 11.9 cm 2.5" (6 cm) 6" 15.2 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# MS-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-# MS-4811-#	 4.4" OC (11.2 cm) 5 Port 2.8" (7 cm) 21.8" (56 cm) 4.4" OC (11.2 cm) 11 Port 2.8" (7 cm) 48" (123 cm)	 2.8" (7 cm) 1.4" (4 cm) (Integrated or Remote Driver) 2.8" 11 Port (7 cm)	BL Matte Black WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 11" dia. (27.9 cm) 7.4" OC (18.8 cm) 3 Port 2.9" OC (7.4 cm) 9 Port	 10" dia. (25.4 cm) 2.1" (5.3 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 20" dia. (50.8 cm) 14.5" OC (36.8 cm) 3 Port 6.4" OC (16.3 cm) 12 Port	 18" dia. 45.7 cm 2.5" (6 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack J1-XXXX-XX-CH024 48" JackTrack J1-XXXX-XX-CH048 94" JackTrack J1-XXXX-XX-CH094	 1.75" (4.5 cm) 23" (58.4 cm) 1.75" (4.5 cm) 47" (119.4 cm) 1.75" (4.5 cm) 94" (238.8 cm)	 1.38" (3.5 cm) 1.75" (4.5 cm) (Integrated or Remote Driver)	BL Matte Black WH White


For more information on Quatro, Duo, or Solo Modular Systems, JackTrack, or Multi-Port Canopies, see blackjacklighting.com.

System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------


Quatro

4S (4' 2x2' / 9 Port)
MQ-2409-XX-4S-X-XXX

Square Configurations



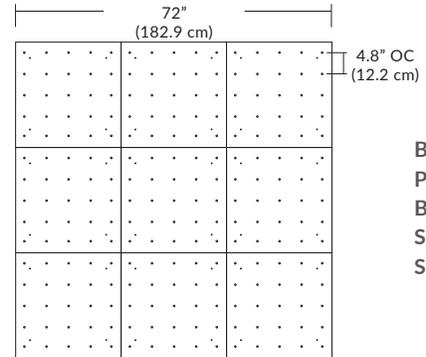
6S (6' 3x3' / 25 Port)
MQ-2425-XX-6S-X-XXX




BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver

4L (4'x2' / 9 Port)
MQ-2425-XX-4L-X-XXX

Linear Configurations



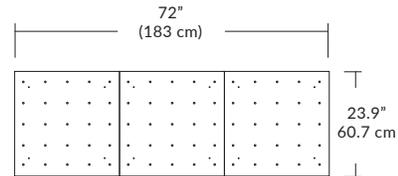
6L (6'x2' / 25 Port)
MQ-2425-XX-6L-X-XXX



Duo


6L (6'4"x6" / 10 Port)
MD-3810-XX-6L-X-XXX

Linear Configurations




BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver

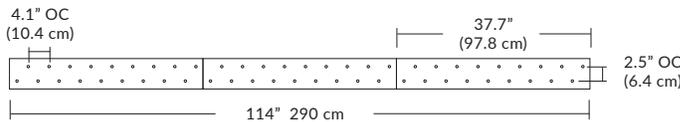9L (9'6"x6" / 18 Port)
MD-3818-XX-9L-X-XXX




Solo


Solo 48" Linear Configuration




Solo (L) Configuration

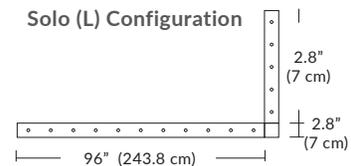

Solo 22" Grid Configuration



Solo 48" Grid Configuration

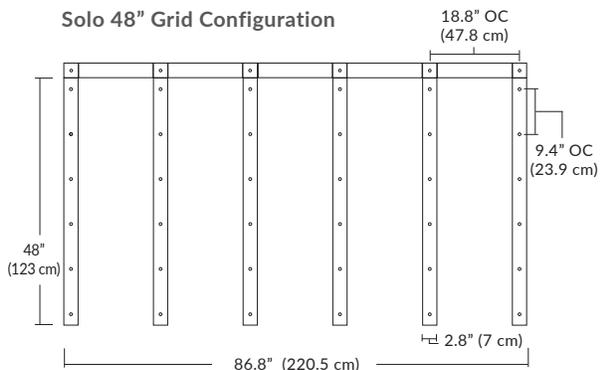

BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver