


DUO MODULAR SYSTEM

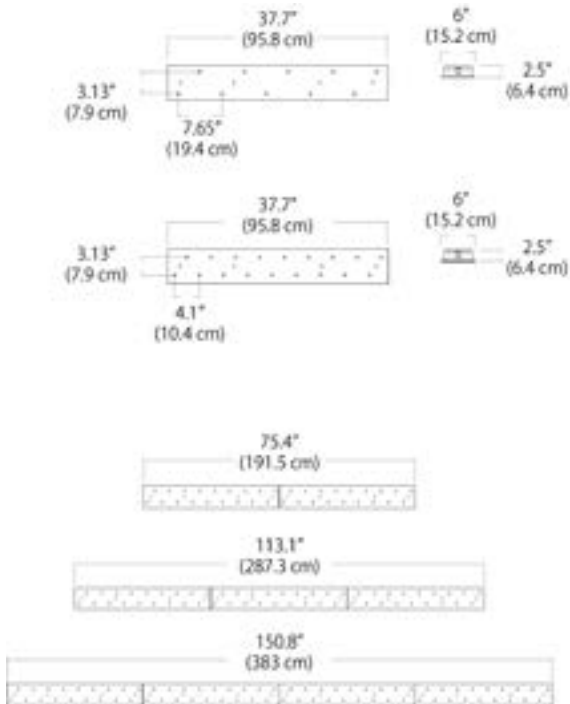

SPECIFICATIONS

Standard Finishes	Matte Black (BL), White (WH), or Polished Chrome (PC)
Custom Finishes	Bronze (BZ), Satin Gold (SG), or Satin Silver (SS)
Input Voltage	120-277VAC - Low Voltage 24V canopy system
CCT Options	2700K, 3000K, 3500K, or 4000K
Wattage	Available with 20W, 40W, 60W, or 96W driver options
Dimming	Universal (TRIAC / ELV / 0-10V)

- Canopies link together and can be ordered with almost any pendant and configuration
- Pendants ship pre-assembled to canopy, with cable lengths pre-set to a selected design pattern
- Fabricated steel construction
- Powder coated paint finishes
- Driver located in canopy housing
- Damp location rated



6L - 18 Port
with 3" Frosted Acrylic Globes in Random Pattern



ORDERING GUIDE

		PRODUCT CODE				OPTIONS		
SYSTEM	CANOPY	FINISH	PENDANT	CONFIGURATION	PATTERN	COLOR TEMPERATURE	CABLE LENGTH	POWER SUPPLY
MD								
MD Duo Modular System	3810 38" - 10-Port 3818 38" - 18-Port 38CS 38" - Custom Port	Standard BL - Matte Black WH - White PC - Polished Chrome Special Order BZ - Bronze SG - Satin Gold SS - Satin Silver	See pages 3 and 4 for pendant options	3L 3'2" x 6" Linear (1x1, 1 Module) 6L 6'4" x 6" Linear (1x2, 2 Modules) 9L 9'5" x 6" Linear (1x3, 3 Modules) 12L 12'7" x 6" Linear (1x4, 4 Modules)	C - Curved L - Level N - Pinched R - Random S - Stepped U - Surface Y - Customer Set Z - Customer Specification	27K 2700K 30K 3000K 35K 3500K 40K 4000K	Indicate Cable Length in Inches - leave blank for default 096 = 96" (default) 300 = 300" (max.)	U - Universal Integral (standard) (Leave blank for standard option) R - Remote

Example Part Number: MD - 3810 - BL - GLSFR - 6L - L - 30K - 096 - U

3L - 3'2" x 6" Linear (1x1, 1 Module)



One 10-Port Module with Clear Acrylic 3"
Globe Pendants in Level Pattern
MD-3810-BL-GLSCL-L

6L - 6'4" x 6" Linear (1x2, 2 Modules)



Two 18-Port Modules with Tall Clear
Pendants in Level Pattern
MD-3818-BL-LGDTTC-6L-L



Two 10-Port Modules with 8" Clear Glass
Spheres in Random Pattern
MD-3810-BL-GLSCL-6L-R

9L - 9'6" x 6" Linear (1x3, 3 Modules)



Three 18-Port Modules with Short Frosted
Pendants in Random Pattern
MD-3818-BL-LGDSF-9L-R



Three 10-Port Modules with Short Frosted Pendants
in Curved Pattern
MD-3810-BL-LGDSF-9L-E

12L - 12'8" x 6" Linear (1x4, 4 Modules)



Four 18-Port Modules with Short Frosted Pendants in
Random Pattern
MD-3818-BL-GLSCL-12L-R











Four 10-Port Modules with Short Frosted Pendants
in Level Pattern
MD-3810-BL-LGDSF-12L-L

BLACKJACK® LIGHTING

Pendants available separately. For full specifications and ordering information, see <http://blackjacklighting.com>


LIGHT GUIDE - 2W / 86 LM




3" ACRYLIC GLOBE - 2W / 86 LM



3" GLASS GLOBE - 2W / 147 LM







5" GLASS GLOBE - 3W / 238 LM




5" ACRYLIC GLOBE - 5W / 368 LM




NOVO TALL - 5W / 368 LM

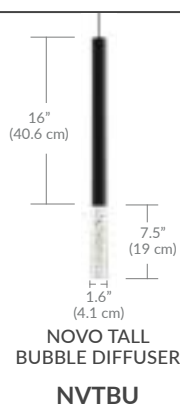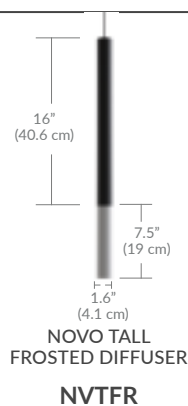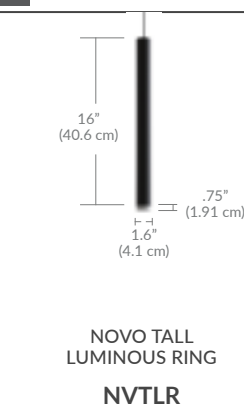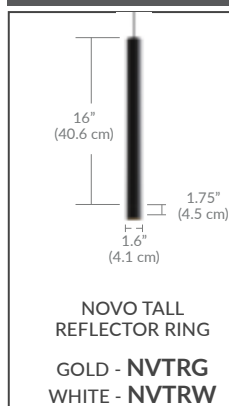



TALL CONE - 3W / 204 LM

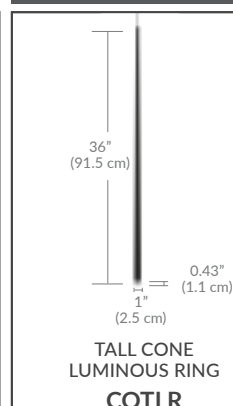

SHORT CONE - 5W / 397 LM


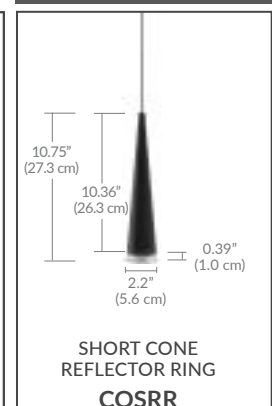


NOVO SHORT - 5W / 368 LM

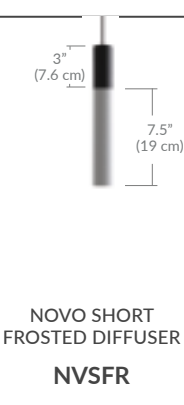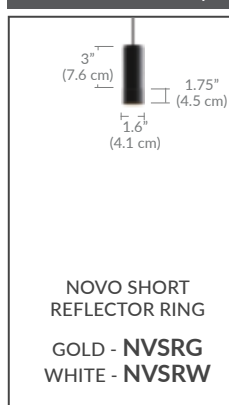

24" & 36" NOVO - 5W / 368 LM

* (Can be used with any Novo Tall or Novo Short diffuser)

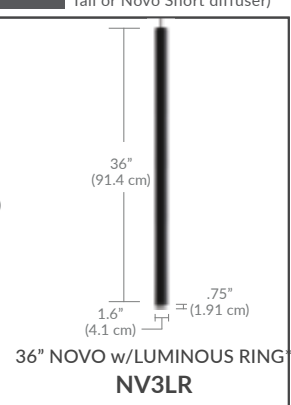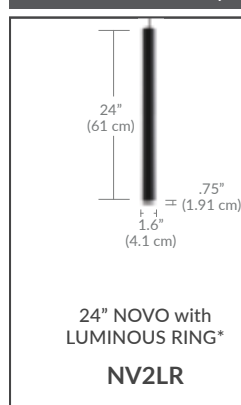

BLACKJACK® LIGHTING

Pendants available separately. For full specifications and ordering information, see <http://blackjacklighting.com>

8" GLASS SPHERE - 2W / 86 LM



12" GLASS SPHERE - 5W / 368 LM



5" VELO - 2W / 86 LM



4" BULLET - 2W / 86 LM



8" BULLET - 5W / 368 LM



3" COLOR GEL - 2W / 86 LM



10" PILLBOX - 12W / 680 LM




16" DOMOS - 12W / 680 LM




Fixture Wiring Example (6S Configuration/ Integral Driver)

For custom configuration contact Blackjack Lighting.
Illustrations are for reference only.

Bottom view with front overs removed

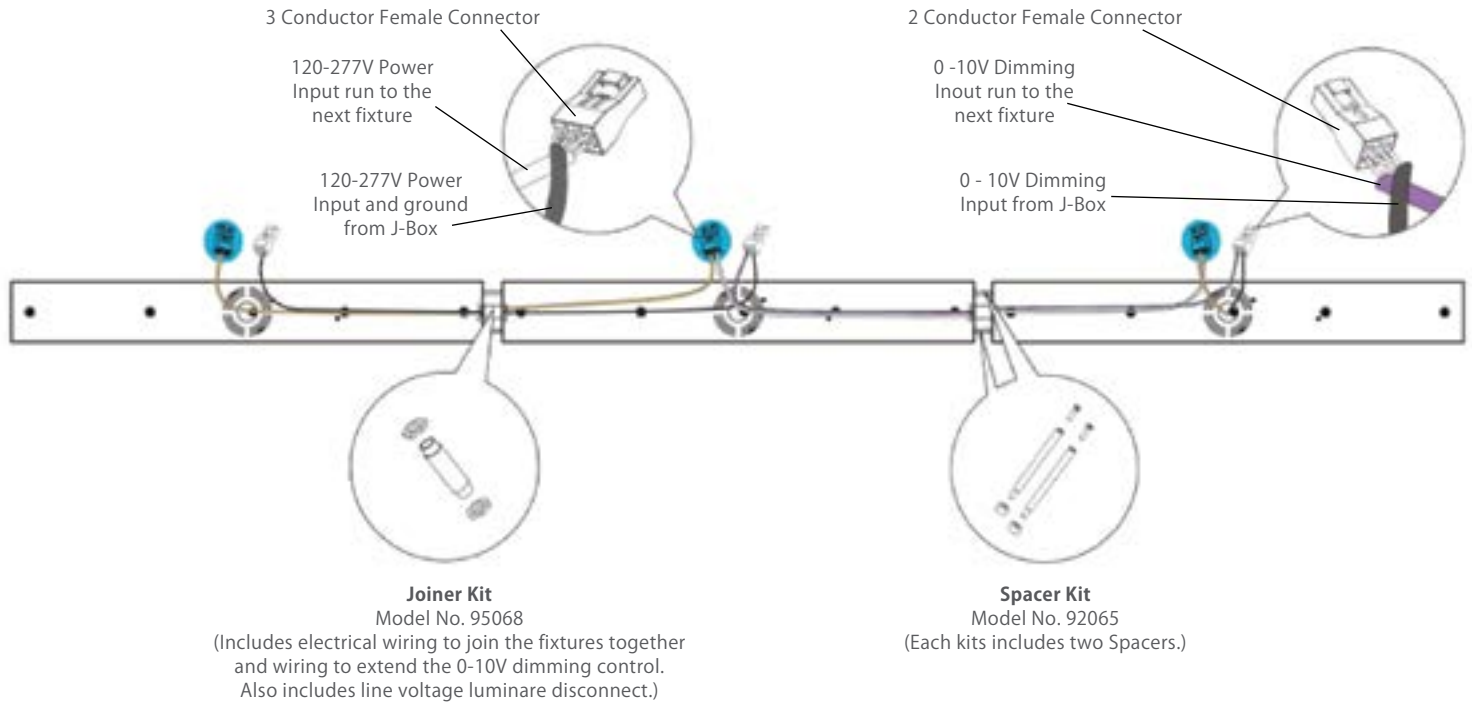


Section Through Fixture (before final attachment)

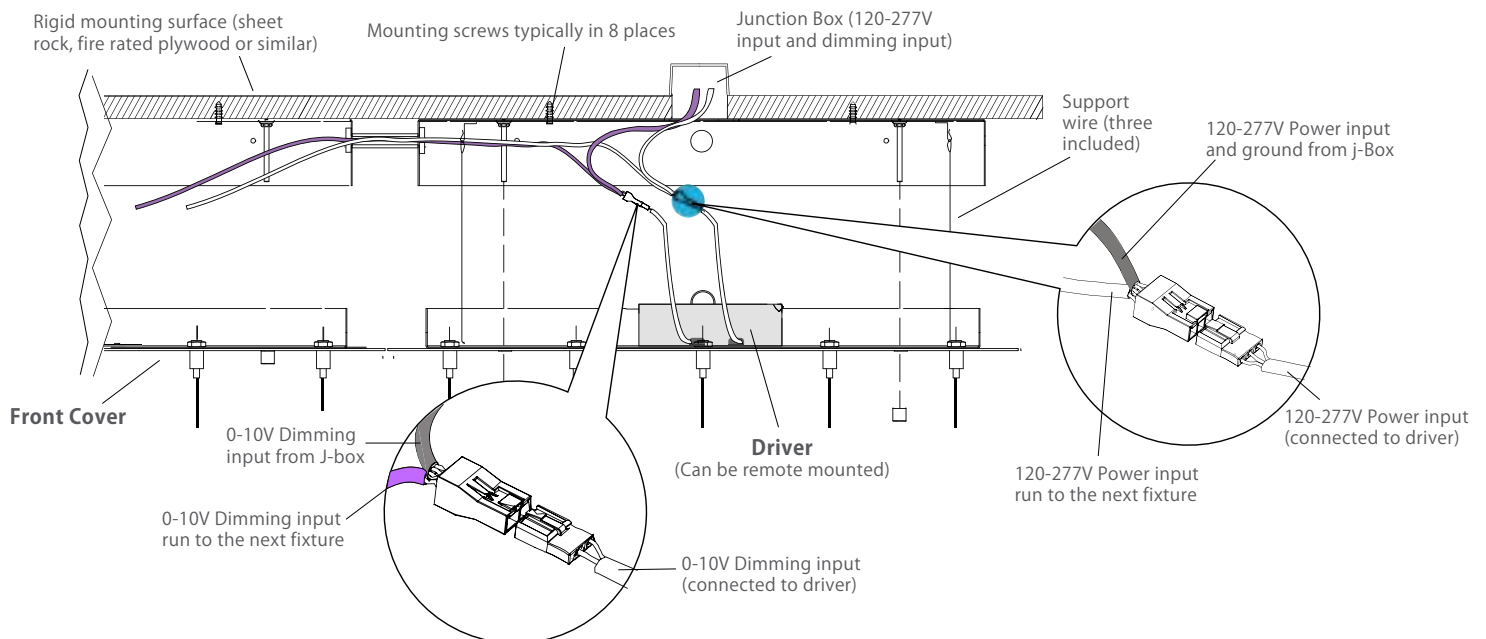


Fixture Wiring Example (6S Configuration/ Remote Driver)

For custom configuration contact Blackjack Lighting.
Illustrations are for reference only.

Bottom view with front covers removed

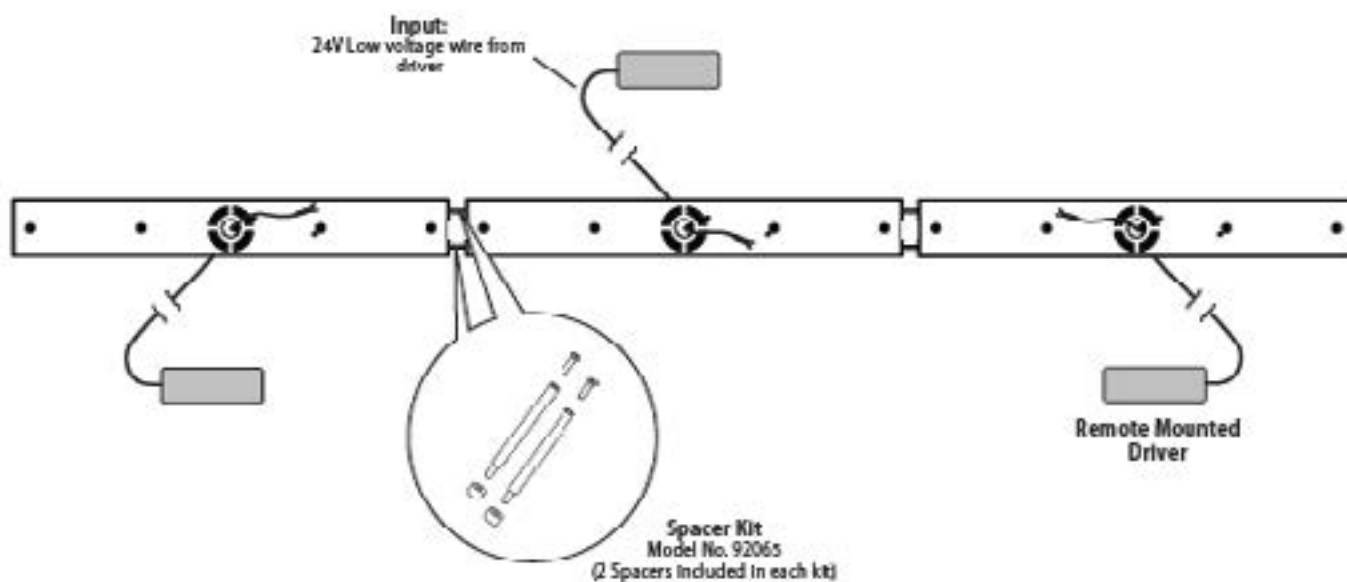

Section Through Fixture (before final attachment)

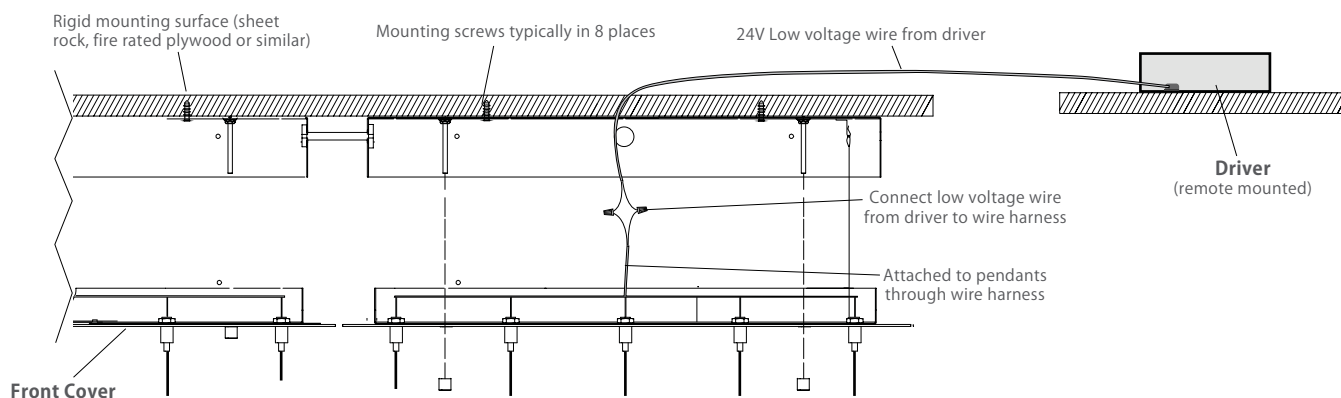

For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjacklighting.com.

Universal Drivers




Universal dimmable (TRIAC, ELV or 0-10V), Flicker-free dimming 100% to 2%, auto reset, short circuit, overload and thermal protection.
Input Volts: 120-277V. Output Volts: 24V.

	SP2	SP5	Round	Quatro	Duo	Solo	JackTrack
Description	Round 2.5" Fascia Canopy	Round 5" Canopy	Round 10" Round 20" Canopies	Square 24" Canopy	Rectangular 38" Canopy	Rectangular 22" Canopy 48" Canopy	Linear Track
System #				MQ-XXX	MD-XXX	MS-XXX	J1-XXX
Canopy #	XXX-SP2	XXX-SP5	C-MPR-XXX	C-MPS-XXX	C-MPT-XXX	C-MPL-XXX	


SKU	Watts						
INTEGRAL MOUNTED (Inside Fixture)							
PS-94ST-15W-27U-IN	15W	X					
PS-94ST-20W-27U-IN	20W		X	X	X		
PS-94ST-40W-27U-IN	40W		X	X	X		
PS-94ST-60W-27U-IN	60W		X	X	X		
PS-94ST-96W-27U-IN	96W		X	X	X		
CANOPY MOUNTED (Inside Mounting Canopy)							
PS-94ST-20W-27U-IC	20W					X	
PS-94ST-40W-27U-IC	40W					X	X
PS-94ST-40W-27U-IC	40W						X
PS-94SR-60W-27U-IC	60W					X	X
PS-94SR-96W-27U-IC	96W					X	X
PS-94ST-300-27U-IC	300W						X
REMOTE MOUNTED (Inside Remote Housing)							
PS-94ST-40W-27U-RE	40W	X	X	X	X	X	X
PS-94ST-60W-27U-RE	60W	X	X	X	X	X	X
PS-94ST-96W-27U-RE	96W	X	X	X	X	X	X
PS-94ST-300-27U-RE	300W						X

Remote Canopy Mounting Options

For additional information on mounting options and canopy sizes, please refer to other pages in this specification sheet.

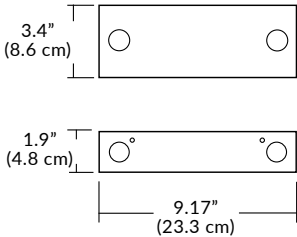

Remote Mounted Housing
(40W, 60W, or 96W Driver)

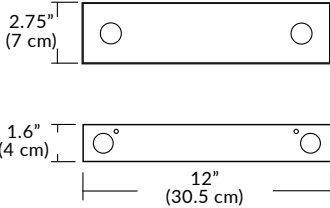

Remote Mounted Housing
(300W Driver)