

PROJECT:		SPECIFIER:	
SKU:			
QUANTITY:		DATE:	

5" WHITE GLASS GLOBE SUSPENDED SMALL PENDANT

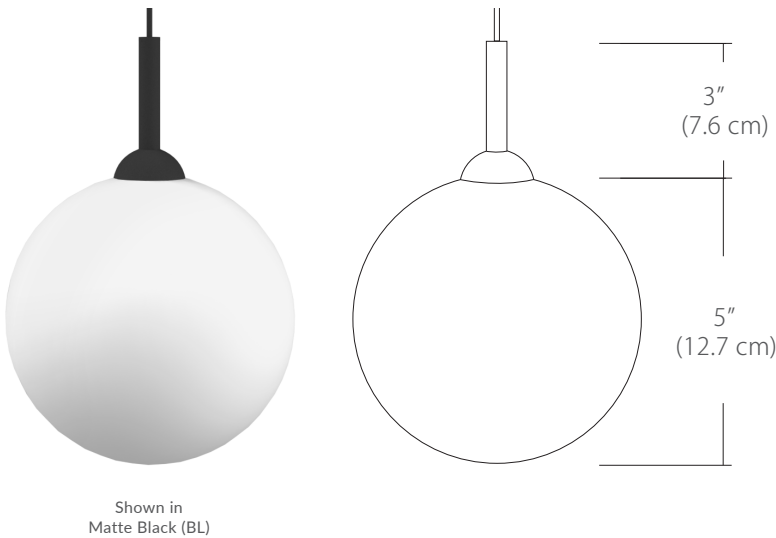


SPECIFICATIONS

Finish	Matte Black, White, or Polished Chrome
LED Color Temperature	3000K (standard) 2700K, 3500K, or 4000K also available
Wattage	2 Watts / 146 Lumens 3 Watts / 234 Lumens
Driver Location	Integral in canopy, remote, or above canopy (depending on canopy selected)
Dimming	Universal (TRIAC, ELV, 0-10V)
Color Rendering Index	90CRI
Input Voltage	120VAC - 50/60Hz
Cable Length	8' (for longer lengths, consult factory)

CUSTOM OPTIONS

See page 2 for socket finish and cord color options.




ORDERING GUIDE

PRODUCT CODE								OPTIONS	
CATEGORY	SERIES	DIFFUSER	SIZE	SOCKET COLOR	CCT	WATTAGE	MOUNTING	CABLE LENGTH	
SP	GGL	WH	05						
SP Small Pendant	GGL Large White Glass Globe	WH White	05 5" Diameter	Standard BL - Matte Black WH - White PC - Polished Chrome Special Order BZ - Bronze SG - Satin Gold SS - Satin Silver	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K (30K Standard)	2W 2 Watts / 146 Lm 3W 3 Watts / 234 Lm	SP2 - 2.5" Canopy SP5 - 5" Canopy MPC - Multi-Port Canopy JTA - JackTrack	Indicate Cable Length in Inches - leave blank for default 096 = 96" (default) 300 = 300" (max.)	

Example Part Number: SP-GGL-WH-05-BL-30K-3W-SP5-96-BL

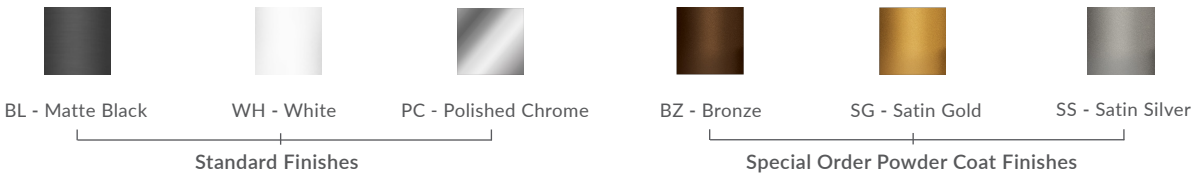Socket Color




Wattage (Lumens measured at 3000K)

- 2W** = 2 Watts / 146 Lumens, **recommended for Multi-Port applications** (Multi-Port system and JackTrack adapter).
- 3W** = 3 Watts / 234 Lumens, **recommended for single pendant applications** (5" Canopy and 2.5" Fascia Canopy).

Mounting






















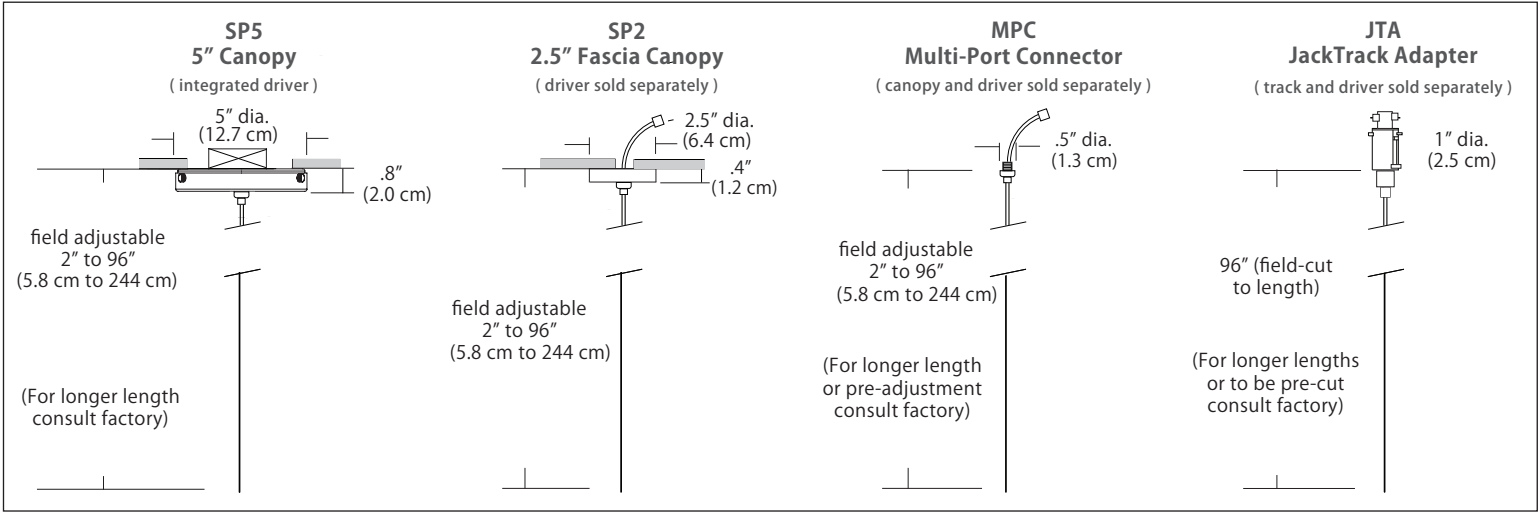
- SP5** = 5" round canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box
Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)
- SP2** = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)
Cable with modular connector (and optional wire harness) attaches to a remote driver
- MPC** = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately)
Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)
MPC options include:
Solo Systems, Duo Systems, Quatro Systems, and JackTrack Systems
MPC, MPR, MS, MQ, MD canopies
- JTA** = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately)
Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter



Cable Length

- 096** = 96" (Default Length).
- XXX** = Custom Length (300" = maximum length)
For Custom Lengths, please indicate length in inches.

For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjack.com.

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. (12.7 cm)	 .8" (2 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. (6.4 cm)	 .4" (1.3 cm) (Remote Driver required)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPS MQ	24" Multi-Port Square - 9 Port C-MPS-2409-# MQ-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-# MQ-2425-#	 8" OC (20.3 cm) 23.9" (60.7 cm) 9 Port  4.8" OC (12.2 cm) 23.9" (60.7 cm) 25 Port	 21.5" (54.6 cm) 2.5" (6 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPT MD	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# MD-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-# MD-3818-#	 7.5" OC (19 cm) 3" OC (7.6 cm) 10 Port 37.7" (97.8 cm)  4.1" OC (10.4 cm) 2.5" OC (6.4 cm) 18 Port 37.7" (97.8 cm)	 4.7" (11.9 cm) 2.5" (6 cm) 6" (15.2 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPL	22" Multi-Port Linear - 5 Port C-MPL-2205-# MS-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-# MS-4811-#	 4.4" OC (11.2 cm) 2.8" (7 cm) 5 Port 21.8" (56 cm)  4.4" OC (11.2 cm) 2.8" (7 cm) 11 Port 48" (123 cm)	 2.8" (7 cm) 1.4" (4 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPR	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 11" dia. (27.9 cm) 7.4" OC (18.8 cm) 3 Port  11" dia. (27.9 cm) 2.9" OC (7.4 cm) 9 Port	 10" dia. (25.4 cm) 2.1" (5.3 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC MPR	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 20" dia. (50.8 cm) 14.5" OC (36.8 cm) 3 Port  20" dia. (50.8 cm) 6.4" OC (16.3 cm) 12 Port	 18" dia. 45.7 cm 2.5" (6 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack 48" JackTrack 94" JackTrack	 1.75" (4.5 cm) 23" (58.4 cm)  1.75" (4.5 cm) 47" (119.4 cm)  1.75" (4.5 cm) 94" (238.8 cm)	 1.38" (3.5 cm) 1.75" (4.5 cm) (Integrated or Remote Driver)	BL Matte Black WH White


For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjack.com.

System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------


Quattro

4S (4' 2x2 / 9 Port)
MQ-2409-XX-4S-X-XXK

Square Configurations




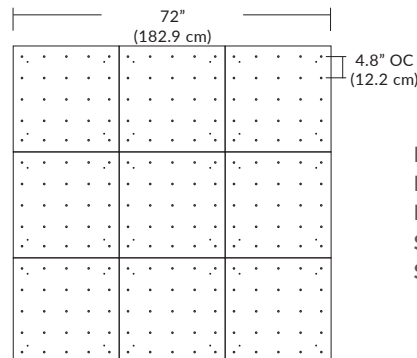6S (6' 3x3 / 25 Port)
MO-2425-XX-6S-X-XXK




BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver

Linear Configurations



4L (4'x2' / 9 Port)
MQ-2425-XX-4L-X-XXK

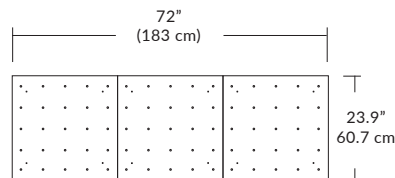
6L (6'x2' / 25 Port)
MQ-2425-XX-6L-X-XXK




Duo

6L (6'4"x6" / 10 Port)
MD-3810-XX-6L-X-XXK

Linear Configurations



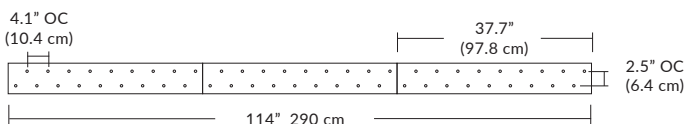
9L (9'6"x6"/ 18 Port)
MD-3818-XX-9L-X-XXK




BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver

Solo


Solo 48" Linear Configuration




Solo (L) Configuration



Solo 22" Grid Configuration

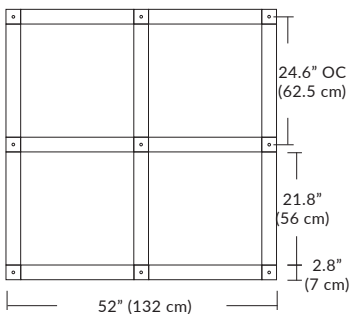

Solo 48" Grid Configuration

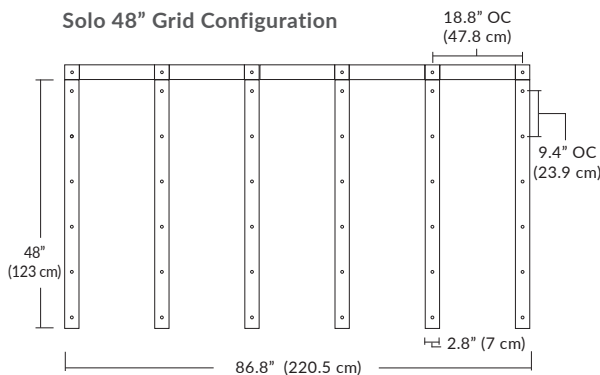

BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver