BLACKJACK® LIGHTING

GRADIENT 1" LIGHT GUIDE SMALL PENDANT
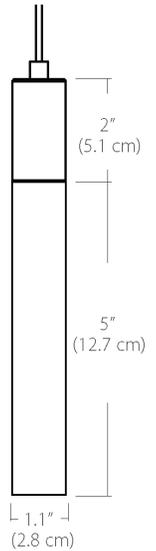
SPECIFICATIONS

Finish	Matte Black, White, or Polished Chrome
LED Color Temperature	3000K (standard) *2700K, 3500K, or 4000K also available*
Wattage	2 Watts / 86 Lumens 3 Watts / 133 Lumens
Driver Location	Integral in canopy, remote, or above canopy (depending on canopy selected)
Dimming	Universal (TRIAC, ELV, 0-10V)
Color Rendering Index	90CRI
Input Voltage	120VAC - 50/60Hz
Cable Length	8' (for longer lengths, consult factory)

CUSTOM OPTIONS

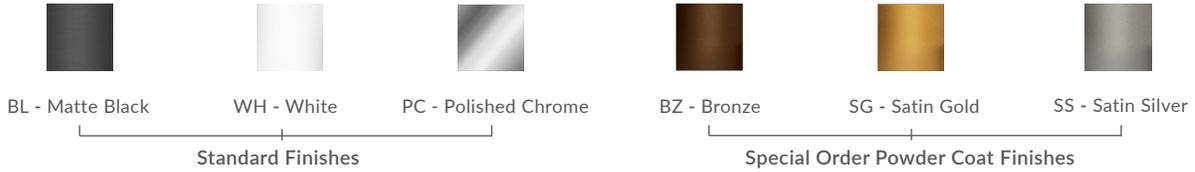See page 2 for socket finish options.

Shown in
Matte Black (BL)

2"
(5.1 cm)

5"
(12.7 cm)

1.1"
(2.8 cm)

ORDERING GUIDE

← PRODUCT CODE   OPTIONS →

CATEGORY	SERIES	DIFFUSER	SIZE	SOCKET COLOR	CCT	WATTAGE	MOUNTING	CABLE LENGTH
SP	**LGD**	**GR**	**01**					
SP Small Pendant	LGD Light Guide	GR Gradient	01 1" Diameter	**Standard** **BL** - Matte Black **WH** - White **PC** - Polished Chrome	**27K** - 2700K **30K** - 3000K **35K** - 3500K **40K** - 4000K	**2W** 2 Watts / 146 Lm **3W** 3 Watts / 234 Lm	**SP2** - 2.5" Canopy **SP5** - 5" Canopy **MPC** - Multi-Port Canopy	Indicate Cable Length in Inches - leave blank for default
				Special Order **BZ** - Bronze **SG** - Satin Gold **SS** - Satin Silver	(30K Standard)		**JTA** - JackTrack	**096 = 96" (default)** **300 = 300" (max.)**

Example Part Number: SP-LGD-GR-01-BL-30K-3W-SP2

BLACKJACK® LIGHTING

Socket Color

| BL - Matte Black | WH - White | PC - Polished Chrome | BZ - Bronze | SG - Satin Gold | SS - Satin Silver |

Standard Finishes　　　　　Special Order Powder Coat Finishes

Wattage (Lumens measured at 3000K)

2W = 2 Watts / 86 Lumens, **recommended for Multi-Port applications** (Multi-Port system and JackTrack adapter).

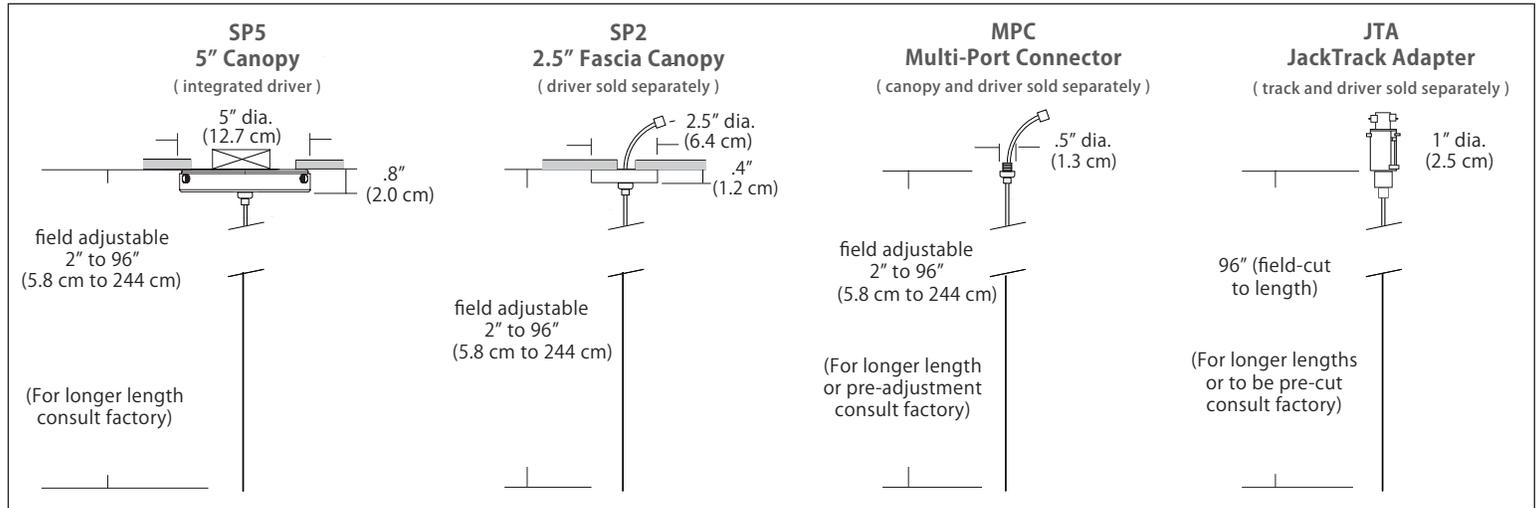**3W** = 3 Watts / 204 Lumens, **recommended for single pendant applications** (5" Canopy and 2.5" Fascia Canopy).

Mounting

SP5 = 5" round canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box
Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)

SP2 = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)
Cable with modular connector (and optional wire harness) attaches to a remote driver

MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately)
Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)
MPC options include:
Solo Systems, Duo Systems, Quatro Systems, and JackTrack Systems
MPC, MPR, MS, MQ, MD canopies

JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately)
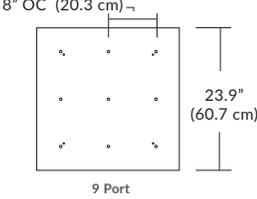*Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter*

SP5 5" Canopy (integrated driver)	SP2 2.5" Fascia Canopy (driver sold separately)	MPC Multi-Port Connector (canopy and driver sold separately)	JTA JackTrack Adapter (track and driver sold separately)
5" dia. (12.7 cm) .8" (2.0 cm) field adjustable 2" to 96" (5.8 cm to 244 cm) (For longer length consult factory)	2.5" dia. (6.4 cm) .4" (1.2 cm) field adjustable 2" to 96" (5.8 cm to 244 cm)	.5" dia. (1.3 cm) field adjustable 2" to 96" (5.8 cm to 244 cm) (For longer length or pre-adjustment consult factory)	1" dia. (2.5 cm) 96" (field-cut to length) (For longer lengths or to be pre-cut consult factory)

Cable Length

096 = 96" (Default Length).

XXX = Custom Length (300" = maximum length)

For Custom Lengths, please indicate length in inches.

For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjack.com.

| Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	**5" Canopy** Canopy and driver included with pendant	5" dia. (12.7 cm)	.8" (2 cm) (Integrated Driver)	**BL** Matte Black **PC** Pol. Chrome **WH** White **SG** Satin Gold **BZ** Bronze **SS** Satin Silver
SP2	**2.5" Fascia Canopy** Canopy included with pendant. Driver sold separately.	2.5" dia. (6.4 cm)	.4" (1.3 cm) (Remote Driver required)	
MPC MPS MQ	**24" Multi-Port Square - 9 Port** C-MPS-2409-# MQ-2409-# **24" Multi-Port Square - 25 Port** C-MPS-2425-# MQ-2425-#	8" OC (20.3 cm), 23.9" (60.7 cm), 9 Port; 4.8" OC (12.2 cm), 23.9" (60.7 cm), 25 Port	21.5" 54.6 cm, 2.5" (6 cm) (Integrated or Remote Driver)	**BL** Matte Black **PC** Pol. Chrome **WH** White **SG** Satin Gold **BZ** Bronze **SS** Satin Silver
MPC MPT MD	**38" Multi-Port Rectangle - 10 Port** C-MPT-3810-# MD-3810-# **38" Multi-Port Rectangle - 18 Port** C-MPT-3818-# MD-3818-#	7.5" OC (19), 3" OC (7.6 cm) 10 Port, 37.7" (97.8 cm); 4.1" OC (10.4 cm), 2.5" OC (6.4 cm) 18 Port, 37.7" (97.8 cm)	4.7" 11.9 cm, 2.5" (6 cm), 6" 15.2 cm (Integrated or Remote Driver)	**BL** Matte Black **PC** Pol. Chrome **WH** White **SG** Satin Gold **BZ** Bronze **SS** Satin Silver
MPC MPL	**22" Multi-Port Linear - 5 Port** C-MPL-2205-# MS-2205-# **48" Multi-Port Linear - 11 Port** C-MPL-4811-# MS-4811-#	4.4" OC (11.2 cm), 2.8" (7 cm) 5 Port, 21.8" (56 cm); 4.4" OC (11.2 cm), 48" (123 cm), 2.8" (7 cm) 11 Port	2.8" (7 cm), 1.4" (4 cm) (Integrated or Remote Driver)	**BL** Matte Black **PC** Pol. Chrome **WH** White **SG** Satin Gold **BZ** Bronze **SS** Satin Silver
MPC MPR	**10" Round - 3 Port** C-MPR-1003-# **10" Round - 9 Port** C-MPR-1009-#	11" dia. (27.9 cm), 7.4" OC (18.8 cm) 3 Port; 11" dia. (27.9 cm), 2.9" OC (7.4 cm) 9 Port	10" dia. (25.4 cm), 2.1" (5.3 cm) (Integrated Driver)	**BL** Matte Black **PC** Pol. Chrome **WH** White **SG** Satin Gold **BZ** Bronze **SS** Satin Silver
MPC MPR	**20" Round - 3 Port** C-MPR-2003-# **20" Round - 12 Port** C-MPR-2012-#	20" dia. (50.8 cm), 14.5" OC (36.8 cm) 3 Port; 20" dia. (50.8 cm), 6.4" OC (16.3 cm) 12 Port	18" dia. 45.7 cm, 2.5" (6 cm) (Integrated Driver)	**BL** Matte Black **PC** Pol. Chrome **WH** White **SG** Satin Gold **BZ** Bronze **SS** Satin Silver
JTA	**24" JackTrack** **48" JackTrack** **94" JackTrack**	23" (58.4 cm), 1.75" (4.5 cm); 47" (119.4 cm), 1.75" (4.5 cm); 94" (238.8 cm), 1.75" (4.5 cm)	1.38" (3.5 cm), 1.75" (4.5 cm) (Integrated or Remote Driver)	**BL** Matte Black **WH** White
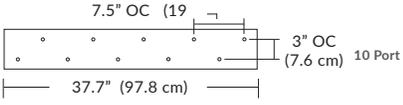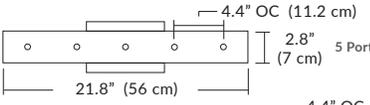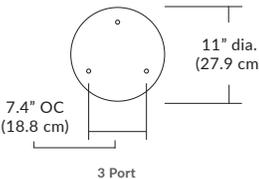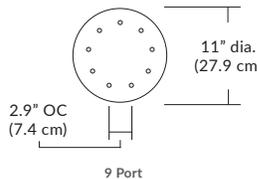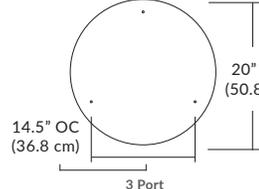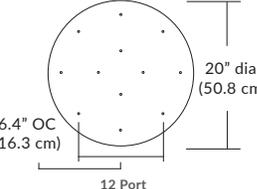
BLACKJACK® LIGHTING

For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjack.com.

System	Pendant Mounting	Configuration Examples	Finish Options

Quatro

Square Configurations

48" (122 cm)
8" OC (20.3 cm)

72" (182.9 cm)
4.8" OC (12.2 cm)

4S (4' 2x2 / 9 Port)
MQ-2409-XX-4S-X-XXK
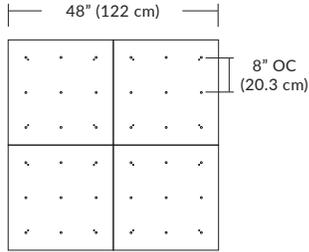
6S (6' 3x3 / 25 Port)
MQ-2425-XX-6S-X-XXK

BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver

Linear Configurations

48" (122 cm)
23.9" (60.7 cm)

72" (183 cm)
23.9" 60.7 cm
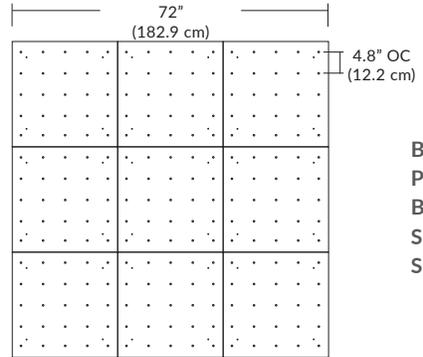
4L (4'x2' / 9 Port)
MQ-2425-XX-4L-X-XXK
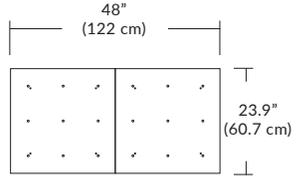
6L (6'x2' / 25 Port)
MQ-2425-XX-6L-X-XXK

Duo

Linear Configurations
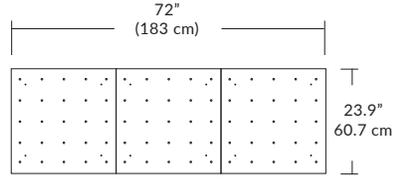
6L (6'4"x6" / 10 Port)
MD-3810-XX-6L-X-XXK

37.7" (97.8 cm)
7.5" OC (19 cm)
3" OC (7.6 cm)
76" (193 cm)
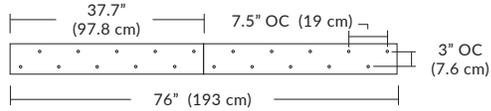
9L (9'6"x6"/ 18 Port)
MD-3818-XX-9L-X-XXK

4.1" OC (10.4 cm)
37.7" (97.8 cm)
2.5" OC (6.4 cm)
114" 290 cm

BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver

Solo

Solo 48" Linear Configuration

48" (123 cm)
4.4" OC (11.2 cm)
2.8" (7 cm)
96" (243.8 cm)

Solo (L) Configuration

2.8" (7 cm)
2.8" (7 cm)
96" (243.8 cm)
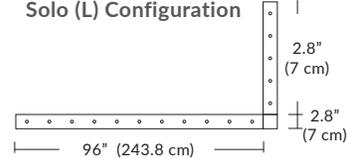
Solo 22" Grid Configuration

24.6" OC (62.5 cm)
21.8" (56 cm)
2.8" (7 cm)
52" (132 cm)
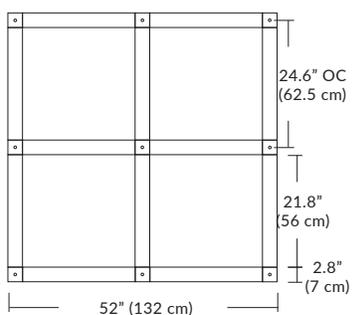
Solo 48" Grid Configuration

18.8" OC (47.8 cm)
9.4" OC (23.9 cm)
48" (123 cm)
2.8" (7 cm)
86.8" (220.5 cm)

BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver