

PROJECT:	SPECIFIER:	
SKU:		
QUANTITY:	DATE:	


LNA SUSPENDED PENDANT



SPECIFICATIONS

Finish	Matte Black (BL) or White (WH)		
LED Color Temperature	2700K, 3000K, 3500K, or 4000K (3000K Standard)		
Wattage	10 Watts		
Lumens	430 Lumens		
Driver Location	Integral in canopy		
Dimming	Universal (TRIAC / ELV / 0-10 Dimming)		
Color Rendering Index	90CRI		
Input Voltage	120-277VAC - 50/60Hz		
Fixture Weight	8 lbs. (3.6 kg)		

- Five bubble pendants are spaciously suspended from a 22" long canopy
- Pre-set cables means no cutting or splicing of wires is required
- Driver located inside canopy
- Damp location rated
- Pre-set overall height (ceiling to bottom of pendant): 25.5" (can be adjusted in field)

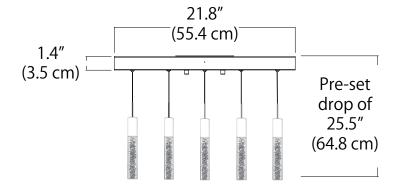



ORDERING GUIDE

SERIES LNA

LNA Linear Bubble Pendants in Level Pattern

SIZE 022P

022P 22" Canopy Length **FINISH**

BL - Matte Black WH - White

VOLTS/DIMMING

27U

27U - 120-277VAC, Universal Dimming CCT

27K 2700K 30K 3000K 35K 3500K 40K 4000K

(30K Standard)

Example: LNA - 022P - BL - 27U - 30K

