

Project:


Type:

Quantity:

Note:

SKU#: C - MPL - 2205 - _ - _ - _

Dimensions

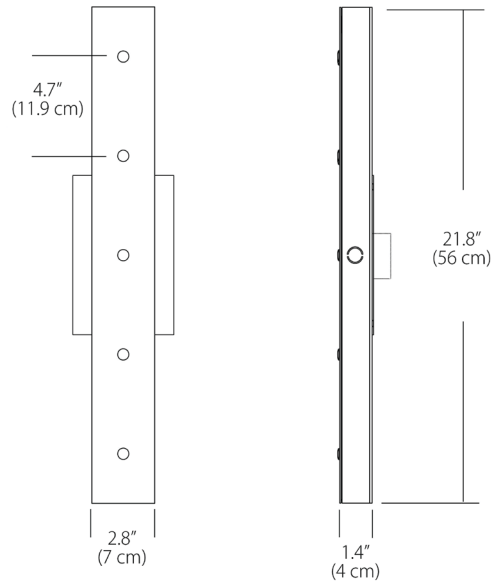

Features

- Standard black or polished chrome faceplate (with a black housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Powder coated paint finishes
- Damp location rated



Specifications


- Input Voltage: 120-277 VAC 50/60Hz
- Dimming: TRIAC / ELV / 0-10V dimmable
- For recommended dimmers, see blackjacklighting.com

Options

- Matte Black or White front faceplate available
- Remote driver is standard (contact factory for driver options)
- Optional Lutron driver available
- Standard Finishes: BL-Matte Black (with black housing) or WH-White (with white housing)

Driver Compatibility

PORTS	PENDANT WATTS	DRIVER
5	2W	20W
5	3W	40W
5	5W	60W

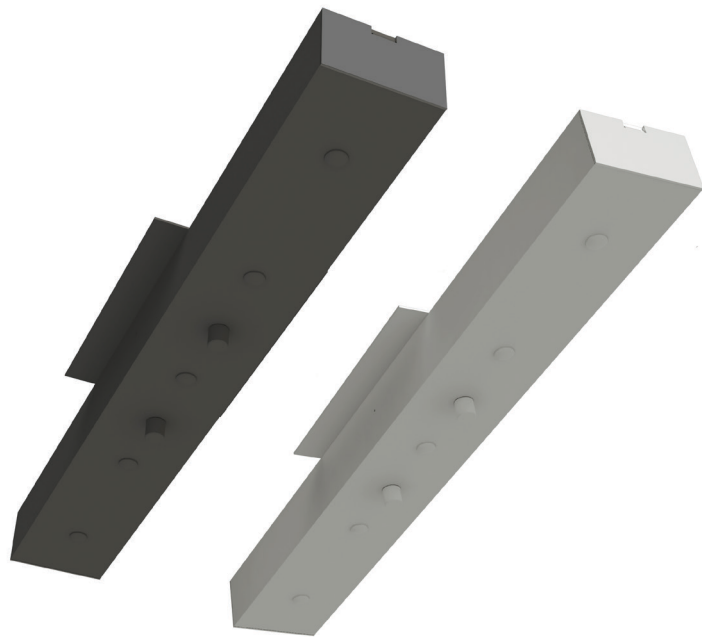

PENDANTS TO BE ORDERED SEPARATELY

ORDERING GUIDE

Family

C-MPL

Size/Type

2205

2205" 22" Length/
5 Ports

Finish

BL Matte Black
WH White

Driver Location

REM

REM Remote

Driver Watts


40W

20W 20 Watt Driver
40W 40 Watt Driver
60W 60 Watt Driver

Example: C-MPL-2205-BL-REM-40W


Pendants available separately. For full specifications and ordering information, see <http://blackjacklighting.com>

LIGHT GUIDE - 2W / 87 LM



SHORT FROSTED
LIGHT GUIDE

LGD SF 01



TALL CLEAR
LIGHT GUIDE

LGD TC 01



TALL FROSTED
LIGHT GUIDE

LGD TF 01



BUBBLE
LIGHT GUIDE

LGD BU 01



CANDLE
LIGHT GUIDE

LGD CA 01




A-LAMP
LIGHT GUIDE

LGD AL 03



GRADIENT
LIGHT GUIDE

LGD GR 01



MUSHROOM
LIGHT GUIDE

LGD MU 01

3" ACRYLIC GLOBE - 2W / 87 LM



FROSTED ACRYLIC
3" GLOBE

GLS FR 03



CLEAR ACRYLIC
3" GLOBE


GLS CL 03



BUBBLE ACRYLIC
3" GLOBE

GLS BU 03

3" GLASS GLOBE - 2W / 147 LM



WHITE GLASS
3" GLOBE

GGG WH 03

5" GLASS GLOBE - 3W / 238 LM



WHITE GLASS
5" GLOBE

GGL WH 05


5" ACRYLIC GLOBE - 5W / 368 LM



CLEAR ACRYLIC
5" GLOBE

GLL CL 05

NOVO TALL - 5W / 368 LM

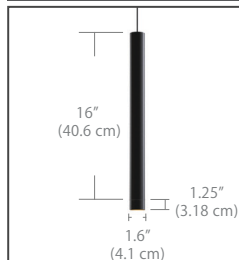

NOVO TALL
REFLECTOR RING

NVT RR 02



NOVO TALL
LUMINOUS RING

NVT LR 02



NOVO TALL
FROSTED DIFFUSER


NVT FR 02



NOVO TALL
BUBBLE DIFFUSER

NVT BU 02


TALL CONE - 3W / 133 LM

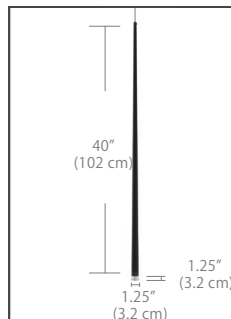

TALL CONE
LUMINOUS RING

COT LR 01


SHORT CONE - 5W / 397 LM

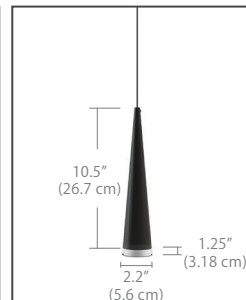

SHORT CONE
REFLECTOR RING

COS RR 01

NOVO SHORT - 5W / 368 LM




NOVO SHORT
REFLECTOR RING

NVS RR 02



NOVO SHORT
LUMINOUS RING

NVS LR 02



NOVO SHORT
FROSTED DIFFUSER


NVS FR 02



NOVO SHORT
BUBBLE DIFFUSER


NVS BU 02

24" & 36" NOVO - 5W / 368 LM



24" NOVO with
LUMINOUS RING*

NV2 LR 02

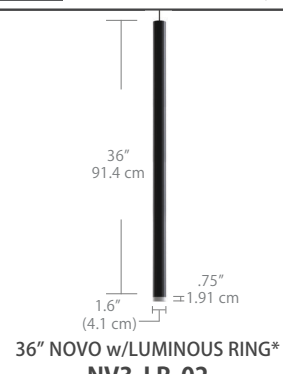

36" NOVO w/LUMINOUS RING*

NV3 LR 02

* (Can be used with any Novo Tall or Novo Short diffuser)

Pendants available separately. For full specifications and ordering information, see <http://blackjacklighting.com>

8" GLASS SPHERE - 2W / 87 LM



12" GLASS SPHERE - 5W / 368 LM



5" VELO - 2W / 87 LM



4" BULLET - 2W / 87 LM




8" BULLET - 5W / 368 LM



COLOR GEL - 2W / 87 LM



10" PILLBOX - 12W 680 LM

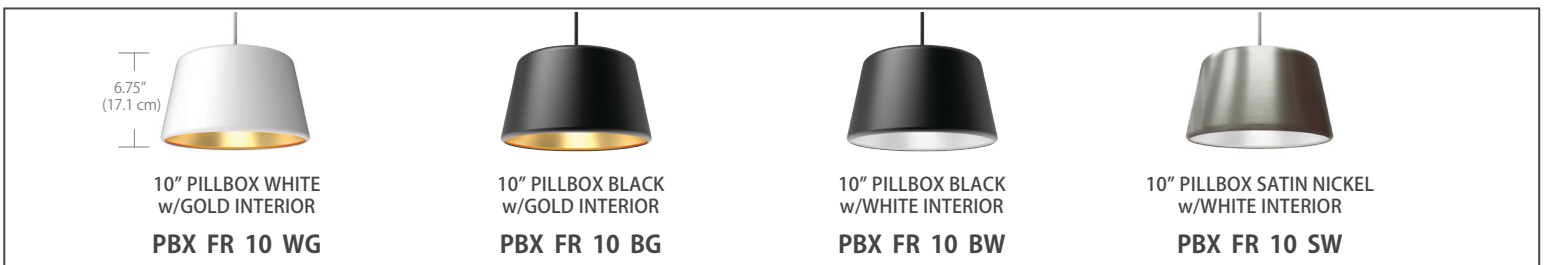

16" DOMOS - 12W - 680 LM




For more details and ordering information, consult factory.

I. Universal Driver



Universal dimmable (TRIAC, ELV or 0-10V), Flicker-free dimming 100% to 2% (with optimal configuration), auto reset, short circuit, overload and thermal protection

SKU	Watts	Output Volts	Input Volts	Mounting	Comments
PS-94ST-20W-27U-IN	20W	24V	120V - 277V	Integral	(27U)
PS-94ST-20W-27U-IC	20W	24V	120V - 277V	Inside Canopy	(27U)
PS-94ST-40W-27U-IN	40W	24V	100V - 305V	Integral	(27U)
PS-94ST-40W-27U-IC	40W	24V	120V - 277V	Inside Canopy	(27U)
PS-94ST-60W-27U-IN	60W	24V	120V - 277V	Integral	(27U)
PS-94ST-96W-27U-IN	96W	24V	120V - 277V	Integral	(27U)
PS-94ST-60W-27U-RE	60W	24V	120V - 277V	Remote	(27U)
PS-94ST-96W-27U-RE	96W	24V	120V - 277V	Remote	(27U)

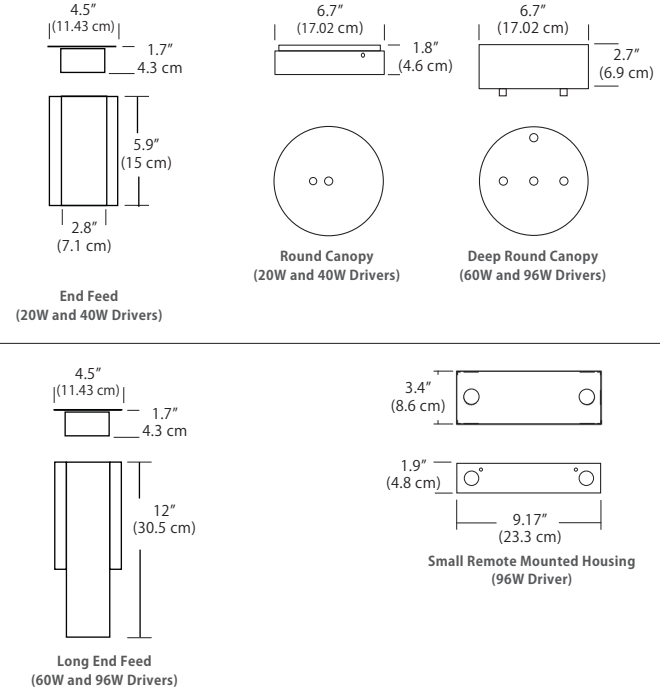


II. LUTRON Hi-Lume Drivers



Continuous flicker-free dimming, auto reset, short circuit, overload and thermal protection. Compatible with most Lutron dimming control systems

Watts	Output Volts	Input Volts	Mounting	Comments
40W	24V	120V - 277V	- Inside Canopy	3 Wire (27E) Dims 100% - 1%
40W	24V	120V	- Inside Canopy	2 Wire (12T) Dims 100% - 1%
40W	24V	120V - 277V	- Remote	3 Wire (27E) Dims 100% - 1%
40W	24V	120V	- Remote	2 Wire (12T) Dims 100% - 1%
96W	24V	120V - 277V	- Remote	3 Wire (27E) Dims 100% - 1%

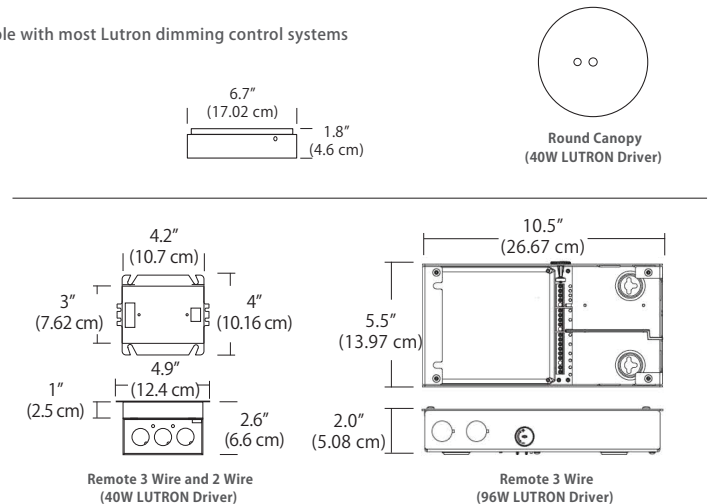

DRIVER ORDERING GUIDE

Type



94SR Universal Driver in Remote Canopy
94ST Universal (Standard)
94LT Lutron
94CS Customer Specification

Watts



20W 20 Watts
40W 40 Watts
60W 60 Watts
96W 96 Watts

Dimming



12T TRIAC Dimming
27U 120-277V/ Universal Dimming (TRIAC / ELV / 0-10V)
27E 120-277V/ Lutron EcoSystem

Mounting



IN Integral
RE Remote
IC Inside Canopy

Example: 94ST-96W-27U-RE