


PROJECT:	SPECIFIER:
SKU:	
QUANTITY:	DATE:

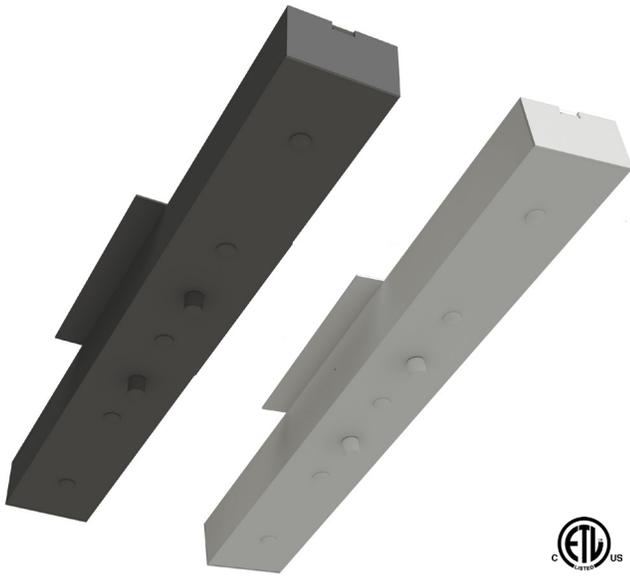

Features


- Standard Matte Black or Polished Chrome faceplate (w/Matte Black housing)
- Standard White faceplate (w/White housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Driver located in canopy housing
- Damp location rated

Specifications

- Input Voltage: 120-277 VAC, 50/60Hz
- Dimming: TRIAC / ELV / 0-10V dimmable
- For recommended dimmers, see blackjacklighting.com

PENDANTS TO BE ORDERED SEPARATELY

Dimensions

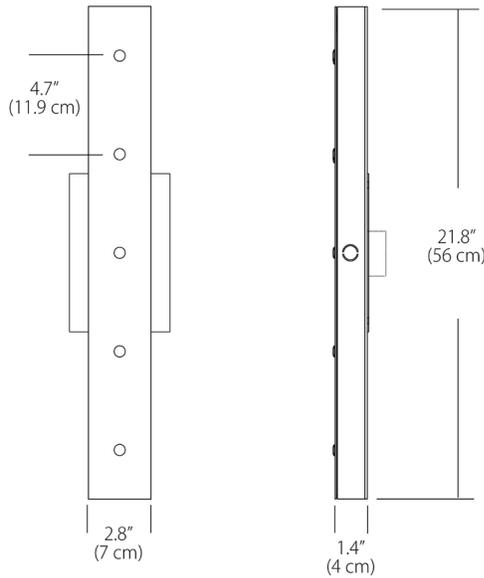

Driver Compatibility

PORTS	PENDANT WATTS	DRIVER
5	2W	20W
5	3W	40W
5	5W	60W

ORDERING GUIDE

Family	Size/Type	Finish	Driver Location	Driver Watts
C-MPL	2205		REM	
C-MPL Canopy Multi-Port Linear	2205 22" Length 5 Ports	BL Matte Black WH White	REM Remote Location	20W 20 Watt Driver 40W 40 Watt Driver 60W 60 Watt Driver

Example: C-MPL-2205-BL-REM-20W

Pendants available separately. For full specifications and ordering information, see blackjacklighting.com.

LIGHT GUIDE - 2W / 86 LM

<p>SHORT FROSTED LIGHT GUIDE LGDSF</p>	<p>TALL CLEAR LIGHT GUIDE LGDC</p>	<p>TALL FROSTED LIGHT GUIDE LGDTF</p>	<p>BUBBLE LIGHT GUIDE LGDBU</p>	<p>CANDLE LIGHT GUIDE LGDC</p>	<p>A-LAMP LIGHT GUIDE LGDAL</p>	<p>GRADIENT LIGHT GUIDE LGDGR</p>	<p>MUSHROOM LIGHT GUIDE LGDML</p>
--	--	---	---	--	---	---	---

3" ACRYLIC GLOBE - 2W / 86 LM

<p>FROSTED ACRYLIC 3" GLOBE GLSFR</p>	<p>CLEAR ACRYLIC 3" GLOBE GLSLC</p>	<p>BUBBLE ACRYLIC 3" GLOBE GLSBU</p>
---	---	--

3" GLASS GLOBE - 2W / 147 LM

<p>WHITE GLASS 3" GLOBE GGSWH</p>

5" GLASS GLOBE - 3W / 238 LM

<p>WHITE GLASS 5" GLOBE GGLWH</p>

5" ACRYLIC GLOBE - 5W / 368 LM

<p>CLEAR ACRYLIC 5" GLOBE GLLCL</p>

NOVO TALL - 5W / 368 LM

<p>NOVO TALL REFLECTOR RING GOLD - NVTRG WHITE - NVTRW</p>	<p>NOVO TALL LUMINOUS RING NVTLR</p>	<p>NOVO TALL FROSTED DIFFUSER NVTFR</p>	<p>NOVO TALL BUBBLE DIFFUSER NVTBU</p>
---	--	---	--

TALL CONE - 3W / 204 LM

<p>TALL CONE LUMINOUS RING COTLR</p>
--

SHORT CONE - 5W / 397 LM

<p>SHORT CONE REFLECTOR RING COSRR</p>
--

NOVO SHORT - 5W / 368 LM

<p>NOVO SHORT REFLECTOR RING GOLD - NVSRR WHITE - NVSRW</p>	<p>NOVO SHORT LUMINOUS RING NVSLR</p>	<p>NOVO SHORT FROSTED DIFFUSER NVSFR</p>	<p>NOVO SHORT BUBBLE DIFFUSER NVSBU</p>
--	---	--	---

24" & 36" NOVO - 5W / 368 LM * (Can be used with any Novo Tall or Novo Short diffuser)

<p>24" NOVO with LUMINOUS RING* NV2LR</p>	<p>36" NOVO w/LUMINOUS RING* NV3LR</p>
---	--

Pendants available separately. For full specifications and ordering information, see blackjacklighting.com.

8" GLASS SPHERE - 2W / 86 LM



12" GLASS SPHERE - 5W / 368 LM



5" VELO - 2W / 86 LM



4" BULLET - 2W / 86 LM



8" BULLET - 5W / 368 LM



3" COLOR GEL - 2W / 86 LM



10" PILLBOX - 12W / 680 LM



16" DOMOS - 12W / 680 LM



For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjacklighting.com.

Universal Drivers




Universal dimmable (TRIAC, ELV or 0-10V), Flicker-free dimming 100% to 2%, auto reset, short circuit, overload and thermal protection.
 Input Volts: 120-277V. Output Volts: 24V.

	SP2	SP5	Round	Quatro	Duo	Solo	JackTrack
Description	Round 2.5" Fascia Canopy	Round 5" Canopy	Round 10" Round 20" Canopies	Square 24" Canopy	Rectangular 38" Canopy	Rectangular 22" Canopy 48" Canopy	Linear Track
System #				MQ-XXX	MD-XXX	MS-XXX	J1-XXX
Canopy #	XXX-SP2	XXX-SP5	C-MPR-XXX	C-MPS-XXX	C-MPT-XXX	C-MPL-XXX	


SKU	Watts						
INTEGRAL MOUNTED (Inside Fixture)							
PS-94ST-15W-27U-IN	15W		X				
PS-94ST-20W-27U-IN	20W			X	X	X	
PS-94ST-40W-27U-IN	40W			X	X	X	
PS-94ST-60W-27U-IN	60W			X	X	X	
PS-94ST-96W-27U-IN	96W			X	X	X	
CANOPY MOUNTED (Inside Mounting Canopy)							
PS-94ST-20W-27U-IC	20W						X
PS-94ST-40W-27U-IC	40W						X
PS-94ST-40W-27U-IC	40W						X
PS-94SR-60W-27U-IC	60W						X
PS-94SR-96W-27U-IC	96W						X
PS-94ST-300-27U-IC	300W						X
REMOTE MOUNTED (Inside Remote Housing)							
PS-94ST-40W-27U-RE	40W	X		X	X	X	X
PS-94ST-60W-27U-RE	60W	X		X	X	X	X
PS-94ST-96W-27U-RE	96W	X		X	X	X	X
PS-94ST-300-27U-RE	300W						X

Remote Canopy Mounting Options

For additional information on mounting options and canopy sizes, please refer to other pages in this specification sheet.



Remote Mounted Housing
(40W, 60W, or 96W Driver)



Remote Mounted Housing
(300W Driver)