



Features


- Standard Matte Black or Polished Chrome faceplate (w/Matte Black housing)
- Standard White faceplate (w/White housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Remote Driver is Standard; Integral Drivers available, consult factory
- Damp location rated

Specifications

- Input Voltage: 120-277 VAC, 50/60Hz
- Dimming: TRIAC / ELV / 0-10V dimmable
- For recommended dimmers, see blackjacklighting.com

PENDANTS TO BE ORDERED SEPARATELY

Dimensions

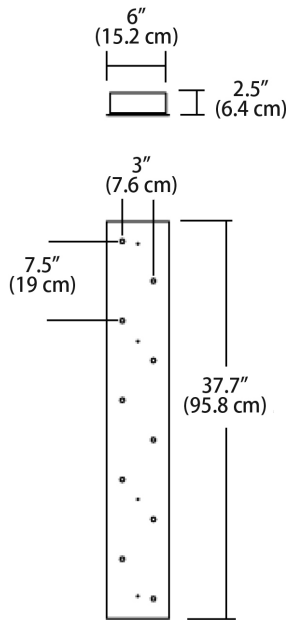

Driver Compatibility

PORTS	PENDANT WATTS	DRIVER
10	2W	40W
10	3W	40W
10	5W	60W

For other variations, contact factory or see blackjacklighting.com.

ORDERING GUIDE

Family	Size/Type	Finish	Driver Location	Driver Watts
C-MPT	3810			
C-MPT Canopy Multi-Port Rectangle	3810 38" Length 10 Ports	BL Matte Black WH White	UIN Integral Location	20W 20 Watt Integral Driver 40W 40 Watt Integral Driver 60W 60 Watt Remote Driver

Example: C-MPT-3810-BL-UIN-40W

SMALL PENDANTS - 2W/86LM or 3W/133 LM



GLOBE PENDANTS



BULLET PENDANTS



GLASS SPHERE PENDANTS




10" PILLBOX PENDANTS





16" DOMOS PENDANTS



CONE PENDANTS

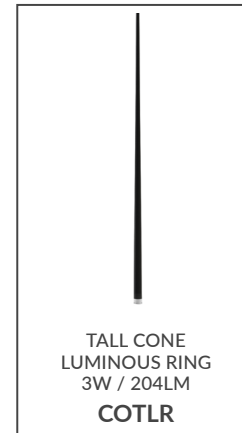

NOVO SHORT PENDANTS - 5W/368LM

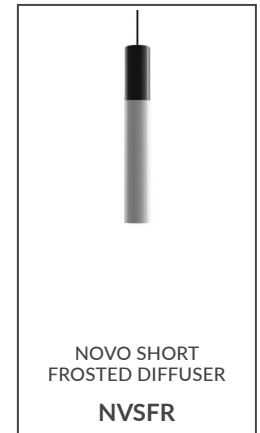
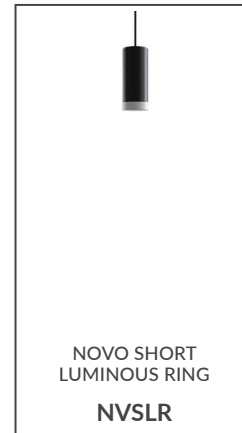


NOVO PENDANTS - 5W/368LM



(* Can be used with any Novo Tall or Novo Short diffuser.

NOVO HIGH OUTPUT - 8W/710LM

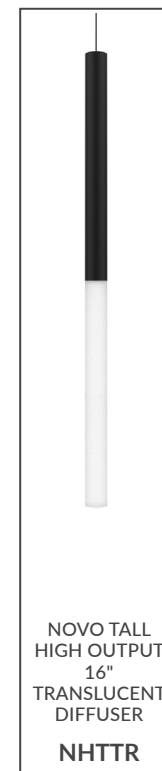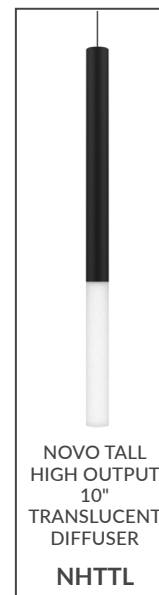

For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjacklighting.com.

Universal Drivers




Universal dimmable (TRIAC, ELV or 0-10V), Flicker-free dimming 100% to 2%, auto reset, short circuit, overload and thermal protection.
 Input Volts: 120-277V. Output Volts: 24V.

	SP2	SP5	Round	Quatro	Duo	Solo	JackTrack
Description	Round 2.5" Fascia Canopy	Round 5" Canopy	Round 10" Round 20" Canopies	Square 24" Canopy	Rectangular 38" Canopy	Rectangular 22" Canopy 48" Canopy	Linear Track
System #				MQ-XXX	MD-XXX	MS-XXX	J1-XXX
Canopy #	XXX-SP2	XXX-SP5	C-MPR-XXX	C-MPS-XXX	C-MPT-XXX	C-MPL-XXX	


SKU	Watts						
INTEGRAL MOUNTED (Inside Fixture)							
PS-94ST-15W-27U-IN	15W		X				
PS-94ST-20W-27U-IN	20W			X	X	X	
PS-94ST-40W-27U-IN	40W			X	X	X	
PS-94ST-60W-27U-IN	60W			X	X	X	
PS-94ST-96W-27U-IN	96W			X	X	X	
CANOPY MOUNTED (Inside Mounting Canopy)							
PS-94ST-20W-27U-IC	20W						X
PS-94ST-40W-27U-IC	40W						X
PS-94ST-40W-27U-IC	40W						X
PS-94SR-60W-27U-IC	60W						X
PS-94SR-96W-27U-IC	96W						X
PS-94ST-300-27U-IC	300W						X
REMOTE MOUNTED (Inside Remote Housing)							
PS-94ST-40W-27U-RE	40W	X		X	X	X	X
PS-94ST-60W-27U-RE	60W	X		X	X	X	X
PS-94ST-96W-27U-RE	96W	X		X	X	X	X
PS-94ST-300-27U-RE	300W						X

Remote Canopy Mounting Options

For additional information on mounting options and canopy sizes, please refer to other pages in this specification sheet.



Remote Mounted Housing
(40W, 60W, or 96W Driver)

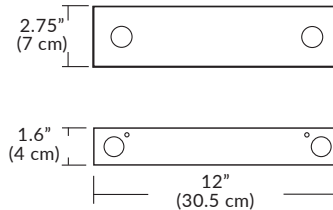

Remote Mounted Housing
(300W Driver)