

## Features

- Standard black, white, or polished chrome faceplate (with a black housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Driver located in canopy housing
- Damp location rated

## Specifications


- Input Voltage: 120-277 VAC 50/60Hz
- Dimming: TRIAC / ELV / 0-10V dimmable
- For recommended dimmers, see [blackjacklighting.com](http://blackjacklighting.com)

## Options

- BL - Matte Black, WH - White, or PC - Polished Chrome front faceplate available
- Special order finishes available: BZ - Bronze, SG - Satin Gold, and SS - Satin Silver

**PENDANTS TO BE ORDERED SEPARATELY**

## Dimensions

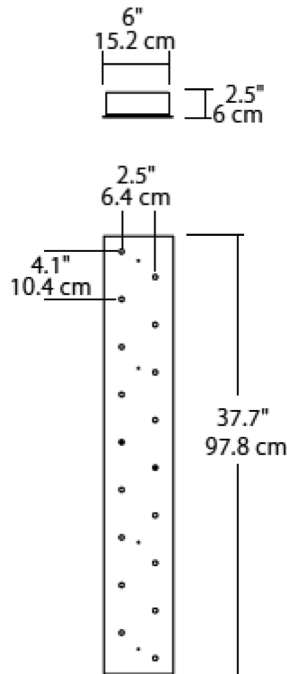

## Driver Compatibility

PORTS	PENDANT WATTS	DRIVER
18	2W	40W
18	3W	60W
18	5W	96W

For other variations, contact factory or see [blackjacklighting.com](http://blackjacklighting.com).

## ORDERING GUIDE

Family	Size/Type	Finish	Driver Location	Driver Watts
<b>C-MPT</b>	<b>3818</b>			
C-MPT Canopy Multi-Port Rectangle	3818 38" Length 18 Ports	BL Matte Black WH White	UIN Integral Location	20W Integral Driver 40W 40 Watt Integral Driver 60W 60 Watt Remote Driver

Example: C-MPT-3818-BL-UIN-40W

## SMALL PENDANTS - 2W/86LM or 3W/133 LM

 SHORT FROSTED LIGHT GUIDE <b>LGDSF</b>	 TALL FROSTED LIGHT GUIDE <b>LGDTF</b>	 TALL CLEAR LIGHT GUIDE <b>LGDTC</b>	 A-LAMP LIGHT GUIDE <b>LGDAL</b>	 MUSHROOM LIGHT GUIDE <b>LGDMU</b>	 SAUCER LIGHT GUIDE <b>LGDSC</b>	 CLEAR POINT LIGHT GUIDE <b>LGDPT</b>
 FROSTED ACRYLIC 3" GLOBE <b>GLSFR</b>	 CLEAR ACRYLIC 3" GLOBE <b>LGDTF</b>	 RED COLOR GEL <b>CGLRD</b>	 BLUE COLOR GEL <b>CGLBL</b>	 GREEN COLOR GEL <b>CGLGN</b>	 VELO CLEAR GLASS <b>VELCL</b>	

## GLOBE PENDANTS

 WHITE GLASS 3" GLOBE 2W / 147LM <b>GGSWH</b>	 WHITE GLASS 5" GLOBE 3W / 238LM <b>GGLWH</b>	 CLEAR ACRYLIC 5" GLOBE 3W / 238LM <b>GLLCL</b>
---	---	---

## BULLET PENDANTS

 4" BULLET - 2W / 86LM BL/COPPER or WH/GOLD <b>BL4BC</b>	 8" BULLET - 5W / 368LM BL/COPPER or WH/GOLD <b>BL8WG</b>
--	---

## GLASS SPHERE PENDANTS

 8" CLEAR GLASS SPHERE 2W / 86LM 3W / 133LM <b>SPSCL</b>	 12" CLEAR GLASS SPHERE 5W / 368LM <b>SPLCL</b>	 12" WHITE FROSTED GLASS SPHERE 5W / 368LM <b>SPLWF</b>
---	---	--


## 10" PILLBOX PENDANTS





## 16" DOMOS PENDANTS



## CONE PENDANTS

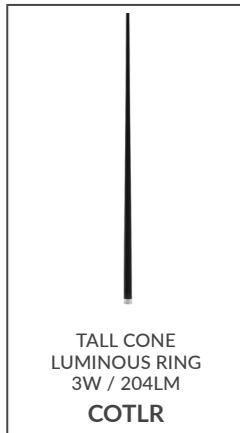

## NOVO SHORT PENDANTS - 5W/368LM

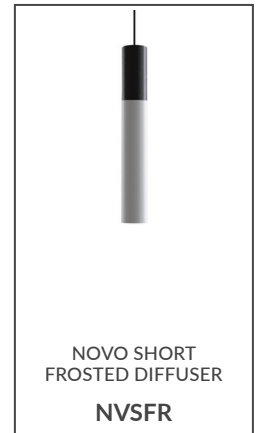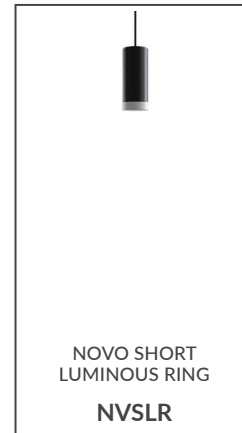


## NOVO PENDANTS - 5W/368LM



(\* Can be used with  
any Novo Tall or  
Novo Short diffuser.

## NOVO HIGH OUTPUT - 8W/710LM

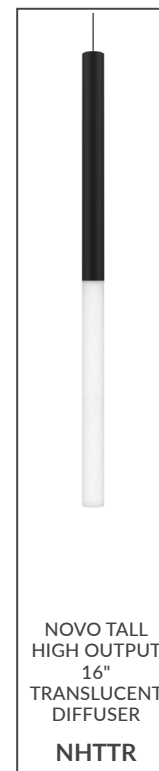

For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see [blackjacklighting.com](http://blackjacklighting.com).

## Universal Drivers





Universal dimmable (TRIAC, ELV or 0-10V), Flicker-free dimming 100% to 2%, auto reset, short circuit, overload and thermal protection.  
 Input Volts: 120-277V. Output Volts: 24V.

	SP2	SP5	Round	Quatro	Duo	Solo	JackTrack
<b>Description</b>	Round 2.5" Fascia Canopy	Round 5" Canopy	Round 10" Round 20" Canopies	Square 24" Canopy	Rectangular 38" Canopy	Rectangular 22" Canopy 48" Canopy	Linear Track
<b>System #</b>				MQ-XXX	MD-XXX	MS-XXX	J1-XXX
<b>Canopy #</b>	XXX-SP2	XXX-SP5	C-MPR-XXX	C-MPS-XXX	C-MPT-XXX	C-MPL-XXX	


SKU	Watts						
<b>INTEGRAL MOUNTED (Inside Fixture)</b>							
PS-94ST-15W-27U-IN	15W		X				
PS-94ST-20W-27U-IN	20W			X	X	X	
PS-94ST-40W-27U-IN	40W			X	X	X	
PS-94ST-60W-27U-IN	60W			X	X	X	
PS-94ST-96W-27U-IN	96W			X	X	X	
<b>CANOPY MOUNTED (Inside Mounting Canopy)</b>							
PS-94ST-20W-27U-IC	20W						X
PS-94ST-40W-27U-IC	40W						X
PS-94ST-40W-27U-IC	40W						X
PS-94SR-60W-27U-IC	60W						X
PS-94SR-96W-27U-IC	96W						X
PS-94ST-300-27U-IC	300W						X
<b>REMOTE MOUNTED (Inside Remote Housing)</b>							
PS-94ST-40W-27U-RE	40W	X		X	X	X	X
PS-94ST-60W-27U-RE	60W	X		X	X	X	X
PS-94ST-96W-27U-RE	96W	X		X	X	X	X
PS-94ST-300-27U-RE	300W						X

## Remote Canopy Mounting Options

For additional information on mounting options and canopy sizes, please refer to other pages in this specification sheet.



Remote Mounted Housing  
(40W, 60W, or 96W Driver)



Remote Mounted Housing  
(300W Driver)