

PROJECT:		SPECIFIER:	
SKU:			
QUANTITY:		DATE:	



Features


- Standard Matte Black or Polished Chrome faceplate (w/Matte Black housing)
- Standard White faceplate (w/White housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Remote Driver is Standard; Integral Drivers available, consult factory
- Damp location rated

Specifications

- Input Voltage: 120-277 VAC, 50/60Hz
- Dimming: TRIAC / ELV / 0-10V dimmable
- For recommended dimmers, see blackjacklighting.com

PENDANTS TO BE ORDERED SEPARATELY

Dimensions

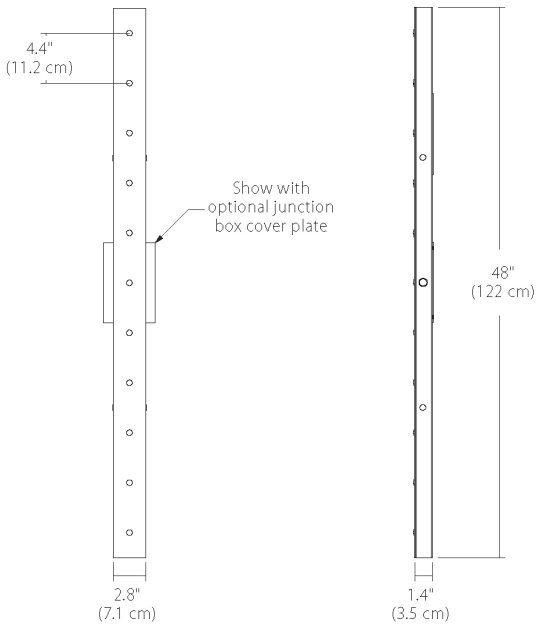

Driver Compatibility


PORTS	PENDANT WATTS	DRIVER
11	2W	40W
11	5W	60W
7 Ports Max.	12W	96W

ORDERING GUIDE


Family	Size/Type	Finish	Driver Location	Driver Watts
C-MPL C-MPL Canopy Multi-Port Linear	4811 4811 48" Length 11 Ports	 BL Matte Black WH White	 REM Remote Location IN Internal Location	 20W 20 Watt Integral Driver 40W 40 Watt Integral Driver 60W 60 Watt Remote Driver 96W 96 Watt Remote Driver
Example: C-MPL-4811-BL-REM-20W				

Pendants available separately. For full specifications and ordering information, see blackjacklighting.com.


LIGHT GUIDE - 2W / 86 LM

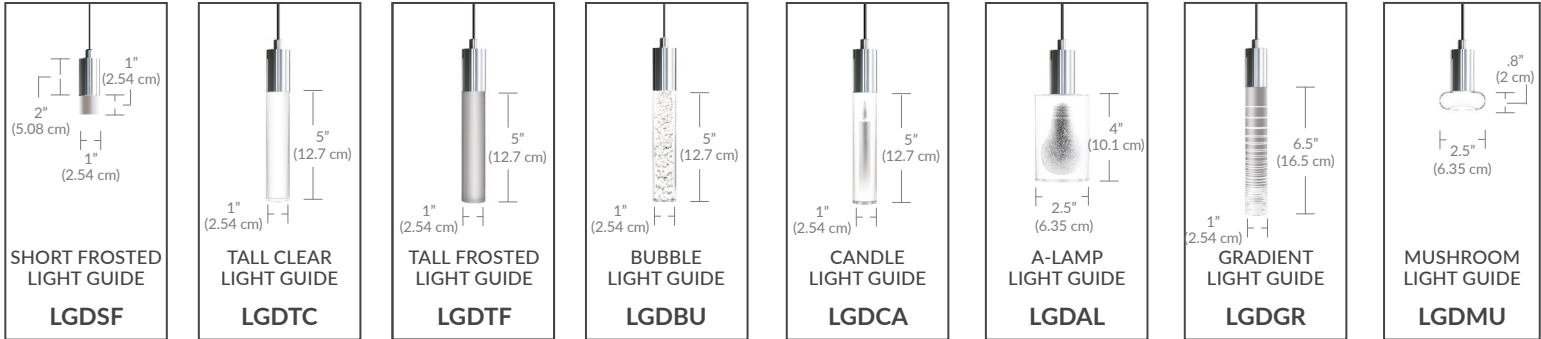

3" ACRYLIC GLOBE - 2W / 86 LM

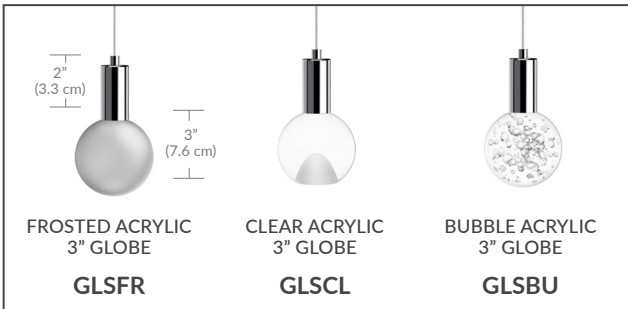

3" GLASS GLOBE - 2W / 147 LM




5" GLASS GLOBE - 3W / 238 LM




5" ACRYLIC GLOBE - 5W / 368 LM




NOVO TALL - 5W / 368 LM

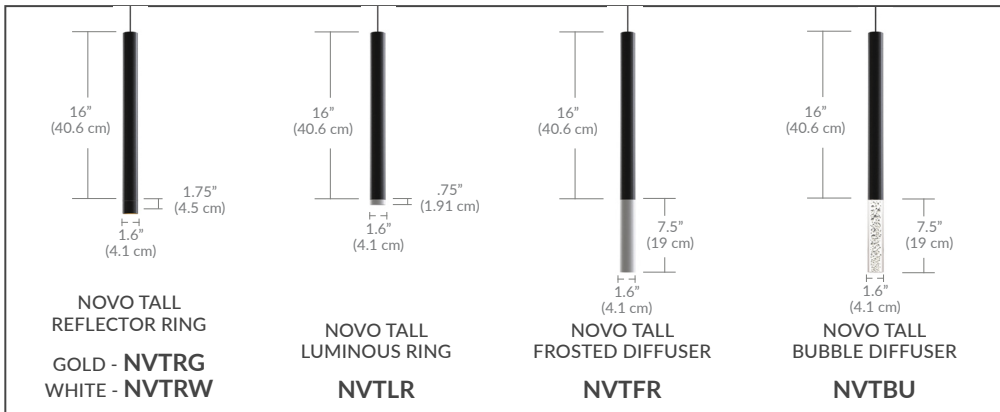


TALL CONE - 3W / 204 LM

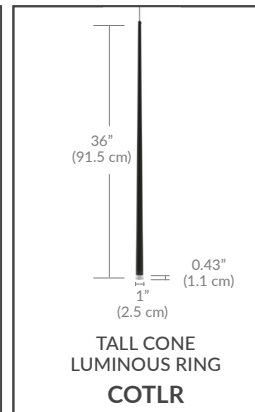


SHORT CONE - 5W / 397 LM

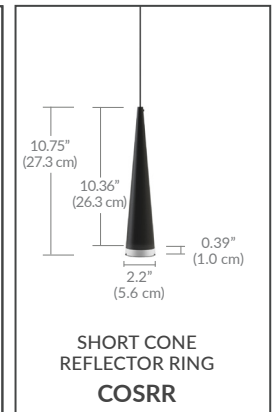

NOVO SHORT - 5W / 368 LM

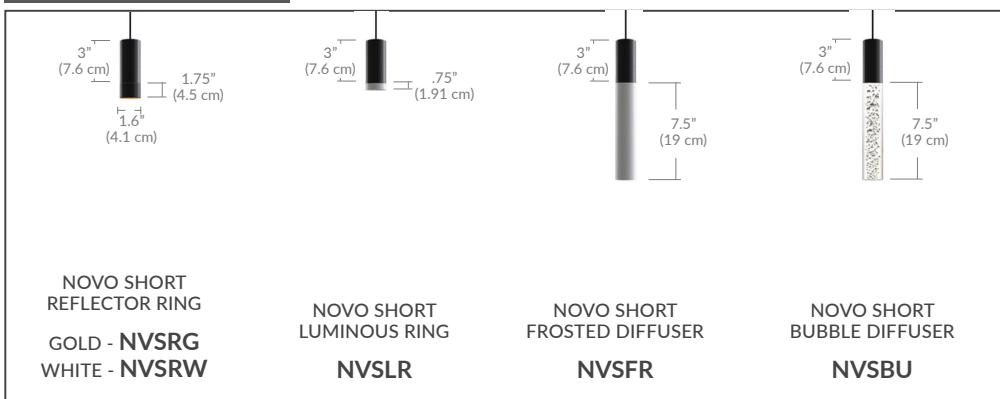


24" & 36" NOVO - 5W / 368 LM

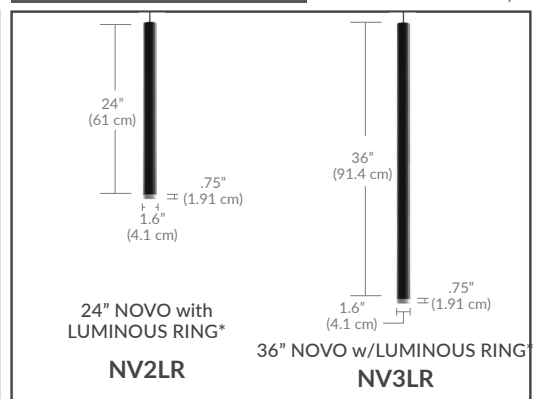

* (Can be used with any Novo Tall or Novo Short diffuser)

Pendants available separately. For full specifications and ordering information, see blackjacklighting.com.

8" GLASS SPHERE - 2W / 86 LM

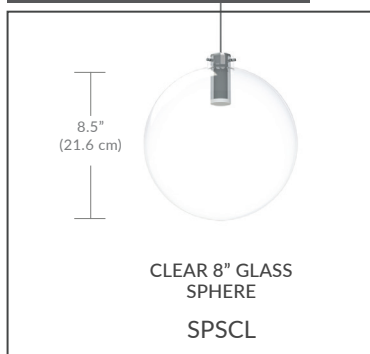

12" GLASS SPHERE - 5W / 368 LM



5" VELO - 2W / 86 LM



4" BULLET - 2W / 86 LM



8" BULLET - 5W / 368 LM



3" COLOR GEL - 2W / 86 LM



10" PILLBOX - 12W / 680 LM



16" DOMOS - 12W / 680 LM



For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjacklighting.com.

Universal Drivers


Universal dimmable (TRIAC, ELV or 0-10V), Flicker-free dimming 100% to 2%, auto reset, short circuit, overload and thermal protection.
Input Volts: 120-277V. Output Volts: 24V.

	SP2	SP5	Round	Quatro	Duo	Solo	JackTrack
Description	Round 2.5" Fascia Canopy	Round 5" Canopy	Round 10" Round 20" Canopies	Square 24" Canopy	Rectangular 38" Canopy	Rectangular 22" Canopy 48" Canopy	Linear Track
System #				MQ-XXX	MD-XXX	MS-XXX	J1-XXX
Canopy #	XXX-SP2	XXX-SP5	C-MPR-XXX	C-MPS-XXX	C-MPT-XXX	C-MPL-XXX	


SKU	Watts						
INTEGRAL MOUNTED (Inside Fixture)							
PS-94ST-15W-27U-IN	15W	X					
PS-94ST-20W-27U-IN	20W		X	X	X		
PS-94ST-40W-27U-IN	40W		X	X	X		
PS-94ST-60W-27U-IN	60W		X	X	X		
PS-94ST-96W-27U-IN	96W		X	X	X		
CANOPY MOUNTED (Inside Mounting Canopy)							
PS-94ST-20W-27U-IC	20W					X	
PS-94ST-40W-27U-IC	40W					X	X
PS-94ST-40W-27U-IC	40W						X
PS-94SR-60W-27U-IC	60W					X	X
PS-94SR-96W-27U-IC	96W					X	X
PS-94ST-300-27U-IC	300W						X
REMOTE MOUNTED (Inside Remote Housing)							
PS-94ST-40W-27U-RE	40W	X	X	X	X	X	X
PS-94ST-60W-27U-RE	60W	X	X	X	X	X	X
PS-94ST-96W-27U-RE	96W	X	X	X	X	X	X
PS-94ST-300-27U-RE	300W						X

Remote Canopy Mounting Options

For additional information on mounting options and canopy sizes, please refer to other pages in this specification sheet.



Remote Mounted Housing
(40W, 60W, or 96W Driver)



Remote Mounted Housing
(300W Driver)