



9-Port, White



Features

- Standard Matte Black or Polished Chrome faceplate (w/Matte Black housing)
- Standard White faceplate (w/White housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Driver located in canopy housing
- Damp location rated


Specifications

- Input Voltage: 120-277 VAC, 50/60Hz
- Dimming: TRIAC / ELV / 0-10V dimmable
- For recommended dimmers, see blackjacklighting.com

Options

- Special order finishes available: BZ - Bronze, SG - Satin Gold, or SS - Satin Silver

Dimensions

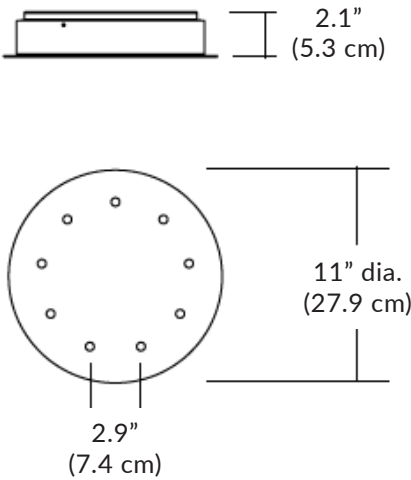

Driver Compatibility

PORTS	PENDANT WATTS	DRIVER
9	2W	20W
9	3W	40W
9	5W	60W



9-Port, Matte Black



9-Port, Polished Chrome


PENDANTS TO BE ORDERED SEPARATELY

ORDERING GUIDE


Family	Size/Type	Finish	Driver Location	Driver Watts
C-MPR	1009		UIN	
C-MPS Canopy Multi-Port Round	1009 10" Diameter 9 Ports	BL Matte Black PC Polished Chrome WH White Special Order BZ Bronze SG Satin Gold SS Satin Silver	UIN UIN Integral	20W 20 Watt Driver 40W 40 Watt Driver 60W 60 Watt Driver
Example: C-MPR-1009-BL-UIN-40W				

Pendants available separately. For full specifications and ordering information, see blackjacklighting.com.


LIGHT GUIDE - 2W / 86 LM

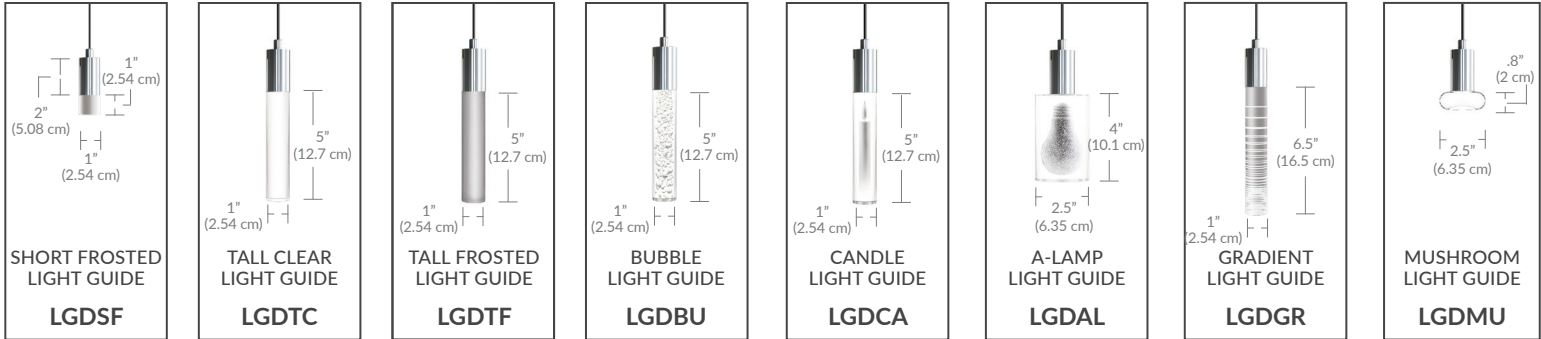


3" ACRYLIC GLOBE - 2W / 86 LM

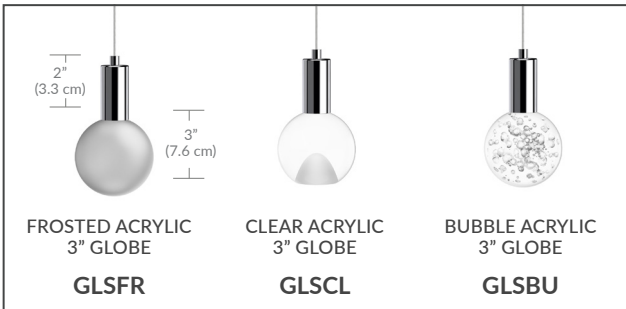

3" GLASS GLOBE - 2W / 147 LM




5" GLASS GLOBE - 3W / 238 LM




5" ACRYLIC GLOBE - 5W / 368 LM




NOVO TALL - 5W / 368 LM

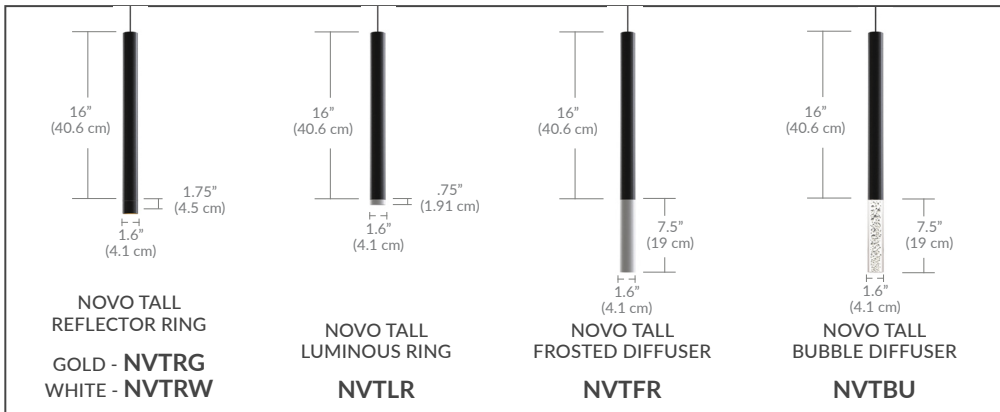


TALL CONE - 3W / 204 LM

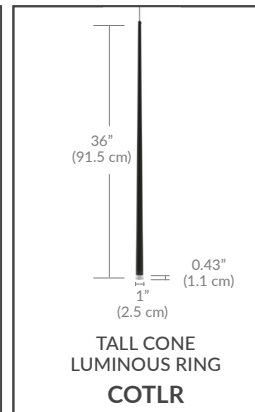


SHORT CONE - 5W / 397 LM

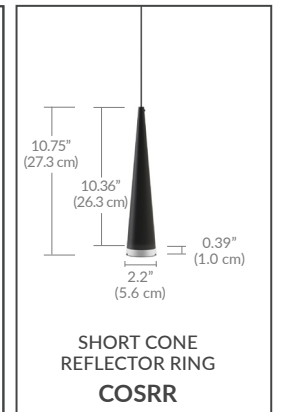

NOVO SHORT - 5W / 368 LM

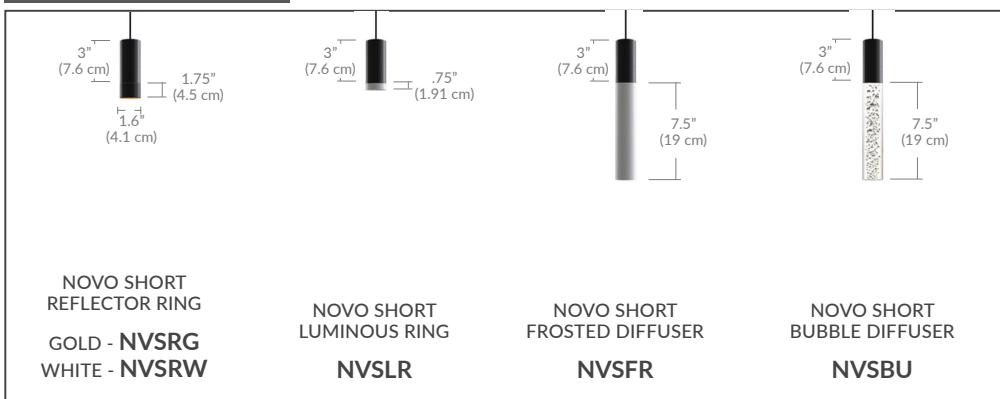


24" & 36" NOVO - 5W / 368 LM

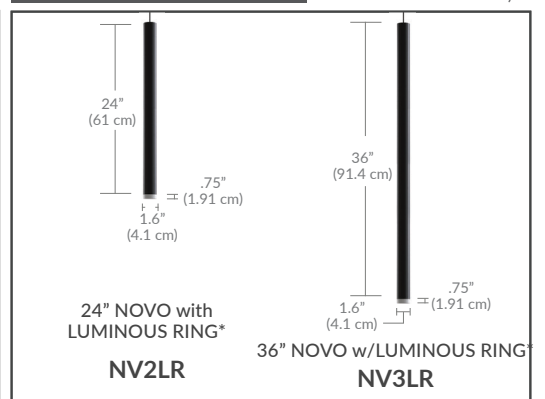

* (Can be used with any Novo Tall or Novo Short diffuser)

Pendants available separately. For full specifications and ordering information, see blackjacklighting.com.

8" GLASS SPHERE - 2W / 86 LM

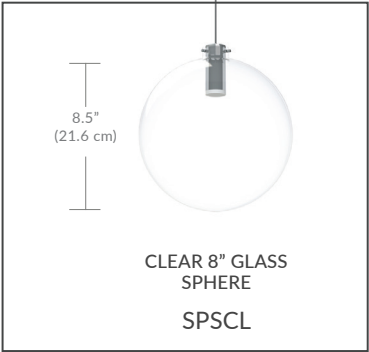

12" GLASS SPHERE - 5W / 368 LM



5" VELO - 2W / 86 LM



4" BULLET - 2W / 86 LM




8" BULLET - 5W / 368 LM



3" COLOR GEL - 2W / 86 LM



10" PILLBOX - 12W / 680 LM

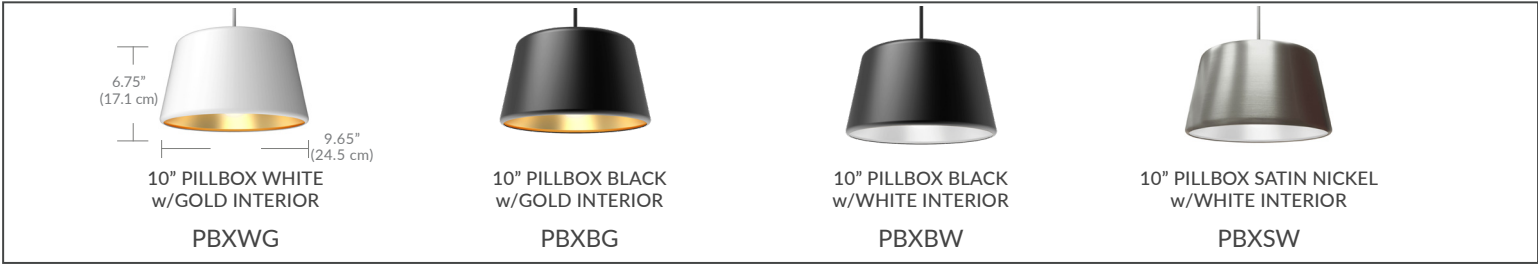

16" DOMOS - 12W / 680 LM



For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjacklighting.com.

Universal Drivers


Universal dimmable (TRIAC, ELV or 0-10V), Flicker-free dimming 100% to 2%, auto reset, short circuit, overload and thermal protection.
Input Volts: 120-277V. Output Volts: 24V.

	SP2	SP5	Round	Quatro	Duo	Solo	JackTrack
Description	Round 2.5" Fascia Canopy	Round 5" Canopy	Round 10" Round 20" Canopies	Square 24" Canopy	Rectangular 38" Canopy	Rectangular 22" Canopy 48" Canopy	Linear Track
System #				MQ-XXX	MD-XXX	MS-XXX	J1-XXX
Canopy #	XXX-SP2	XXX-SP5	C-MPR-XXX	C-MPS-XXX	C-MPT-XXX	C-MPL-XXX	


SKU	Watts						
INTEGRAL MOUNTED (Inside Fixture)							
PS-94ST-15W-27U-IN	15W	X					
PS-94ST-20W-27U-IN	20W		X	X	X		
PS-94ST-40W-27U-IN	40W		X	X	X		
PS-94ST-60W-27U-IN	60W		X	X	X		
PS-94ST-96W-27U-IN	96W		X	X	X		
CANOPY MOUNTED (Inside Mounting Canopy)							
PS-94ST-20W-27U-IC	20W					X	
PS-94ST-40W-27U-IC	40W					X	X
PS-94ST-40W-27U-IC	40W						X
PS-94SR-60W-27U-IC	60W					X	X
PS-94SR-96W-27U-IC	96W					X	X
PS-94ST-300-27U-IC	300W						X
REMOTE MOUNTED (Inside Remote Housing)							
PS-94ST-40W-27U-RE	40W	X	X	X	X	X	X
PS-94ST-60W-27U-RE	60W	X	X	X	X	X	X
PS-94ST-96W-27U-RE	96W	X	X	X	X	X	X
PS-94ST-300-27U-RE	300W						X

Remote Canopy Mounting Options

For additional information on mounting options and canopy sizes, please refer to other pages in this specification sheet.

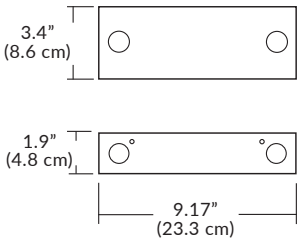

Remote Mounted Housing
(40W, 60W, or 96W Driver)

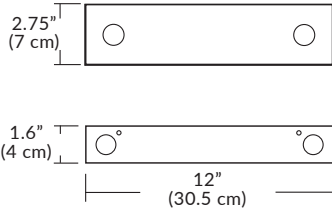

Remote Mounted Housing
(300W Driver)