

Features


- Standard Matte Black or Polished Chrome faceplate (w/Matte Black housing)
- Standard White faceplate (w/White housing)
- Canopy comes without pendants (ordered separately)
- When ordered with pendants, canopy ships with pendants assembled and pre-installed on canopy
- Fabricated steel construction
- Driver located in canopy housing
- Damp location rated

Specifications

- Input Voltage: 120-277 VAC, 50/60Hz
- Dimming: TRIAC / ELV / 0-10V dimmable
- For recommended dimmers, see blackjacklighting.com

Options


- Special order finishes available: BZ - Bronze, SG - Satin Gold, or SS - Satin Silver

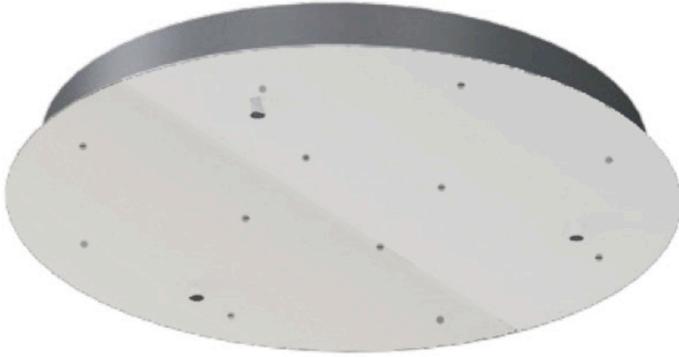

12-Port, White



Dimensions

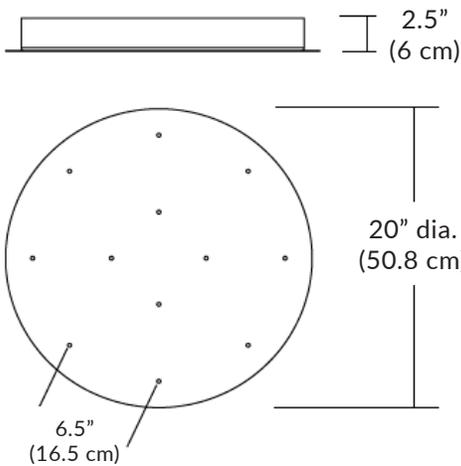

Driver Compatibility

PORTS	PENDANT WATTS	DRIVER
12	2W	40W
12	3W	40W
12	5W	96W



12-Port, Matte Black



12-Port, Polished Chrome




PENDANTS TO BE ORDERED SEPARATELY

ORDERING GUIDE



Family	Size/Type	Finish	Driver Location	Driver Watts
C-MPR	2012		UIN	
C-MPS Canopy Multi-Port Round	2012 20" Diameter 12 Ports	BL Matte Black PC Polished Chrome WH White Special Order BZ Bronze SG Satin Gold SS Satin Silver	UIN UIN Integral	40W 40 Watt Driver 60W 60 Watt Driver 96W 96 Watt Driver

Example: C-MPR-2012-BL-UIN-40W



LIGHT GUIDES - 2W / 86 LM






LIGHT GUIDES - 2W / 86 LM




NOVO TALL HIGH OUTPUT - 8W / 710 LM




NOVO TALL - 5W / 368 LM

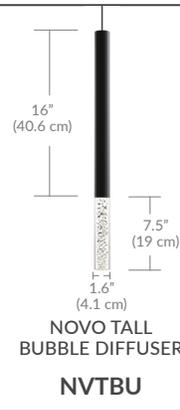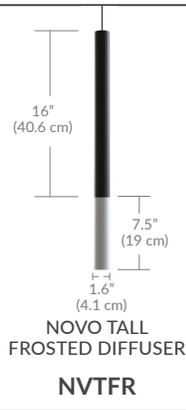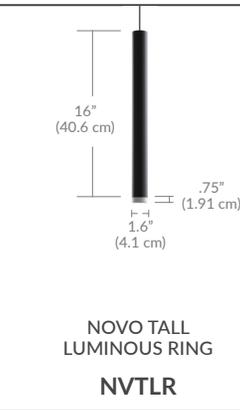




TALL CONE - 3W / 204 LM

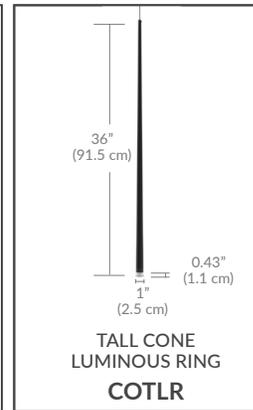



SHORT CONE - 5W / 397 LM

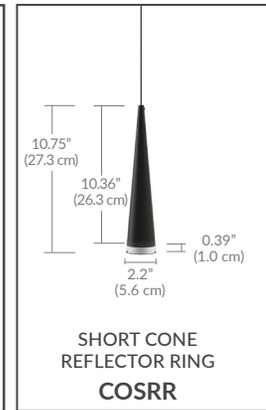

NOVO SHORT - 5W / 368 LM

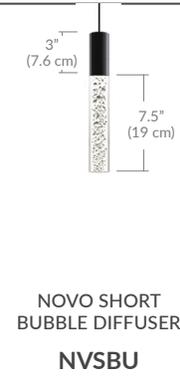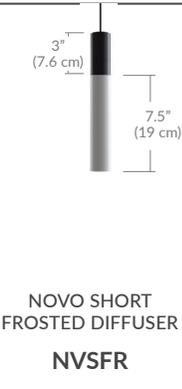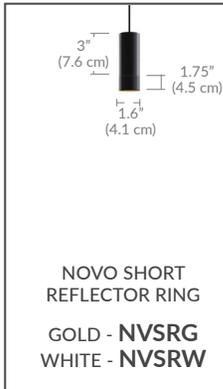

24" & 36" NOVO - 5W / 368 LM * (Can be used with any Novo Tall or Novo Short diffuser)

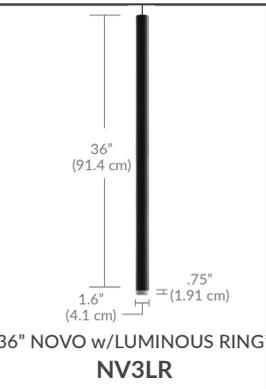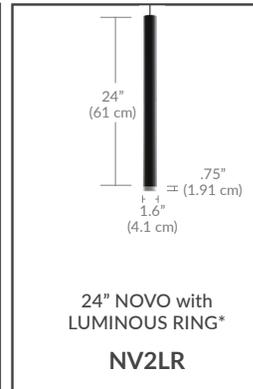

3" ACRYLIC GLOBES - 2W / 86 LM

2" (3.3 cm) | 3" (7.6 cm)

FROSTED ACRYLIC 3" GLOBE
GLSFR

CLEAR ACRYLIC 3" GLOBE
GLSCL

BUBBLE ACRYLIC 3" GLOBE
GLSBU

3" GLASS GLOBE - 2W / 147 LM

2.5" (6.4 cm) | 3" (7.6 cm)

WHITE GLASS 3" GLOBE
GGSWH

5" GLASS GLOBE - 3W / 238 LM

2.5" (6.4 cm) | 4.5" (11.5 cm)

WHITE GLASS 5" GLOBE
GGLWH

5" ACRYLIC GLOBE - 5W / 368 LM

3" (7.6 cm) | 4.25" (10.8 cm)

CLEAR ACRYLIC 5" GLOBE
GLLCL

8" GLASS SPHERE - 2W / 86 LM

8.5" (21.6 cm)

CLEAR 8" GLASS SPHERE - SPSCCL

12" GLASS SPHERE - 5W / 368 LM

12.8" (32.5 cm)

CLEAR 12" GLASS SPHERE - SPLCL

5" VELO - 2W / 86 LM

5" (12.7 cm) | 5.5" (14 cm)

CLEAR GLASS with BUBBLE - VELCB

12" WH GL SPHERE - 5W / 365 LM

12" (32 cm) dia.

WHITE 12" GLASS SPHERE - SPSPL

4" BULLET - 2W / 86 LM

4.5" (11.4 cm) | 3.5" (8.9 cm)

4" BULLET - BLACK w/COPPER INTERIOR
BL4BC

4" BULLET - WHITE w/GOLD INTERIOR
BL4WG

8" BULLET - 5W / 368 LM

9.5" (24.1 cm) | 7.5" (19 cm)

8" BULLET - WHITE w/GOLD INTERIOR
BL8WG

8" BULLET - BLACK w/COPPER INTERIOR
BL8BC

3" COLOR GEL - 2W / 86 LM

2" (5.08 cm) | 1" (2.5 cm) | 2.5" (6.35 cm)

RED COLOR GEL
CGLRD

BLUE COLOR GEL
CGLBL

GREEN COLOR GEL
CGLGN

10" PILLBOX - 12W / 680 LM

6.75" (17.1 cm) | 9.65" (24.5 cm)

10" PILLBOX WHITE w/GOLD INTERIOR
PBXWG

10" PILLBOX BLACK w/GOLD INTERIOR
PBXBG

10" PILLBOX BLACK w/WHITE INTERIOR
PBXBW

10" PILLBOX SATIN NICKEL w/WHITE INTERIOR
PBXSW

16" DOMOS - 12W / 680 LM

8" (20.3 cm) | 16" (40.6 cm)

16" DOMOS BLACK w/GOLD INTERIOR
DOMBG

16" DOMOS BLACK w/GOLD INTERIOR
DOMWG

16" DOMOS SATIN NICKEL w/WHITE INTERIOR
DOMSW

For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjacklighting.com.

Universal Drivers




Universal dimmable (TRIAC, ELV or 0-10V), Flicker-free dimming 100% to 2%, auto reset, short circuit, overload and thermal protection.
 Input Volts: 120-277V. Output Volts: 24V.

	SP2	SP5	Round	Quatro	Duo	Solo	JackTrack
Description	Round 2.5" Fascia Canopy	Round 5" Canopy	Round 10" Round 20" Canopies	Square 24" Canopy	Rectangular 38" Canopy	Rectangular 22" Canopy 48" Canopy	Linear Track
System #				MQ-XXX	MD-XXX	MS-XXX	J1-XXX
Canopy #	XXX-SP2	XXX-SP5	C-MPR-XXX	C-MPS-XXX	C-MPT-XXX	C-MPL-XXX	


SKU	Watts						
INTEGRAL MOUNTED (Inside Fixture)							
PS-94ST-15W-27U-IN	15W		X				
PS-94ST-20W-27U-IN	20W			X	X	X	
PS-94ST-40W-27U-IN	40W			X	X	X	
PS-94ST-60W-27U-IN	60W			X	X	X	
PS-94ST-96W-27U-IN	96W			X	X	X	
CANOPY MOUNTED (Inside Mounting Canopy)							
PS-94ST-20W-27U-IC	20W						X
PS-94ST-40W-27U-IC	40W						X
PS-94ST-40W-27U-IC	40W						X
PS-94SR-60W-27U-IC	60W						X
PS-94SR-96W-27U-IC	96W						X
PS-94ST-300-27U-IC	300W						X
REMOTE MOUNTED (Inside Remote Housing)							
PS-94ST-40W-27U-RE	40W	X		X	X	X	X
PS-94ST-60W-27U-RE	60W	X		X	X	X	X
PS-94ST-96W-27U-RE	96W	X		X	X	X	X
PS-94ST-300-27U-RE	300W						X

Remote Canopy Mounting Options

For additional information on mounting options and canopy sizes, please refer to other pages in this specification sheet.



Remote Mounted Housing
(40W, 60W, or 96W Driver)



Remote Mounted Housing
(300W Driver)