


## NANO 14" SCONCE

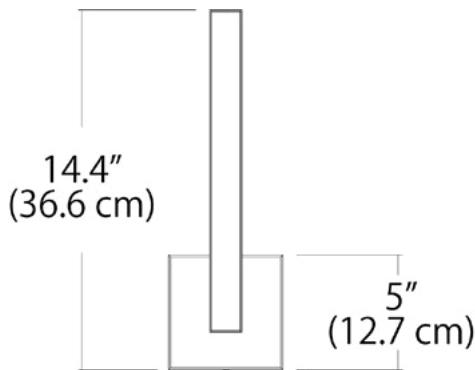

PROJECT:  SPECIFIER:   
SKU:  DATE:

### SPECIFICATIONS

Finish	Satin Nickel or Polished Chrome (Standard) Matte Black, Bronze, and Satin Gold (Special Order)
LED Color Temperature	3000K (standard) 2700K, 3500K, or 4000K also available
Fixture Wattage	14 Watts
Delivered Lumens	500 Lm (measured at 3000K)
Dimming	TRIAC Dimming (Standard) Universal (TRIAC, ELV, 0-10V) (Special Order)
Color Rendering Index	90CRI
Input Voltage	120VAC - 50/60Hz
Pendant Dimensions	14.4"H x 4.6"W x 2.8"D

### CUSTOM OPTIONS

See page 2 for finish and backplate options.



### ORDERING GUIDE

SIZE	FINISH	VOLTS / DIMMING	CCT	OUTPUT	BACKPLATE
<b>NAN</b>	<b>14S</b>	<b>Standard</b> SN - Satin Nickel PC - Polished Chrome	<b>Standard</b> 120VAC TRIAC Dimming	<b>SO</b> SO Standard Output	<b>DB</b> - Deep Backplate (Standard) (Driver located inside Backplate)
NAN Nano	14S 14" Sconce	Special Order BL - Matte Black BZ - Bronze SG - Satin Gold	Special Order 27U - 12-277VAC (0-10V Dimming)	(30K Standard)	<b>S4</b> - 4.6" Shallow Backplate (Special Order) (Driver located inside J-Box)

Example Part Number: NAN - 14S - SN - 12T - 30K - SO - S4

### Socket Color



SN - Satin Nickel



PC - Polished Chrome



BL - Matte Black



BZ - Bronze



SG - Satin Gold

Standard Finishes

Special Order Finishes

### Volts / Dimming

**27U:** Input: 120-277V , Dimming: TRIAC/ ELV/ 0-10V (Deep Backplate Only) **(Standard)**

**12T:** Input: 120V , Dimming: TRIAC **(Special Order)**

### Color Temperature


**27K:** 2700K

**30K:** 3000K **(Standard)**

**35K:** 3500K


**40K:** 4000K

### Backplates

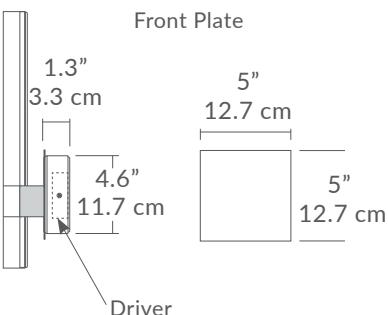

DB - Deep Backplate - (4.6"H , 4.6"W , 1.3"D)  
Driver located inside Backplate

**Standard Backplate**

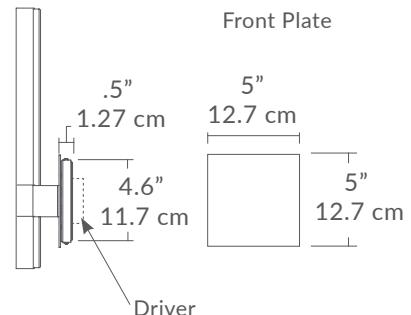

S4 - Shallow 4.6" Backplate - (4.6"H , 4.6"W , .5"D)  
Driver located inside J-Box

**Special Order Backplate**