NOVO HIGH OUTPUT PENDANT

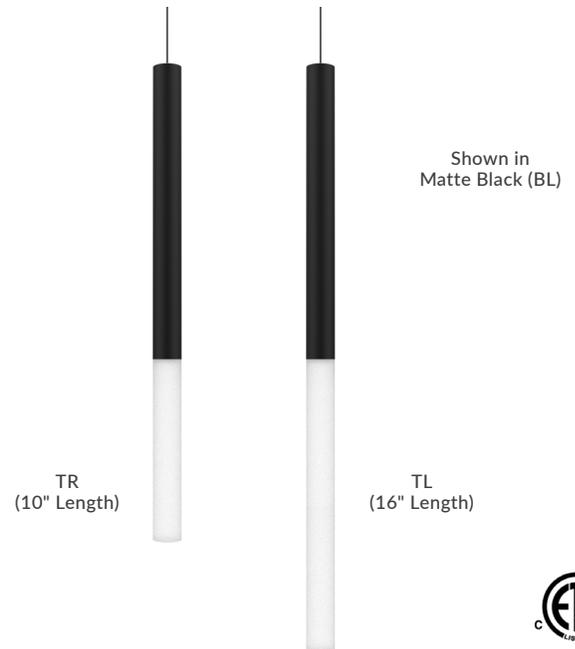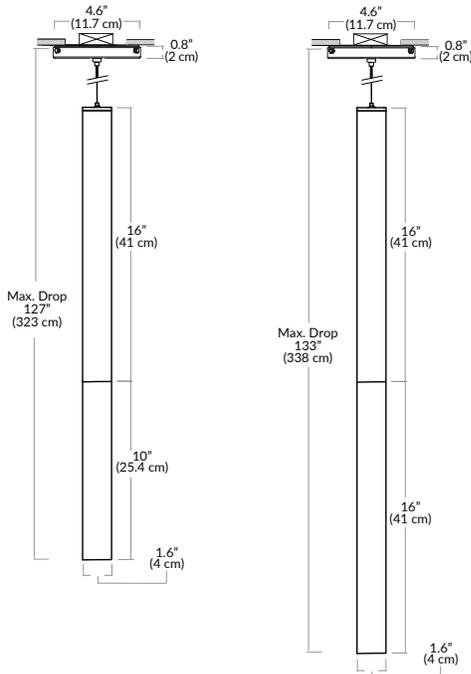## SPECIFICATIONS

Finish	Matte Black, White, or Polished Chrome
Diffuser	Translucent high grade acrylic
LED Color Temperature	3000K (standard) *2700K, 3500K, or 4000K also available*
Wattage	8 Watts / 710 Lumens
Driver Location	Integral in canopy, remote, or above canopy (depending on canopy selected)
Dimming	Universal (TRIAC, ELV, 0-10V)
Color Rendering Index	90CRI
Input Voltage	120-277V
Socket Dimensions	16"H x 1.6"Dia.
Cable Length	8' (for longer lengths, consult factory)

CUSTOM OPTIONS

See page 2 for socket finish and cord color options.

SP5 - 5" single canopy mounting option shown above. Additional mounting options on following pages.

4.6" (11.7 cm)
0.8" (2 cm)

16" (41 cm)

Max. Drop 127" (323 cm)

10" (25.4 cm)

1.6" (4 cm)

4.6" (11.7 cm)
0.8" (2 cm)

16" (41 cm)

Max. Drop 133" (338 cm)

16" (41 cm)

1.6" (4 cm)

Shown in Matte Black (BL)

TR (10" Length)

TL (16" Length)

ETL LISTED c us

ORDERING GUIDE

PRODUCT CODE ← | OPTIONS →

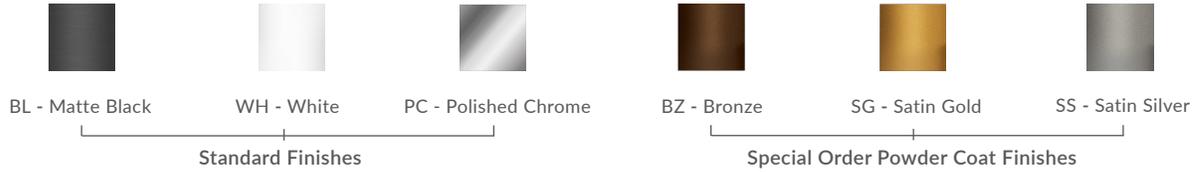| CATEGORY	SERIES	DIFFUSER	SIZE	SOCKET COLOR	CCT	WATTAGE	MOUNTING	CABLE LENGTH
SP	**NHT**		**02**			**8W**		
SP Small Pendant	NHT Novo High Output	**TR** 10" Length **TL** 16" Length	02 2" Diameter	**Standard** **BL** - Matte Black **WH** - White **PC** - Polished Chrome **Special Order** **BZ** - Bronze **SG** - Satin Gold **SS** - Satin Silver	**27K** - 2700K **30K** - 3000K **35K** - 3500K **40K** - 4000K (30K Standard)	8W 8 Watts / 710 Lm	**SP2** - 2.5" Canopy **SP5** - 5" Canopy **MPC** - Multi-Port Canopy **JTA** - JackTrack	Indicate Cable Length in Inches - leave blank for default **096** = 96" (default) **240** = 240" (max.)

Example Part Number: SP-NHT-TR-02-BL-30K-8W-SP5

BLACKJACK®
LIGHTING

Socket Color

| BL - Matte Black | WH - White | PC - Polished Chrome | BZ - Bronze | SG - Satin Gold | SS - Satin Silver |

Standard Finishes   **Special Order Powder Coat Finishes**

Wattage (Lumens measured at 3000K)
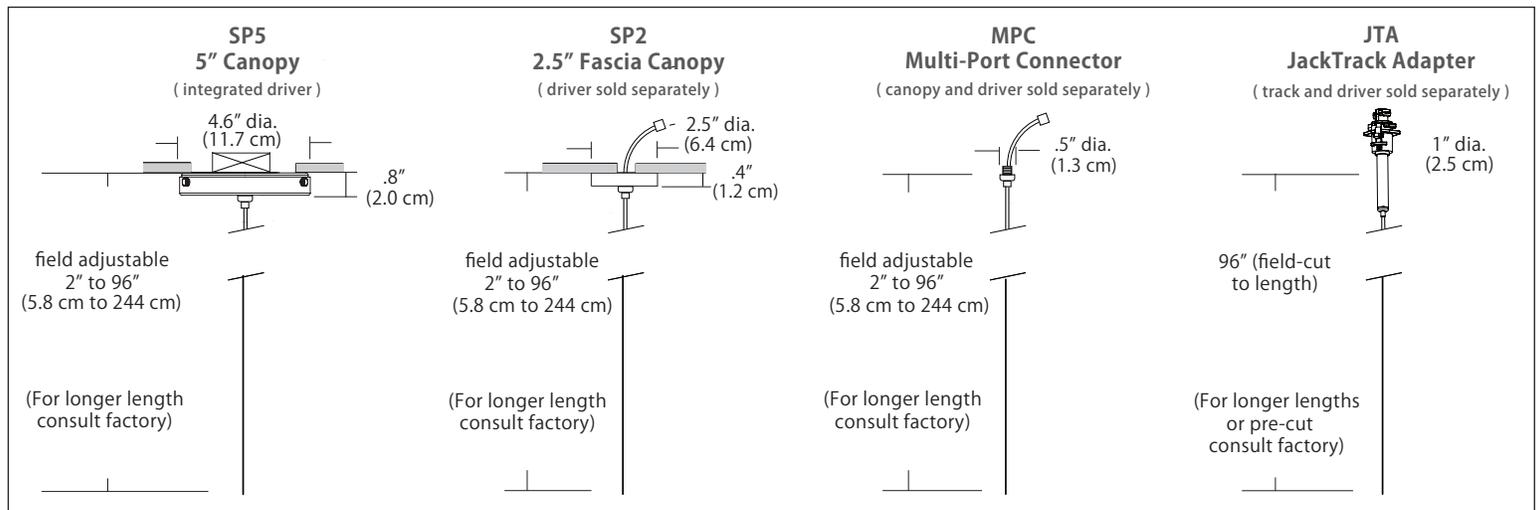
8W = 8 Watts / 710 Lumens

Mounting

SP5 = 5" round canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box
Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)

SP2 = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)
Cable with modular connector (and optional wire harness) attaches to a remote driver

MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately)
Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)
MPC options include:
   - Quatro, Duo, and Solo Modular Systems
   - Multi-Port canopies

JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately)
*Cable is cut to length and inserted in JackTrack adapter*

SP5 5" Canopy (integrated driver)	SP2 2.5" Fascia Canopy (driver sold separately)	MPC Multi-Port Connector (canopy and driver sold separately)	JTA JackTrack Adapter (track and driver sold separately)
4.6" dia. (11.7 cm) .8" (2.0 cm)	2.5" dia. (6.4 cm) .4" (1.2 cm)	.5" dia. (1.3 cm)	1" dia. (2.5 cm)
field adjustable 2" to 96" (5.8 cm to 244 cm)	field adjustable 2" to 96" (5.8 cm to 244 cm)	field adjustable 2" to 96" (5.8 cm to 244 cm)	96" (field-cut to length)
(For longer length consult factory)	(For longer length consult factory)	(For longer length consult factory)	(For longer lengths or pre-cut consult factory)

Cable Length

096 = 96" (Default Length).

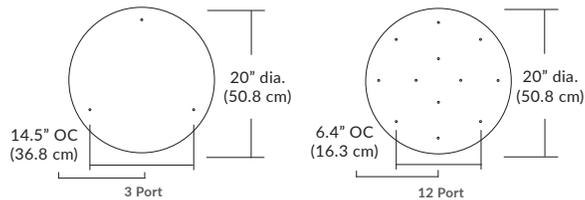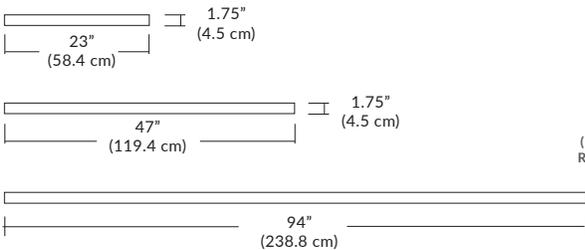**XXX** = Custom Length (240" = maximum length)

For Custom Lengths, please indicate length in inches.

BLACKJACK LIGHTING®

For more information on Quatro, Duo, or Solo Modular Systems, JackTrack, or Multi-Port Canopies, see blackjacklighting.com.

| Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	**5" Canopy** Canopy and driver included with pendant	5" dia. (12.7 cm)	.8" (2 cm) (Integrated Driver)	**BL** Matte Black **PC** Pol. Chrome **WH** White **SG** Satin Gold **BZ** Bronze **SS** Satin Silver
SP2	**2.5" Fascia Canopy** Canopy included with pendant. Driver sold separately.	2.5" dia. (6.4 cm)	.4" (1.3 cm) (Remote Driver required)	
MPC	**24" Multi-Port Square - 9 Port** C-MPS-2409-# MQ-2409-# **24" Multi-Port Square - 25 Port** C-MPS-2425-# MQ-2425-#	8" OC (20.3 cm) 4.8" OC (12.2 cm) 23.9" (60.7 cm) 23.9" (60.7 cm) 9 Port 25 Port	21.5" 54.6 cm 2.5" (6 cm) (Integrated or Remote Driver)	**BL** Matte Black **PC** Pol. Chrome **WH** White **SG** Satin Gold **BZ** Bronze **SS** Satin Silver
MPC	**38" Multi-Port Rectangle - 10 Port** C-MPT-3810-# MD-3810-# **38" Multi-Port Rectangle - 18 Port** C-MPT-3818-# MD-3818-#	7.5" OC (19 3" OC (7.6 cm) 10 Port 37.7" (97.8 cm) 4.1" OC (10.4 cm) 2.5" OC (6.4 cm) 18 Port 37.7" (97.8 cm)	4.7" 11.9 cm 2.5" (6 cm) 6" 15.2 cm (Integrated or Remote Driver)	**BL** Matte Black **PC** Pol. Chrome **WH** White **SG** Satin Gold **BZ** Bronze **SS** Satin Silver
MPC	**22" Multi-Port Linear - 5 Port** C-MPL-2205-# MS-2205-# **48" Multi-Port Linear - 11 Port** C-MPL-4811-# MS-4811-#	4.4" OC (11.2 cm) 2.8" (7 cm) 5 Port 21.8" (56 cm) 4.4" OC (11.2 cm) 2.8" (7 cm) 11 Port 48" (123 cm)	2.8" (7 cm) 1.4" (4 cm) (Integrated or Remote Driver)	**BL** Matte Black **WH** White **SG** Satin Gold **BZ** Bronze **SS** Satin Silver
MPC	**10" Round - 3 Port** C-MPR-1003-# **10" Round - 9 Port** C-MPR-1009-#	11" dia. (27.9 cm) 11" dia. (27.9 cm) 7.4" OC (18.8 cm) 2.9" OC (7.4 cm) 3 Port 9 Port	10" dia. (25.4 cm) 2.1" (5.3 cm) (Integrated Driver)	**BL** Matte Black **PC** Pol. Chrome **WH** White **SG** Satin Gold **BZ** Bronze **SS** Satin Silver
MPC	**20" Round - 3 Port** C-MPR-2003-# **20" Round - 12 Port** C-MPR-2012-#	20" dia. (50.8 cm) 20" dia. (50.8 cm) 14.5" OC (36.8 cm) 6.4" OC (16.3 cm) 3 Port 12 Port	18" dia. 45.7 cm 2.5" (6 cm) (Integrated Driver)	**BL** Matte Black **PC** Pol. Chrome **WH** White **SG** Satin Gold **BZ** Bronze **SS** Satin Silver
JTA	**24" JackTrack** J1-XXXX-XX-CH024 **48" JackTrack** J1-XXXX-XX-CH048 **94" JackTrack** J1-XXXX-XX-CH094	1.75" (4.5 cm) 23" (58.4 cm) 1.75" (4.5 cm) 47" (119.4 cm) 1.75" (4.5 cm) 94" (238.8 cm)	1.38" (3.5 cm) 1.75" (4.5 cm) (Integrated or Remote Driver)	**BL** Matte Black **WH** White
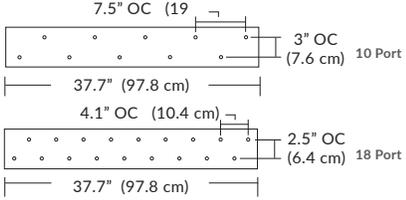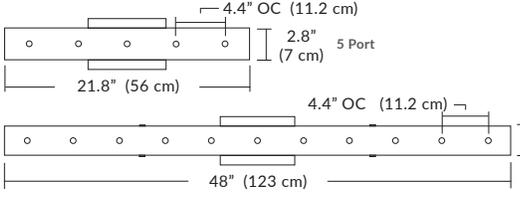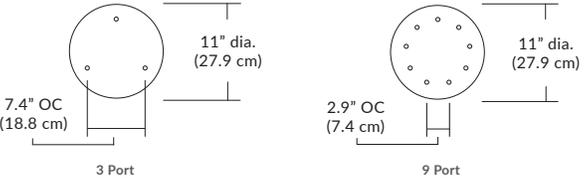
BLACKJACK® LIGHTING

For more information on Quatro, Duo, or Solo Modular Systems, JackTrack, or Multi-Port Canopies, see blackjacklighting.com.

System	Pendant Mounting	Configuration Examples	Finish Options

Quatro

Square Configurations

48" (122 cm)

8" OC (20.3 cm)

4S (4' 2x2 / 9 Port)
MQ-2409-XX-4S-X-XXK

72" (182.9 cm)

4.8" OC (12.2 cm)
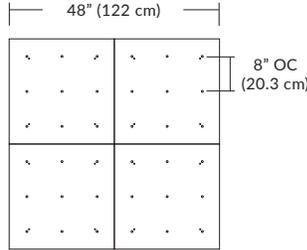
6S (6' 3x3 / 25 Port)
MQ-2425-XX-6S-X-XXK

BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver

Linear Configurations

48" (122 cm)

23.9" (60.7 cm)
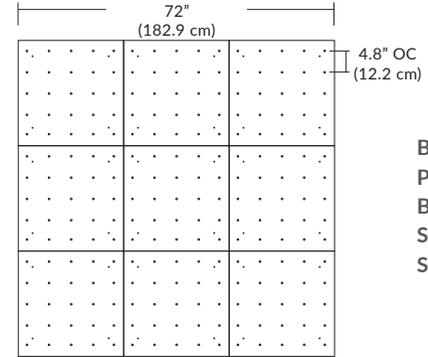
4L (4'x2' / 9 Port)
MQ-2425-XX-4L-X-XXK

72" (183 cm)

23.9" 60.7 cm
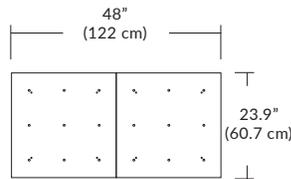
6L (6'x2' / 25 Port)
MQ-2425-XX-6L-X-XXK
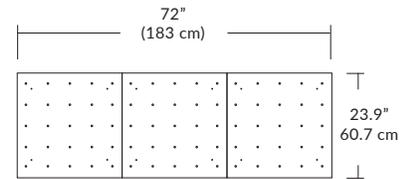
Additional configurations and options available. Contact factory for details.

Duo

Linear Configurations
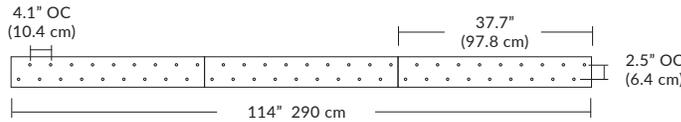
6L (6'4"x6" / 10 Port)
MD-3810-XX-6L-X-XXK

37.7" (97.8 cm)   7.5" OC (19 cm)

3" OC (7.6 cm)

76" (193 cm)
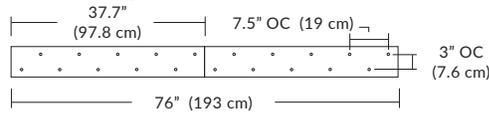
9L (9'6"x6"/ 18 Port)
MD-3818-XX-9L-X-XXK

4.1" OC (10.4 cm)

37.7" (97.8 cm)

2.5" OC (6.4 cm)

114" 290 cm

BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver

Additional configurations and options available. Contact factory for details.
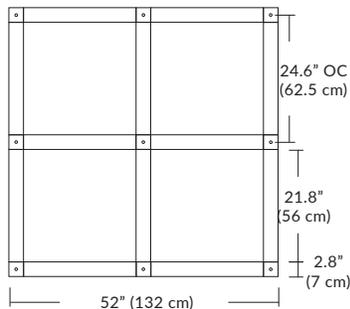
Solo
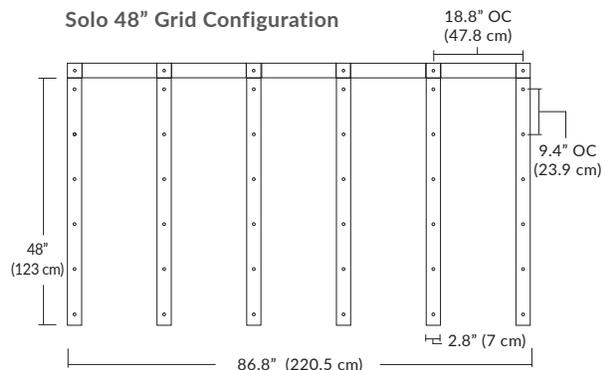
Solo 48" Linear Configuration

48" (123 cm)   4.4" OC (11.2 cm)

2.8" (7 cm)

96" (243.8 cm)

Solo (L) Configuration

2.8" (7 cm)

2.8" (7 cm)

96" (243.8 cm)
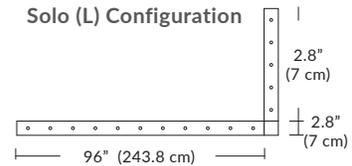
Solo 22" Grid Configuration

24.6" OC (62.5 cm)

21.8" (56 cm)

2.8" (7 cm)

52" (132 cm)

Solo 48" Grid Configuration

18.8" OC (47.8 cm)

48" (123 cm)

9.4" OC (23.9 cm)

2.8" (7 cm)

86.8" (220.5 cm)

BL Matte Black
WH Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver

Additional configurations and options available. Contact factory for details.