

SURFACE MOUNT NOVO SHORT


SP2 CANOPY

(DRIVER SOLD SEPARATELY)

SP5 CANOPY

(INTEGRATED DRIVER)

LR - LUMINOUS RING

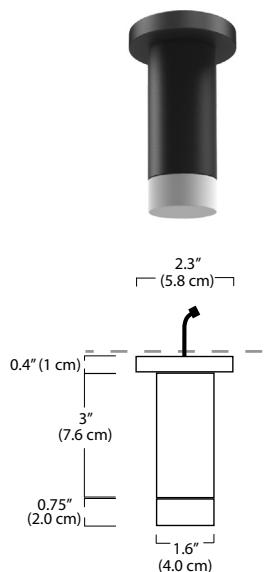

RG - REFLECTOR RING w/GOLD INTERIOR (shown)
 RW - REFLECTOR RING w/WHITE INTERIOR



ORDERING GUIDE


SIZE	DIFFUSER	FINISH	COLOR TEMP.	WATTAGE	MOUNTING
SNS	LR - Luminous Ring	BL - Matte Black	27K - 2700K	5W	SP2 - 2" Canopy
	RG - Reflector Ring w/Gold Interior	WH - White	30K - 3000K		SP5 - 5" Canopy
	RW - Reflector Ring w/White Interior	PC - Polished Chrome	35K - 3500K		
			40K - 4000K		
			(30K Default)		

Example: SNS - LR - 02 - BL - 30K - 5W - SP5

Socket Finish



Reflector Ring Interior Finish



Wattage (Lumens measured at 3000K)

5W = 5 Watts / 365 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).

Mounting

SP2 = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)

Cable with modular connector (and optional wire harness) attaches to a remote driver

SP5 = 5" round canopy with integral universal driver (120-277V / TRIAC, ELV, 0-10V dimming, included), attaches to rear of canopy and sits inside ceiling mounted junction box

