


## SURFACE-MOUNT NOVO TALL

### SP2 CANOPY


(DRIVER SOLD SEPARATELY)

RG - REFLECTOR RING w/GOLD INTERIOR (shown)  
 RW - REFLECTOR RING w/WHITE INTERIOR

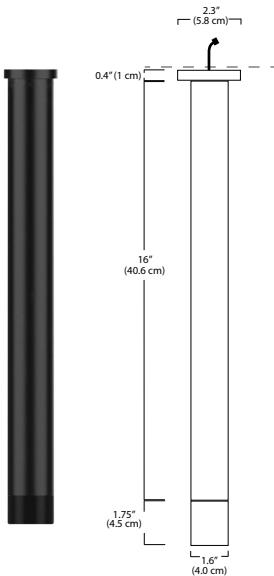


### SP5 CANOPY

(INTEGRATED DRIVER)

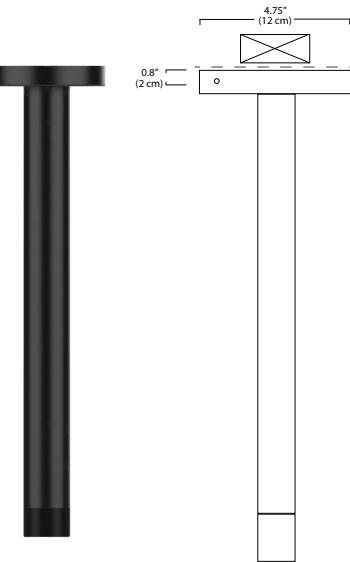

### LR - LUMINOUS RING

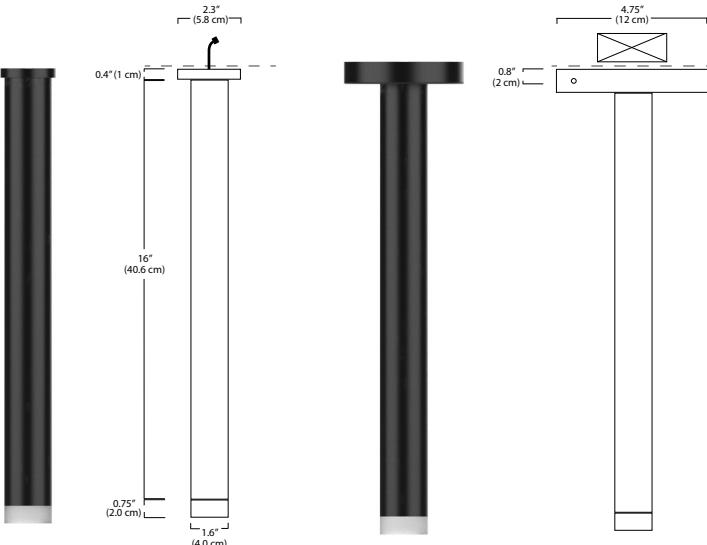


## SPECIFICATIONS

COLOR RENDERING INDEX	90 CRI
FINISHES	Black (BL), White (WH), or Polished Chrome (PC)
DIMMING	TRIAC/ELV/0-10
COLOR TEMP.	27K, 30K, 35K, 40K (30K Default)
Fixture Wattage	5W
INPUT VOLTAGE	120-277 VAC
LUMENS (measured at 3000K)	365 Lm
Fixture Weight	1.0 lb. (0.45 kg)

## FEATURES

- Stamped steel canopy, fabricated acrylic light guide
- Damp location rated
- SP2 Canopy includes 8' of coaxial cable - connects to remote driver (not included)
- SP5 Canopy includes integral universal driver mounted to top of canopy

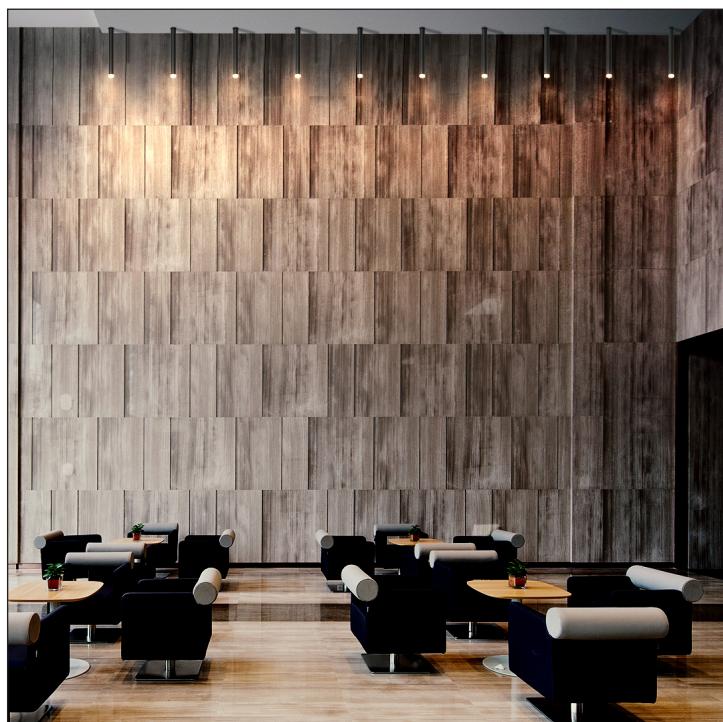

## ORDERING GUIDE

SERIES	DIFFUSER	SIZE	FINISH	COLOR TEMP.	WATTAGE	MOUNTING
SNT	LR - Luminous Ring	02	BL - Matte Black	27K - 2700K	5W	SP2 - 2" Canopy
SNT - Surface Novo Tall	RG - Reflector Ring w/Gold Interior	02 - 2" Diameter	WH - White	30K - 3000K	5W - 5 Watts	SP5 - 5" Canopy
	RW - Reflector Ring w/White Interior		PC - Polished Chrome	35K - 3500K		
				40K - 4000K		
				(30K Default)		

Example: SNT - LR - 02 - BL - 30K - 5W - SP5

### Socket Color



BL - Matte Black



WH - White



PC - Polished Chrome

Standard Finishes

### Reflector Ring Interior Color



G - Gold



W - White

Standard Finishes

### Wattage (Lumens measured at 3000K)

**5W** = 5 Watts / 365 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).

### Mounting

**SP2** = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)

*Cable with modular connector (and optional wire harness) attaches to a remote driver*

**SP5** = 5" round canopy with integral universal driver (120-277V / TRIAC, ELV, 0-10V dimming, included), attaches to rear of canopy and sits inside ceiling mounted junction box

