



## QUATRO MODULAR SYSTEM



### SPECIFICATIONS

Standard Finishes	Matte Black (BL), White (WH), or Polished Chrome (PC)
Custom Finishes	Bronze (BZ), Satin Gold (SG), or Satin Silver (SS)
Input Voltage	120-277VAC - Low Voltage 24V canopy system
CCT Options	2700K, 3000K, 3500K, or 4000K
Wattage	Available with 20W, 40W, 60W, or 96W driver options
Dimming	Universal (TRIAC / ELV / 0-10V)

- Canopies link together and can be ordered with almost any pendant and configuration
- Pendants ship pre-assembled to canopy, with cable lengths pre-set to a selected design pattern
- Fabricated steel construction
- Powder coated paint finishes
- Driver located in canopy housing (standard)
- Damp location rated

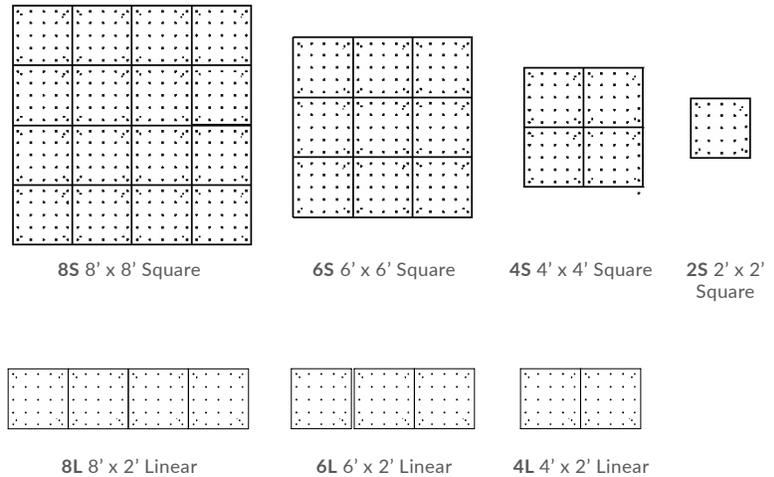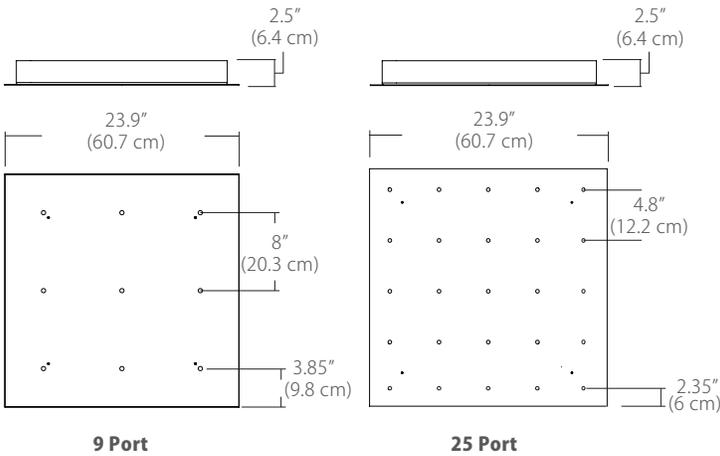

### ORDERING GUIDE

PRODUCT CODE							OPTIONS	
SYSTEM	CANOPY	FINISH	PENDANT	CONFIGURATION	PATTERN	COLOR TEMPERATURE	CABLE LENGTH	POWER SUPPLY
<b>MQ</b>								
MQ Quatro Modular System	2409 24" - 9-Port 2425 24" - 25-Port 24XX 24" - Custom-Port	Standard BL - Matte Black WH - White PC - Polished Chrome  Special Order BZ - Bronze SG - Satin Gold SS - Satin Silver Other CS Customer Specification	See pages 3 and 4 for pendant options	Square 2S 2' x 2' Square 4S 4' x 4' Square 6S 6' x 6' Square 8S 8' x 8' Square Linear 4L 4' x 2' Linear 6L 6' x 2' Linear 8L 8' x 2' Linear Other CS Customer Specification	B - Stepped L - Level P - Pyramid R - Random S - Stepped U - Surface W - Wave Y - Customer Set Z - Customer Specification	27K 2700K 30K 3000K 35K 3500K 40K 4000K	Indicate Cable Length in Inches - leave blank for default 096 = 96" (default) 300 = 300" (max.)	U - Universal Integral (standard) (Leave blank for standard option) R - Remote

Example Part Number: MQ - 2409 - BL - GLSFR - 6L - L - 30K - 144 - R

## 4S - 4' Square



9 Port with 8" Clear Glass Sphere in Random Pattern  
MQ-2409-PC-SPSCL-4S-R



25 Port with Short Frosted in Level Pattern  
MQ-2425-PC-LGDSF-4S-L

## 4L - 4' Linear




9 Port with Clear 5" Velo in Level Pattern  
MQ-2409-BL-VELCB-2L-L




25 Port w/Short Frosted in Stepped Pattern  
MQ-2425-BL-LGDSF-2L-B

## 6S - 6' Square



9 Port with 5" White Globes in Random Pattern  
MQ-2409-PC-GGSWH-6S-R



9 Port with 5" White Globes in Level Pattern  
MQ-2409-PC-GGSWH-6S-L

## 6L - 6' Linear




9 Port with 8" Glass Spheres in Random Pattern  
MQ-2409-BL-SPSCL-6L-R



25 Port with Short Frosted in Random Pattern  
MQ-2425-BL-LGDSF-6L-R

## 8S - 8' Square




9 Port with 3" Frosted Globes in Level Pattern  
MQ-2409-PC-GLSFR-8S-L




25 Port with Short Frosted in Random Pattern  
MQ-2425-PC-LLGDSF-8S-R

## 8L - 8' Linear



9 Port with 3" Frosted Globes in Wave Pattern  
MQ-2409-BL-GLSFR-8L-W








25 Port with Short Frosted in Customer Specification  
MQ-2409-BL-LGDSF-8L-Z


# BLACKJACK® LIGHTING

Pendants available separately. For full specifications and ordering information, see <http://blackjacklighting.com>

## LIGHT GUIDE - 2W / 86 LM



## 3" ACRYLIC GLOBE - 2W / 86 LM



## 3" GLASS GLOBE - 2W / 147 LM







## 5" GLASS GLOBE - 3W / 238 LM




## 5" ACRYLIC GLOBE - 5W / 368 LM



## NOVO TALL - 5W / 368 LM

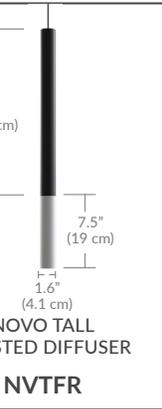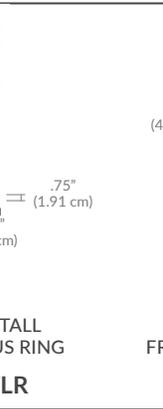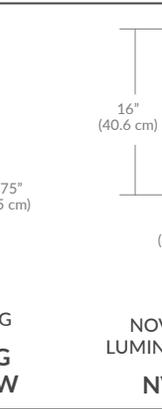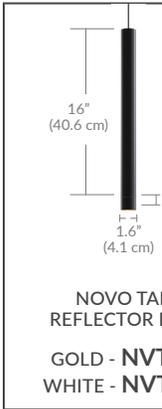



## TALL CONE - 3W / 204 LM

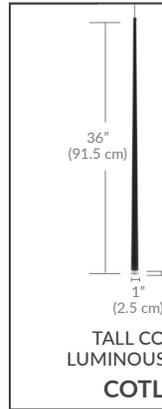



## SHORT CONE - 5W / 397 LM



## NOVO SHORT - 5W / 368 LM

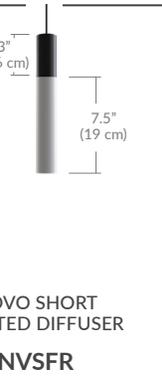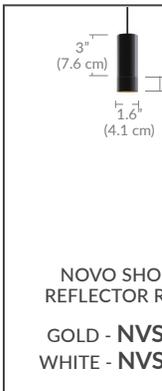

## 24" & 36" NOVO - 5W / 368 LM \* (Can be used with any Novo Tall or Novo Short diffuser)

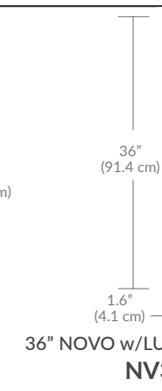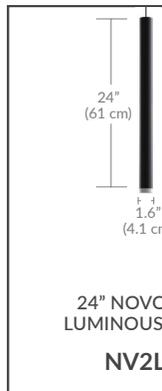

# BLACKJACK® LIGHTING

Pendants available separately. For full specifications and ordering information, see <http://blackjacklighting.com>

8" GLASS SPHERE - 2W / 86 LM



12" GLASS SPHERE - 5W / 368 LM



5" VELO - 2W / 86 LM



4" BULLET - 2W / 86 LM



8" BULLET - 5W / 368 LM



3" COLOR GEL - 2W / 86 LM



10" PILLBOX - 12W / 680 LM




16" DOMOS - 12W / 680 LM




## Fixture Wiring Example (6S Configuration/ Integral Driver)

For custom configuration contact BlackJack Lighting.  
Illustrations are for reference only.

### Bottom view with front covers removed

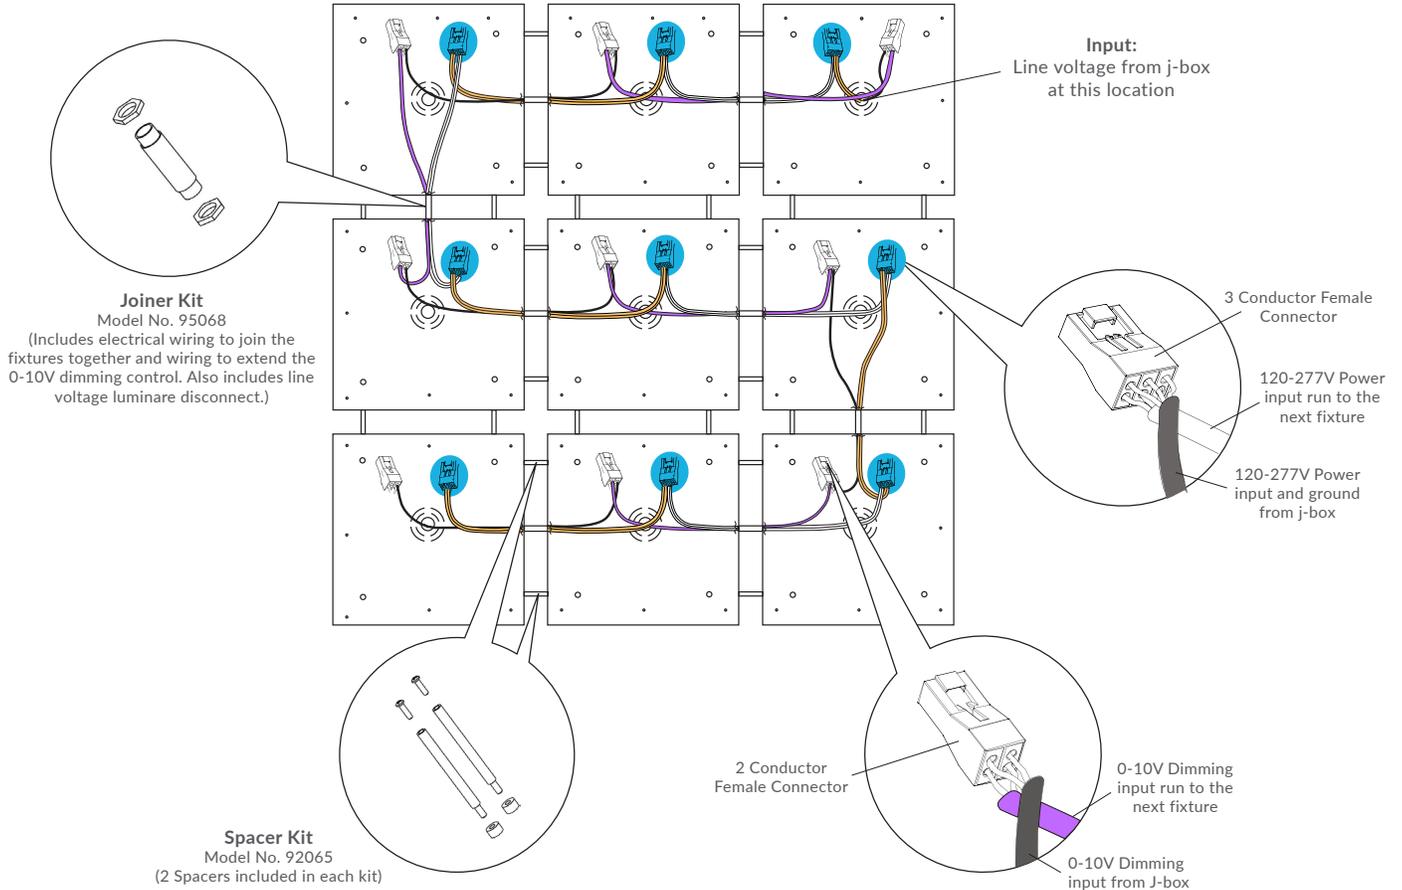


### Section Through Fixture (before final attachment)

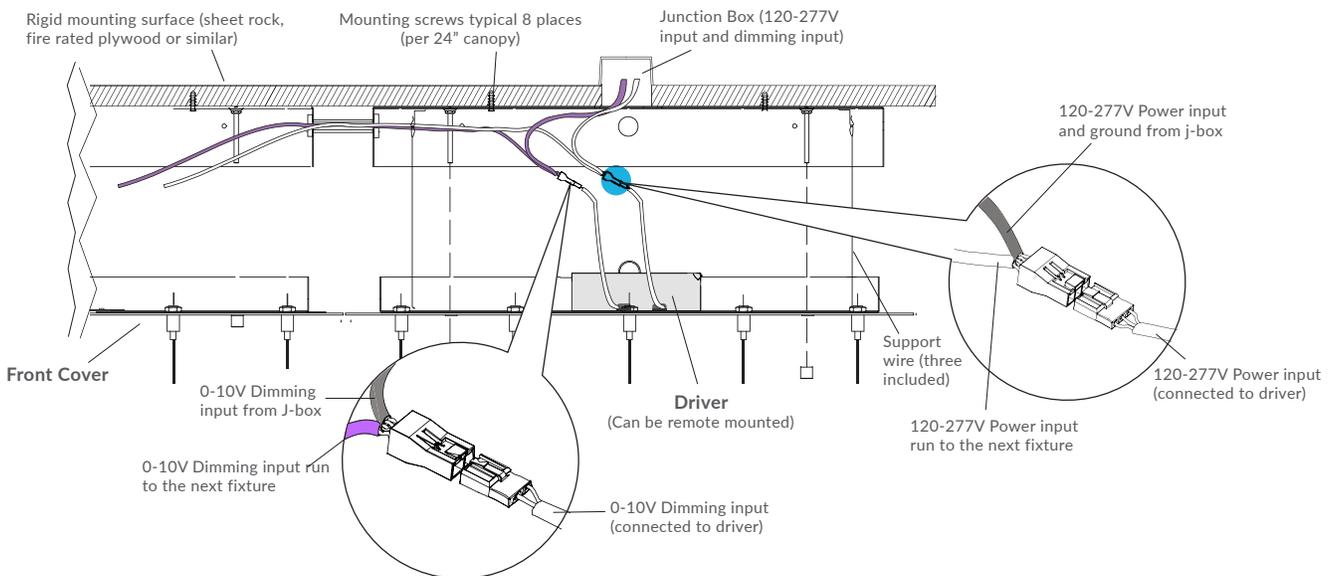


## Fixture Wiring Example (6S Configuration/ Remote Driver)

For custom configuration contact BlackJack Lighting.  
Illustrations are for reference only.

Bottom view with front covers removed

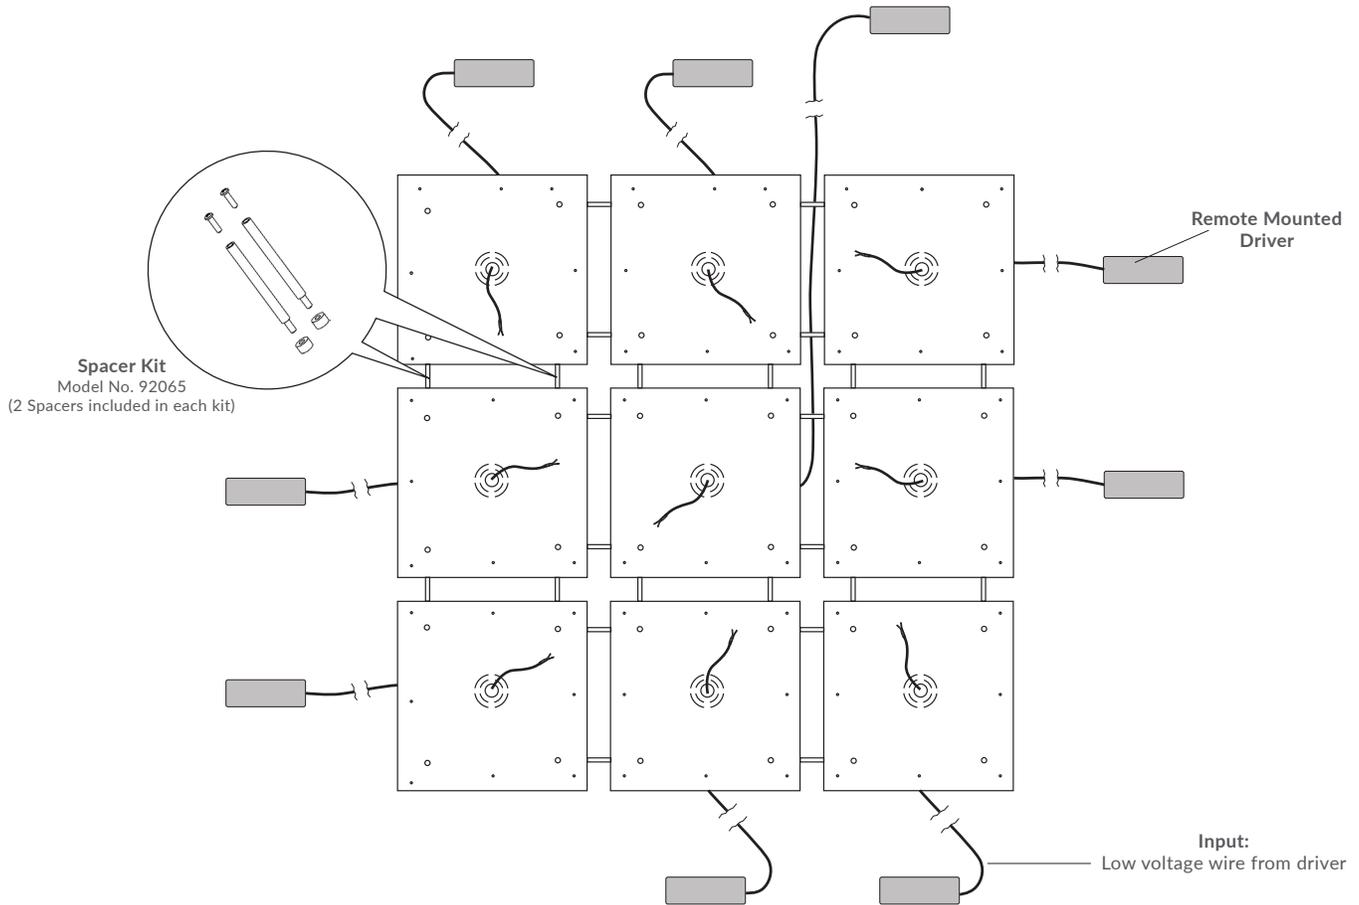

Section Through Fixture (before final attachment)

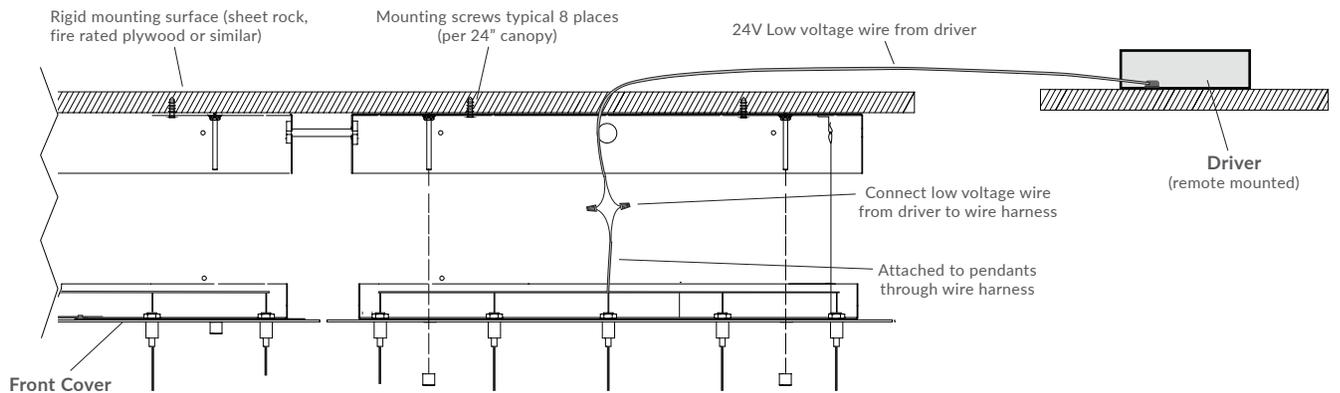

For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see [blackjacklighting.com](http://blackjacklighting.com).

## Universal Drivers




Universal dimmable (TRIAC, ELV or 0-10V), Flicker-free dimming 100% to 2%, auto reset, short circuit, overload and thermal protection.  
 Input Volts: 120-277V. Output Volts: 24V.

	SP2	SP5	Round	Quatro	Duo	Solo	JackTrack
<b>Description</b>	Round 2.5" Fascia Canopy	Round 5" Canopy	Round 10" Round 20" Canopies	Square 24" Canopy	Rectangular 38" Canopy	Rectangular 22" Canopy 48" Canopy	Linear Track
<b>System #</b>				MQ-XXX	MD-XXX	MS-XXX	J1-XXX
<b>Canopy #</b>	XXX-SP2	XXX-SP5	C-MPR-XXX	C-MPS-XXX	C-MPT-XXX	C-MPL-XXX	


SKU	Watts						
<b>INTEGRAL MOUNTED (Inside Fixture)</b>							
PS-94ST-15W-27U-IN	15W		X				
PS-94ST-20W-27U-IN	20W			X	X	X	
PS-94ST-40W-27U-IN	40W			X	X	X	
PS-94ST-60W-27U-IN	60W			X	X	X	
PS-94ST-96W-27U-IN	96W			X	X	X	
<b>CANOPY MOUNTED (Inside Mounting Canopy)</b>							
PS-94ST-20W-27U-IC	20W						X
PS-94ST-40W-27U-IC	40W						X
PS-94ST-40W-27U-IC	40W						X
PS-94SR-60W-27U-IC	60W						X
PS-94SR-96W-27U-IC	96W						X
PS-94ST-300-27U-IC	300W						X
<b>REMOTE MOUNTED (Inside Remote Housing)</b>							
PS-94ST-40W-27U-RE	40W	X		X	X	X	X
PS-94ST-60W-27U-RE	60W	X		X	X	X	X
PS-94ST-96W-27U-RE	96W	X		X	X	X	X
PS-94ST-300-27U-RE	300W						X

## Remote Canopy Mounting Options

For additional information on mounting options and canopy sizes, please refer to other pages in this specification sheet.



Remote Mounted Housing  
(40W, 60W, or 96W Driver)



Remote Mounted Housing  
(300W Driver)