



## SURFACE MOUNT ACRYLIC GLOBE SMALL - BUBBLE DIFFUSER



**SP2 CANOPY**  
MOUNTING OPTION  
(DRIVER SOLD SEPARATELY)



**SP5 CANOPY**  
MOUNTING OPTION  
(INTEGRATED DRIVER)

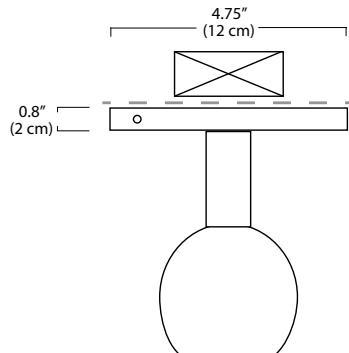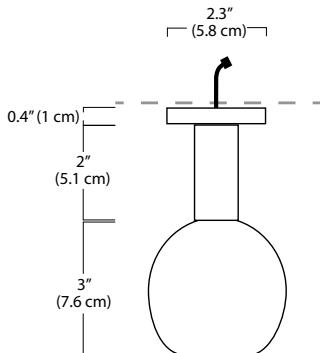


### SPECIFICATIONS

COLOR RENDERING INDEX	90 CRI
FINISHES	Black (BL), White (WH), or Polished Chrome (PC)
DIMMING	TRIAC/ELV/0-10
COLOR TEMP.	27K, 30K, 35K, 40K (30K Default)
Fixture Wattage	3W
INPUT VOLTAGE	120-277 VAC
LUMENS (measured at 3000K)	135
Fixture Weight	1.0 lb. (0.45 kg)

### FEATURES

- Stamped steel canopy, fabricated acrylic light guide
- Damp location rated
- SP2 Canopy includes 12' of coaxial cable (not field adjustable)
- SP5 Canopy includes 6" of 2-conductor cable (not field adjustable)

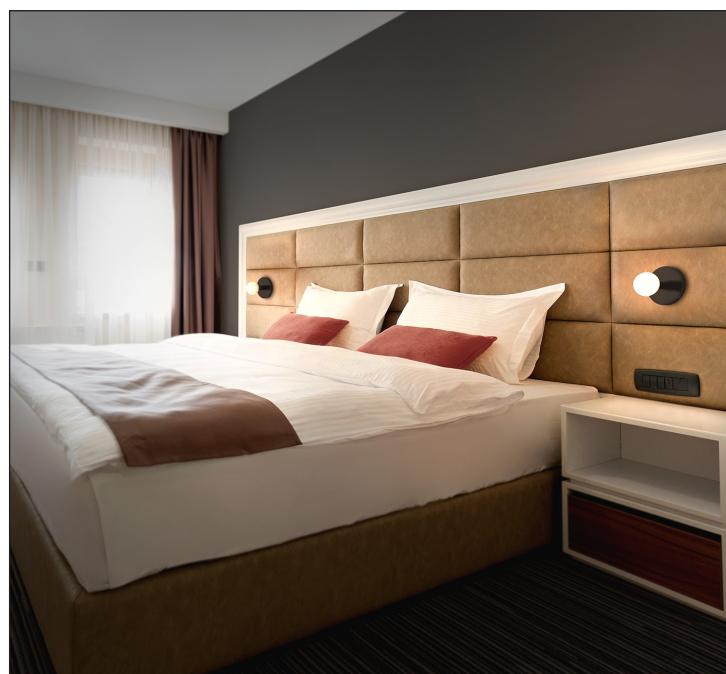

### ORDERING GUIDE

SERIES	DIFFUSER	SIZE	FINISH	COLOR TEMP.	WATTAGE	MOUNTING
SGS	BU	03			3W	
SGS - Surface Globe Small	BU - Bubble Acrylic Globe	03 - 3" Diameter	BL - Matte Black WH - White PC - Polished Chrome	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K (30K Default)	3W - 3 Watts	SP2 - 2" Canopy SP5 - 5" Canopy
Example: SGS - BU - 03 - BL - 30K - 5W - SP5						

### Socket Color



BL - Matte Black



WH - White



PC - Polished Chrome

Standard Finishes

### Wattage (Lumens measured at 3000K)

**3W** = 3 Watts / 135 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).

### Mounting

**SP2** = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)

*Cable with modular connector (and optional wire harness) attaches to a remote driver*

**SP5** = 5" round canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box

*Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)*

