


SURFACE MOUNT ACRYLIC GLOBE SMALL - FROSTED DIFFUSER



SP2 CANOPY
MOUNTING OPTION
(DRIVER SOLD SEPARATELY)

SP5 CANOPY
MOUNTING OPTION
(INTEGRATED DRIVER)

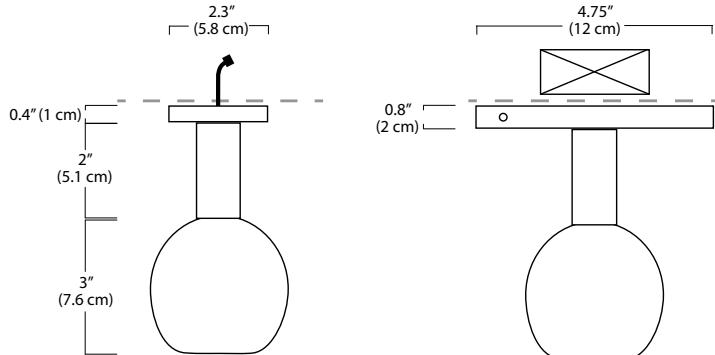

SPECIFICATIONS

COLOR RENDERING INDEX	90 CRI
FINISHES	Black (BL), White (WH), or Polished Chrome (PC)
DIMMING	TRIAC/ELV/0-10
COLOR TEMP.	27K, 30K, 35K, 40K (30K Default)
Fixture Wattage	3W
INPUT VOLTAGE	120-277 VAC
LUMENS (measured at 3000K)	135
Fixture Weight	1.0 lb. (0.45 kg)

FEATURES

- Stamped steel canopy, fabricated acrylic light guide
- Damp location rated
- SP2 Canopy includes 12' of coaxial cable (not field adjustable)
- SP5 Canopy includes 6" of 2-conductor cable (not field adjustable)



ORDERING GUIDE

SERIES	DIFFUSER	SIZE	FINISH	COLOR TEMP.	WATTAGE	MOUNTING
SGS	FR	03			3W	
SGS - Surface Globe Small	FR - Frosted Acrylic Globe	03 - 3" Diameter	BL - Matte Black WH - White PC - Polished Chrome	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K (30K Default)	3W - 3 Watts	SP2 - 2" Canopy SP5 - 5" Canopy
Example: SGS - FR - 03 - BL - 30K - 5W - SP5						

Socket Color



BL - Matte Black



WH - White



PC - Polished Chrome

Standard Finishes

Wattage (Lumens measured at 3000K)

3W = 3 Watts / 135 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).

Mounting

SP2 = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)

Cable with modular connector (and optional wire harness) attaches to a remote driver

SP5 = 5" round canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box

Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)

