



SURFACE-MOUNT LIGHT GUIDE - MUSHROOM DIFFUSER



SP2 CANOPY
MOUNTING OPTION
(DRIVER SOLD SEPARATELY)



SP5 CANOPY
MOUNTING OPTION
(INTEGRATED DRIVER)




SPECIFICATIONS

| | |
|----------------------------|---|
| COLOR RENDERING INDEX | 90 CRI |
| FINISHES | Black (BL), White (WH), or Polished Chrome (PC) |
| DIMMING | TRIAC/ELV/0-10 |
| COLOR TEMP. | 27K, 30K, 35K, 40K (30K Default) |
| Fixture Wattage | 3W |
| INPUT VOLTAGE | 120-277 VAC |
| LUMENS (measured at 3000K) | 133 Lm |
| Fixture Weight | 1.0 lb. (0.45 kg) |

FEATURES

- Stamped steel canopy, acrylic light guide
- Damp location rated
- SP2 Canopy includes 8' of coaxial cable - connects to remote driver (not included)
- SP5 Canopy includes integral universal driver mounted to top of canopy

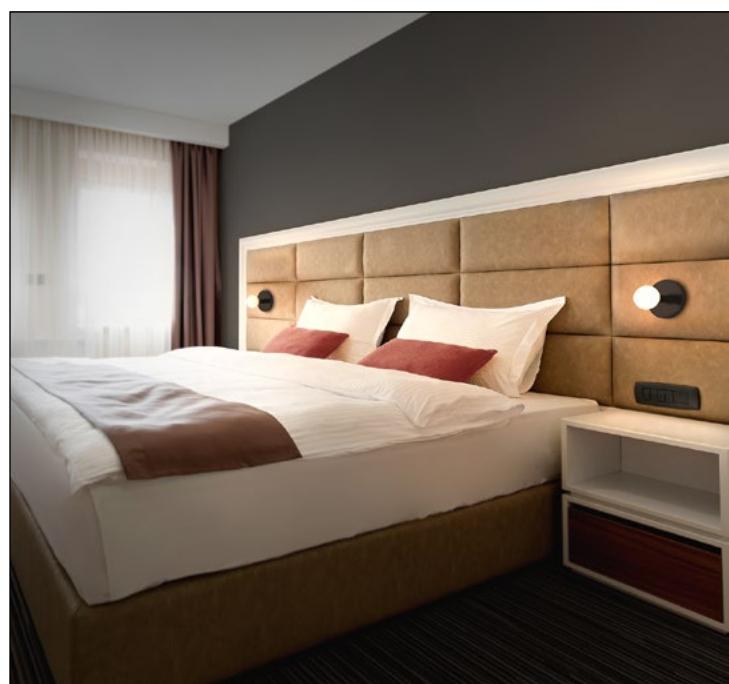

ORDERING GUIDE

| SERIES | DIFFUSER | SIZE | FINISH | COLOR TEMP. | WATTAGE | MOUNTING | |
|---------------------------|---------------------------|------|------------------|--|---|--------------|------------------------------------|
| SLG | MU | 02 | 02 - 2" Diameter | BL - Matte Black WH - White PC - Polished Chrome | 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K (30K Default) | 3W - 3 Watts | SP2 - 2" Canopy SP5 - 5" Canopy |
| SGS - Surface Light Guide | MU - Mushroom Light Guide | | | | | | |

Example: SLG - MU - 02 - BL - 30K - 3W - SP5

Socket Color



BL - Matte Black



WH - White



PC - Polished Chrome

Standard Finishes

Wattage (Lumens measured at 3000K)

3W = 3 Watts / 133 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).

Mounting

SP2 = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)

Cable with modular connector (and optional wire harness) attaches to a remote driver

SP5 = 5" round canopy with integral universal driver (120-277V / TRIAC, ELV, 0-10V dimming, included), attaches to rear of canopy and sits inside ceiling mounted junction box

