


SURFACE MOUNT LIGHT GUIDE - SHORT FROSTED DIFFUSER



**SP2 CANOPY
MOUNTING OPTION
(DRIVER SOLD SEPARATELY)**

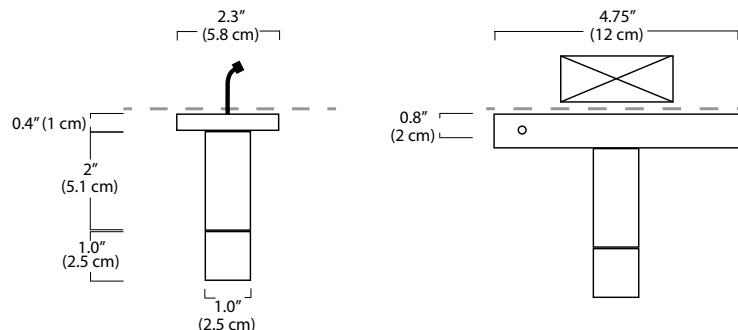


**SP5 CANOPY
MOUNTING OPTION
(INTEGRATED DRIVER)**

SPECIFICATIONS

COLOR RENDERING INDEX	90 CRI
FINISHES	Black (BL), White (WH), or Polished Chrome (PC)
DIMMING	TRIAC/ELV/0-10
COLOR TEMP.	27K, 30K, 35K, 40K (30K Default)
Fixture Wattage	3W
INPUT VOLTAGE	120-277 VAC
LUMENS (measured at 3000K)	133 Lm
Fixture Weight	1.0 lb. (0.45 kg)

FEATURES

- Stamped steel canopy, acrylic light guide
- Damp location rated
- SP2 Canopy includes 8' of coaxial cable - connects to remote driver (not included)
- SP5 Canopy includes integral universal driver mounted to top of canopy

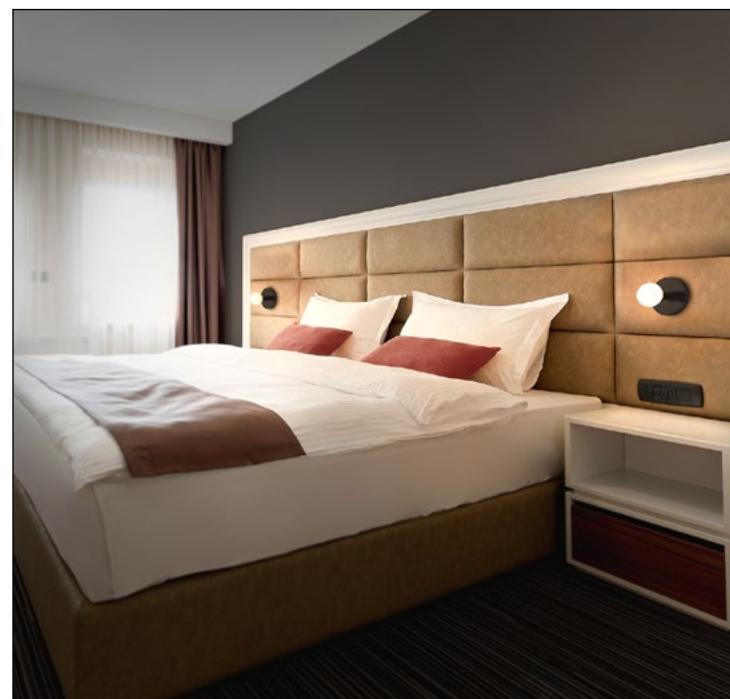

ORDERING GUIDE

SERIES	DIFFUSER	SIZE	FINISH	COLOR TEMP.	WATTAGE	MOUNTING
SLG	SF	01	BL - Matte Black WH - White PC - Polished Chrome	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K (30K Default)	3W - 3 Watts	SP2 - 2" Canopy SP5 - 5" Canopy
SGS - Surface Light Guide	SF - Short Frosted Light Guide	01 - 1" Diameter				

Example: SLG - SF - 01 - BL - 30K - 3W - SP5

Socket Color



BL - Matte Black



WH - White



PC - Polished Chrome

Standard Finishes

Wattage (Lumens measured at 3000K)

3W = 3 Watts / 133 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).

Mounting

SP2 = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)

Cable with modular connector (and optional wire harness) attaches to a remote driver

SP5 = 5" round canopy with integral universal driver (120-277V / TRIAC, ELV, 0-10V dimming, included), attaches to rear of canopy and sits inside ceiling mounted junction box

