

SSM2 PENDANT



96" Square Canopy / 400 Short Frosted Pendants / Arching Wave Pattern



SPECIFICATIONS

Standard Finishes*	Matte Black (BL), Polished Chrome (PC), or White (WH)
Custom Finishes*	Bronze (BZ), Satin Gold (SG), or Satin Silver (SS)
LED Color Temperature	Available in 27K, 30K, 35K, and 40K (30K Standard)
Wattage	800 Watts (2W / 86 Lm per pendant)
Lumens	58,000 Lumens
Driver Location	Integral in canopy
Dimming	Universal (TRIAC, ELV, 0-10V)
Color Rendering Index	90CRI
Input Voltage	120-277VAC - 50/60Hz
Weight	320 lbs. (145 kgs.)
Max. Overall Height	102in - field adjustable up/down as needed

(*) Finish color applies to canopy faceplates and sockets.
All finishes include black backplate, except White (includes white backplate).

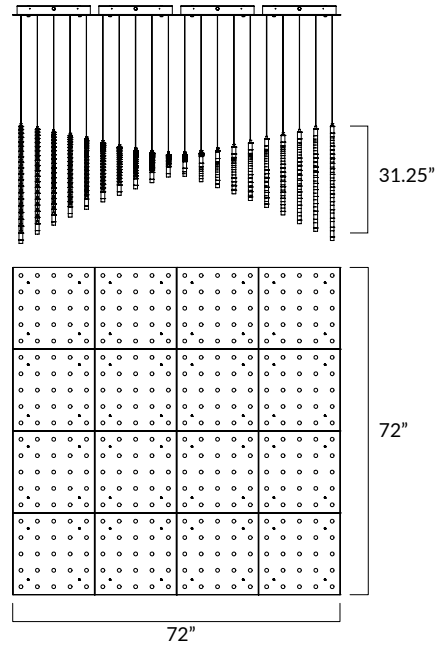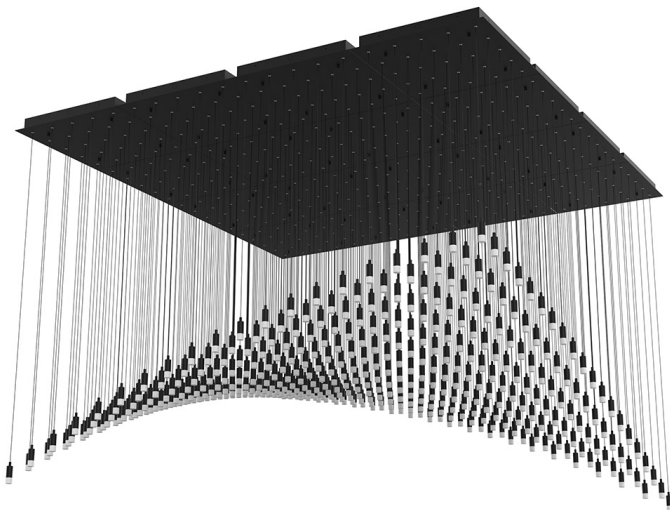

ORDERING GUIDE

SERIES	LENGTH	FINISH	VOLTS/DIMMING	COLOR TEMP.	DRIVER
SSM2	096P		27U		
SSM2 - Short Frosted Pendant Arching Wave Pattern	096P - 96" x 96" Canopy	Standard BL - Matte Black PC - Polished Chrome WH - White Special Order BZ - Bronze SG - Satin Gold SS - Satin Silver Other CS - Customer Specification	27U 120-277VAC Universal Dimming	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K (30K Default)	C - Canopy Mounted Driver Location R - Remote Driver Location

Example: SSM2 - 096P - BL - 27U - 30K - R