
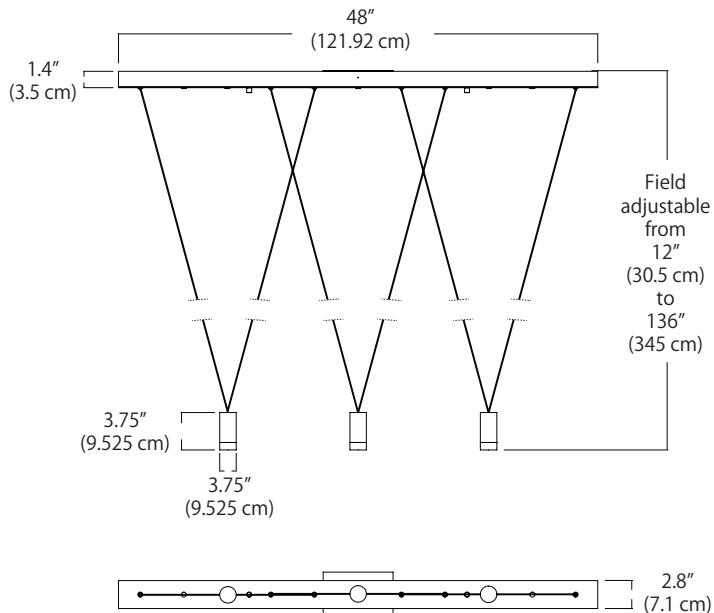


SWING 48" SUSPENDED PENDANT

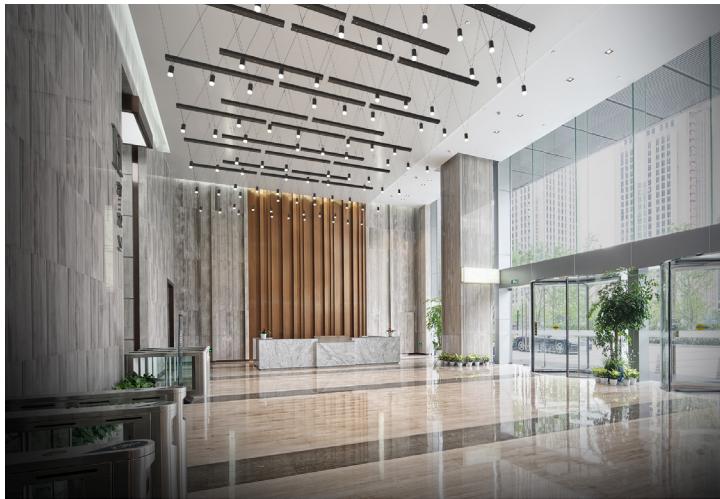

NOTE: Pendants arrive pre-installed to canopy faceplate with approximately 72" of exposed cable beneath canopy faceplate. Cables are fully adjustable - up or down - and no cutting or splicing is required.

PROJECT: SPECIFIER:
SKU: QUANTITY: DATE:

SPECIFICATIONS

Finish	Matte Black (BL) or White (WH)
LED Color Temperature	2700K, 3000K, 3500K, or 4000K (3000K Standard)
Fixture Wattage	15 Watts
Lumens	1090 Lumens
Driver Location	Integral in canopy
Dimming	Universal (TRIAC / ELV / 0-10 Dimming)
Color Rendering Index	90CRI
Input Voltage	120-277VAC - 50/60Hz
Fixture Weight	16 lbs. (7.3 kg)
Max. Overall Height	136in - field adjustable up/down as needed Pre-set to 72" (approx. 66" in exposed cable below canopy faceplate)

- Includes 3 adjustable 144-inch "V" cables - no cutting or splicing of wires is required
- Excess cable stays coiled inside powder-coated steel canopy
- Driver located inside canopy
- Damp location rated



ORDERING GUIDE

SERIES
SWG

SWG
Swing Pendant
in Level Pattern

SIZE
48P

48P
48" Length

FINISH
BL

BL - Matte Black
WH - White

VOLTS/DIMMING
27U

27U - 120-277VAC,
Universal Dimming

CCT
30K

27K 2700K
30K 3000K
35K 3500K
40K 4000K
(30K Standard)

Example: SWG - 48P - BL - 27U - 30K