

SHORT CONE SUSPENDED PENDANT

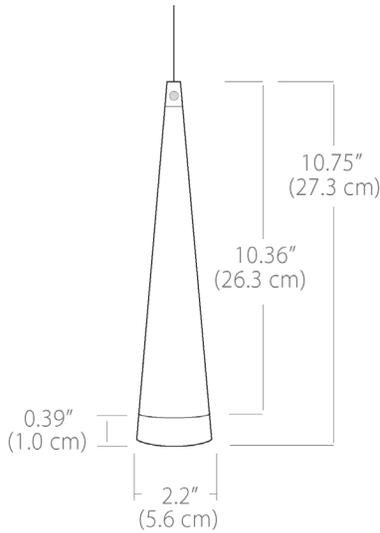


SPECIFICATIONS

Finish	Matte Black, White, or Polished Chrome
LED Color Temperature	3000K (standard) 2700K, 3500K, or 4000K also available
Wattage	5 Watts / 397 Lumens
Driver Location	Integral in canopy, remote, or above canopy (depending on canopy selected)
Dimming	Universal (TRIAC, ELV, 0-10V)
Color Rendering Index	90CRI
Input Voltage	120-277VAC - 50/60Hz
Cable Length	8' (for longer lengths, consult factory)

CUSTOM OPTIONS

See page 2 for socket finish and cord color options.



BL
Matte Black
Gold interior



WH
White
White interior



PC
Polished Chrome
Polished Chrome interior

ORDERING GUIDE

CATEGORY

SP

SP
Small Pendant

SERIES

COS

COT
Tall Cone

DIFFUSER

RR

RR
Reflector Ring

SIZE

02

02
2" Diameter

SOCKET COLOR

[Blue Box]

Standard
 BL - Matte Black/Gold
 WH - White/White
 PC - Polished Chrome/Polished Chrome
Special Order
 BZ - Bronze/Gold
 SG - Satin Gold/White
 SS - Satin Silver/Polished Chrome

CCT

[Blue Box]

27K - 2700K
 30K - 3000K
 35K - 3500K
 40K - 4000K
 (30K Standard)

WATTAGE

5W

5W
5 Watts / 397 Lm

MOUNTING

[Blue Box]

SP2 - 2.5" Canopy
 SP5 - 5" Canopy
 MPC - Multi-Port Canopy
 JTA - JackTrack

← PRODUCT CODE | OPTIONS →

CABLE LENGTH

[Blue Box]

Indicate Cable Length in Inches - leave blank for default
096 = 96" (default)
240 = 240" (max.)

Socket Color

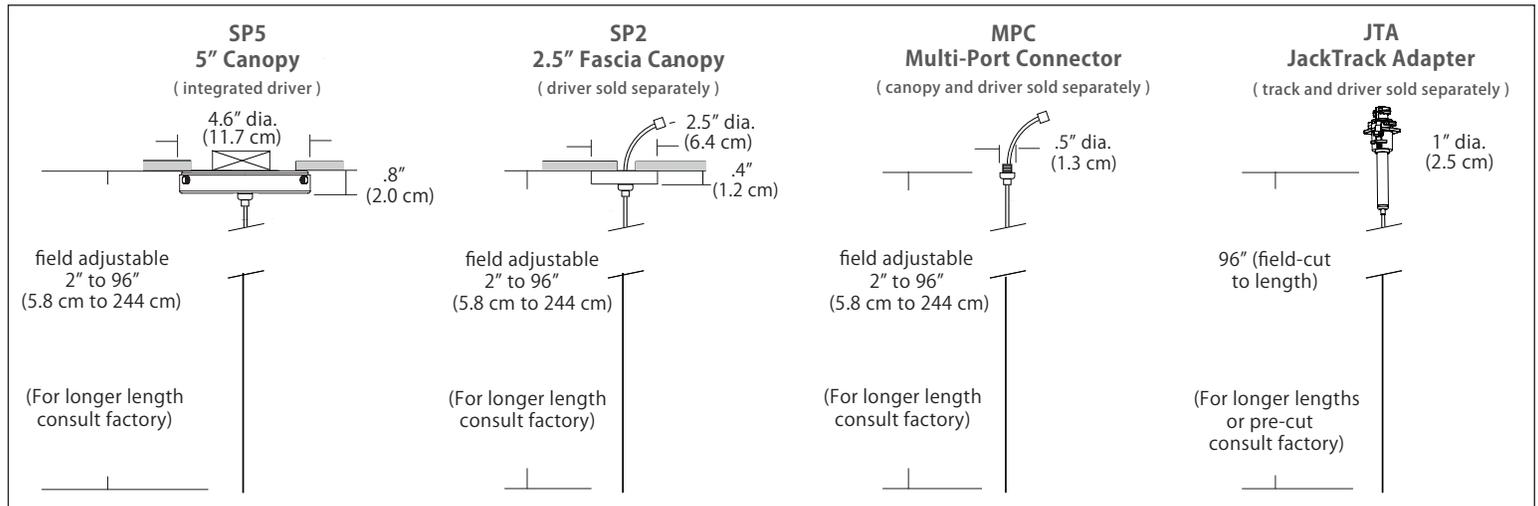


Wattage (Lumens measured at 3000K)

5W = 5 Watts / 397 Lumens

Mounting





















- SP5** = 5" round canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box
Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)
- SP2** = 2.5" thin profile round canopy that attaches flush to a rigid ceiling (driver sold separately)
Cable with modular connector (and optional wire harness) attaches to a remote driver
- MPC** = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately)
Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)
 MPC options include:
 - Quatro, Duo, and Solo Modular Systems
 - Multi-Port canopies
- JTA** = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately)
Cable is cut to length and inserted in JackTrack adapter



Cable Length

- 096** = 96" (Default Length).
XXX = Custom Length (300" = maximum length)
 For Custom Lengths, please indicate length in inches.

For more information on Quatro, Duo, or Solo Modular Systems, JackTrack, or Multi-Port Canopies, see blackjacklighting.com.

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. (12.7 cm)	 (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. (6.4 cm)	 (Remote Driver required)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# MQ-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-# MQ-2425-#	 8" OC (20.3 cm) 23.9" (60.7 cm) 9 Port  4.8" OC (12.2 cm) 23.9" (60.7 cm) 25 Port	 21.5" (54.6 cm) 2.5" (6 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# MD-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-# MD-3818-#	 7.5" OC (19 cm) 37.7" (97.8 cm) 3" OC (7.6 cm) 10 Port  4.1" OC (10.4 cm) 37.7" (97.8 cm) 2.5" OC (6.4 cm) 18 Port	 4.7" (11.9 cm) 2.5" (6 cm)  6" (15.2 cm) 2.5" (6 cm) (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# MS-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-# MS-4811-#	 4.4" OC (11.2 cm) 21.8" (56 cm) 2.8" (7 cm) 5 Port  4.4" OC (11.2 cm) 48" (123 cm) 2.8" (7 cm) 11 Port	 2.8" (7 cm) 1.4" (4 cm) (Integrated or Remote Driver)  2.8" (7 cm)	BL Matte Black WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 11" dia. (27.9 cm) 7.4" OC (18.8 cm) 3 Port  11" dia. (27.9 cm) 2.9" OC (7.4 cm) 9 Port	 10" dia. (25.4 cm) 2.1" (5.3 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 20" dia. (50.8 cm) 14.5" OC (36.8 cm) 3 Port  20" dia. (50.8 cm) 6.4" OC (16.3 cm) 12 Port	 18" dia. (45.7 cm) 2.5" (6 cm) (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack J1-XXXX-XX-CH024 48" JackTrack J1-XXXX-XX-CH048 94" JackTrack J1-XXXX-XX-CH094	 23" (58.4 cm) 1.75" (4.5 cm)  47" (119.4 cm) 1.75" (4.5 cm)  94" (238.8 cm) 1.75" (4.5 cm)	 1.38" (3.5 cm) 1.75" (4.5 cm) (Integrated or Remote Driver)	BL Matte Black WH White


For more information on Quatro, Duo, or Solo Modular Systems, JackTrack, or Multi-Port Canopies, see blackjacklighting.com.

System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------


Quatro

4S (4' 2x2 / 9 Port)
MQ-2409-XX-4S-X-XXX

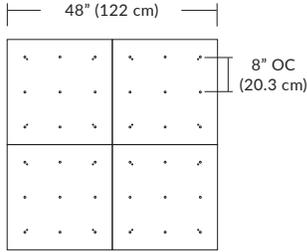Square Configurations



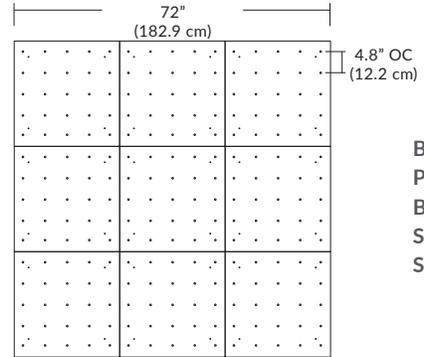
6S (6' 3x3 / 25 Port)
MQ-2425-XX-6S-X-XXX




BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver

4L (4'x2' / 9 Port)
MQ-2425-XX-4L-X-XXX

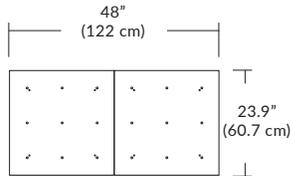Linear Configurations



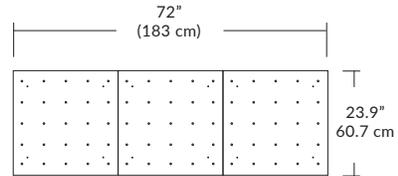6L (6'x2' / 25 Port)
MQ-2425-XX-6L-X-XXX




Additional configurations and options available. Contact factory for details.


Duo

6L (6'4"x6" / 10 Port)
MD-3810-XX-6L-X-XXX

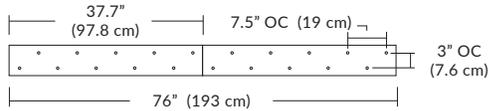Linear Configurations



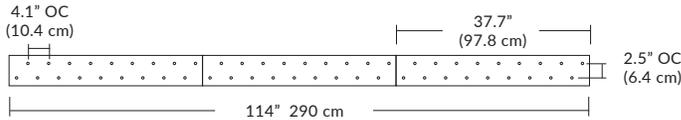9L (9'6"x6" / 18 Port)
MD-3818-XX-9L-X-XXX




BL Matte Black
PC Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver


Additional configurations and options available. Contact factory for details.

Solo


Solo 48" Linear Configuration




Solo (L) Configuration

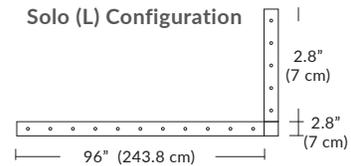

Solo 22" Grid Configuration

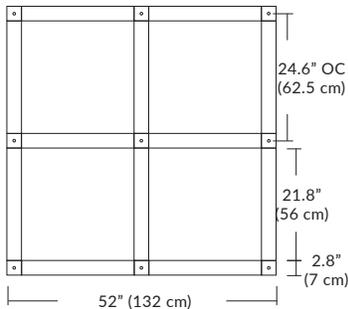

Solo 48" Grid Configuration

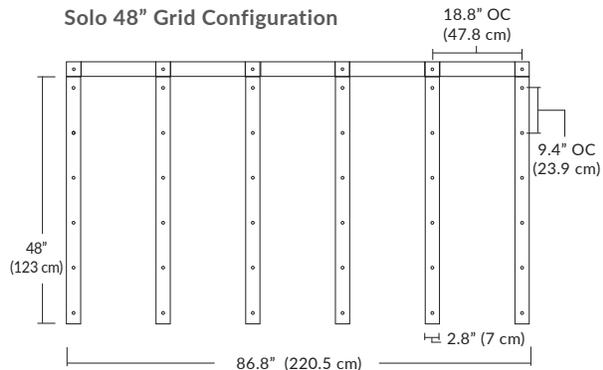

BL Matte Black
WH Pol. Chrome
BZ Bronze
SG Satin Gold
SS Satin Silver

Additional configurations and options available. Contact factory for details.


For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjack.com.

Universal Driver



Universal dimmable (TRIAC, ELV or 0-10V), Flicker-free dimming 100% to 2% (with optimal configuration), auto reset, short circuit, overload and thermal protection.
 NOTE: Total pendant wattage needs to be 10% less than driver wattage.

SKU	Watts	Output Volts	Input Volts	Mounting	Comments
PS-94ST-15W-27U-IN	15W	24V	120V - 277V	Integral	(27U)
PS-94ST-20W-27U-IN	20W	24V	120V - 277V	Integral	(27U)
PS-94ST-20W-27U-IC	20W	24V	120V - 277V	Inside Canopy	(27U)
PS-94SR-20W-27U-IC	20W	24V	120V - 277V	Inside Round Canopy	(27U)
PS-94ST-40W-27U-IN	40W	24V	100V - 305V	Integral in End Feed	(27U)
PS-94ST-40W-27U-IC	40W	24V	120V - 277V	Inside Canopy	(27U)
PS-94ST-60W-27U-IN	60W	24V	120V - 277V	Integral	(27U)
PS-94SR-60W-27U-IN	60W	24V	120V - 277V	Inside Round Canopy	(27U)
PS-94ST-96W-27U-IN	96W	24V	120V - 277V	Integral	(27U)
PS-94ST-40W-27U-RE	40W	24V	100V - 305V	Remote	(27U)
PS-94ST-60W-27U-RE	60W	24V	120V - 277V	Remote	(27U)
PS-94ST-96W-27U-RE	96W	24V	120V - 277V	Remote	(27U)

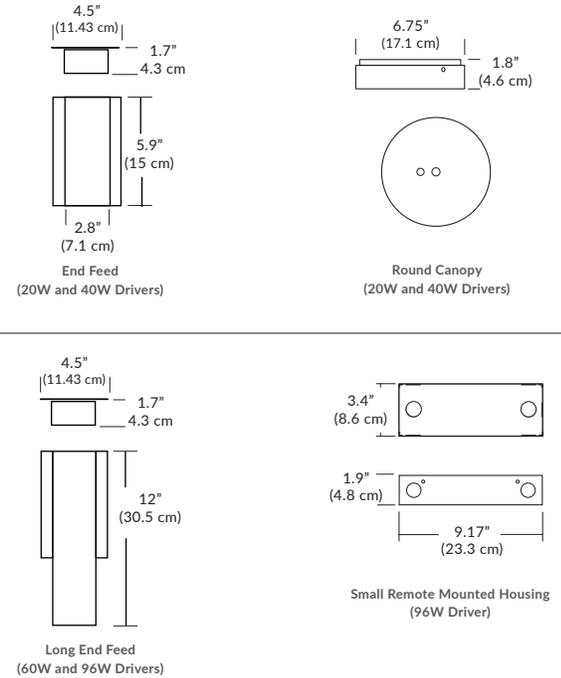

DRIVER ORDERING GUIDE

Type	Watts	Dimming	Mounting
[]	[]	[]	[]
94SR Universal Driver in Remote Canopy 94ST Universal (Standard) 94CS Customer Specification	20W 20 Watts 40W 40 Watts 60W 60 Watts 96W 96 Watts	27U 120-277V/ Universal Dimming (TRIAC / ELV / 0-10V)	IN Integral RE Remote IC Inside Canopy

Example: PS-94ST-96W-27U-RE