


SOLO SYSTEM

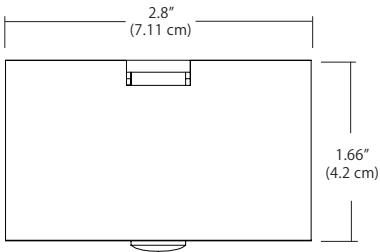

How To Order a Solo System

- Complete the Solo Canopy Order Guide, below
 - Choose Canopy Size and Finish
 - Choose Mounting type (see pages 2-3)
 - Choose Pendants (see pages 6, 7, & 8)
- Go to page 9 and choose Driver Type/Watts/Dimming/Mounting in Ordering Table

For Solo System Layout Guide, see page 5

Contact your Blackjack Lighting Sales Representative or factory for more information


ORDERING GUIDE

Series	Canopy Size	Finish	Mounting Type	Pendant	For Joiner options, See page 4.
MS MS Solo Modular System	4811- 48"/ 11 Ports 48CS- 48"/ Customer Specification 2205- 22"/ 5 Ports 22CS- 22"/ Customer Specification	BL - Matte Black WH - White Special Order BZ - Bronze SG - Satin Gold SS - Satin Silver CS - Customer Specified	SURJ- Surface Mount/ Remote Driver/J-Box Cover SUIE- Surface Mount/ Integral Driver/End Feed SUIL- Surface Mount/ Integral Driver/Long End Feed STRJ- Stem Mount / Remote Driver/J-Box Cover STIR- Stem Mount / Standalone Driver w/Round Canopy STID- Stem Mount/ Standalone Driver w/Deep Round Canopy SPRJ- Suspended/Remote Driver/J-Box Cover SPIR- Suspended/Standalone Driver w/Round Canopy SPID- Suspended/Standalone Driver w/Deep Round Canopy	LGDSF Short Frosted Lightguide Other pendants available - see following pages 6, 7 and 8 for options and ordering codes.	For Drivers/Wattage/ Dimming/Mounting information, See page 9
Example: MS-4811-BL-SURJ-LGDSF					


SPECIFICATIONS

Standard Finishes	Matte Black (BL), White (WH), or Polished Chrome (PC)
Custom Finishes	Bronze (BZ), Satin Gold (SG), or Satin Silver (SS)
Input Voltage	120-277VAC - Low Voltage 24V canopy system
CCT Options	2700K, 3000K, 3500K, or 4000K
Wattage	Available with 20W, 40W, 60W, or 96W driver options
Mounting	Can be Surface Mounted, Rigid Stem Mounted, or Suspended with adjustable aircraft cable
Rated	Damp Location Rated


Lengths

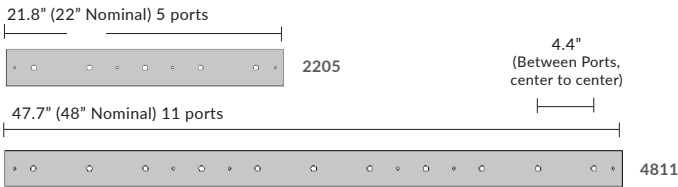


Mounting (see pages 2-3)

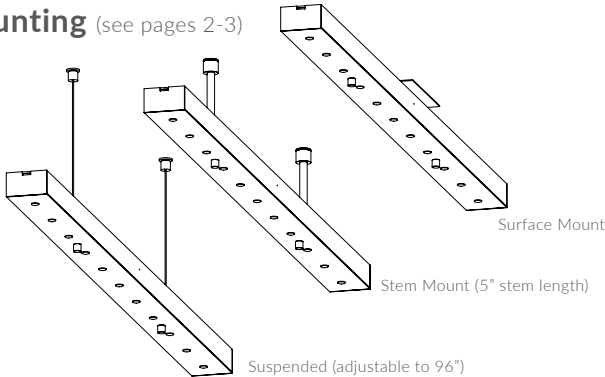

SURFACE MOUNT

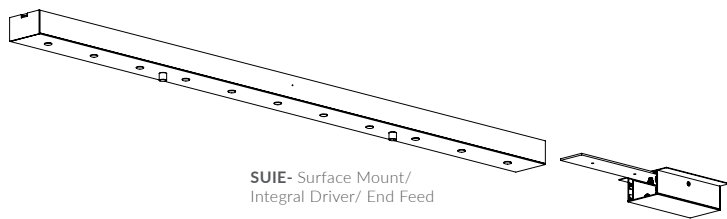


SUIE- Surface Mount/
Integral Driver/ End Feed

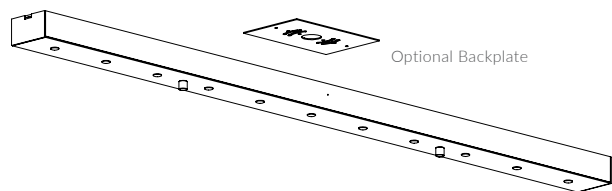

Optional Backplate


SURJ- Surface Mount/
Remote Driver/ J-Box Cover

SURFACE MOUNT POWER FEED OPTIONS




**Surface Mount
Junction Box Cover**

SURJ- Surface Mount/
Remote Driver/ J-Box Cover



**Surface Mount
End Feed**


SUIE- Surface Mount/ Integral
Driver/ End Feed
(20-40W max.)



**Surface Mount
Long End Feed**


SUIL- Surface Mount/ Integral
Driver/ Long End Feed
(60-96W max.)

Driver Options: see page 8

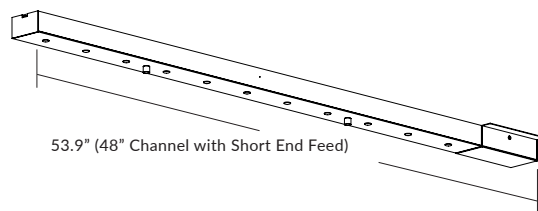


53.9\"/>

STEM MOUNT

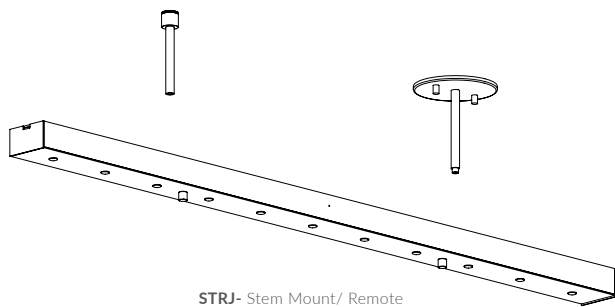


STRJ- Stem Mount/ Remote
Driver/ J-Box Cover
(96W max.)

STEM MOUNT POWER FEED OPTIONS




**Stem Mount
Round Canopy**

STRJ- Stem Mount/ Remote
Driver/ J-Box Cover
(96W max.)



**Stem Mount
Round Canopy**

STIR- Stem Mount/
Driver Inside Canopy/
Round Canopy
(20-40W)




**Stem Mount
Junction Box Cover**

STID- Stem Mount/ Driver
Inside Canopy/ Deep Round
Canopy (60-96W)

Driver Options: see page 8


Stem Support Hardware: see page 4

SUSPENDED

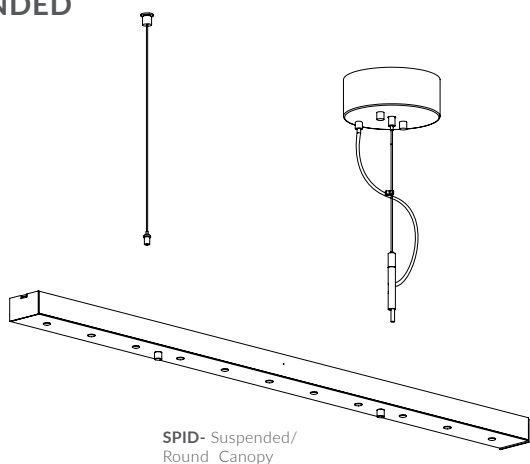


SPID- Suspended/
Round Canopy

SUSPENDED POWER FEED OPTIONS




Aircraft Cable Mount

SPRJ- Suspended/ Remote
Driver/ J-Box Cover (96W
max.)



Aircraft Cable

SPIR- Suspended/ Driver
Inside Canopy/ Round
Canopy (20-40W)




Aircraft Cable

SPID- Suspended/ Driver
Inside Canopy/ Deep Round
Canopy (60-96W)


Driver Options: see page 8

Aircraft Cable Hardware: see page 4


SURFACE MOUNTING

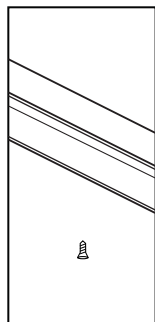


Fastener mounted through canopy to ceiling anchor (by others)

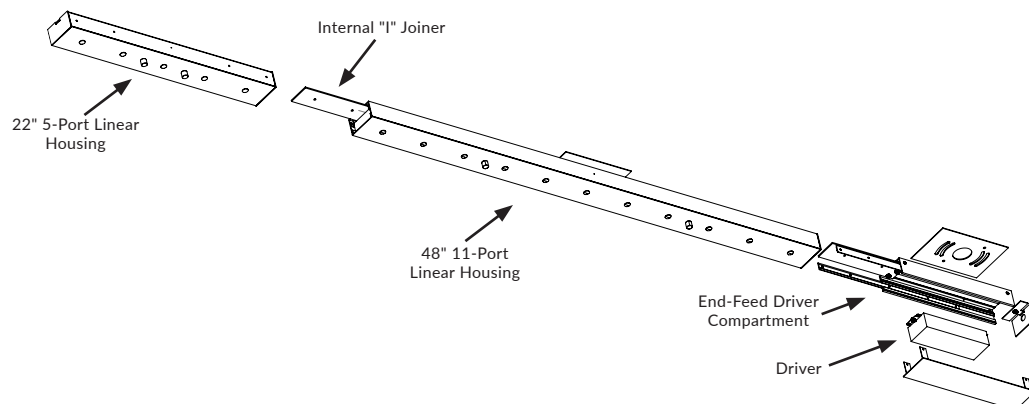


STEM MOUNTING

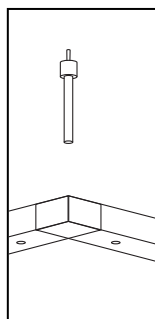


Stem shown Canopy Mounted

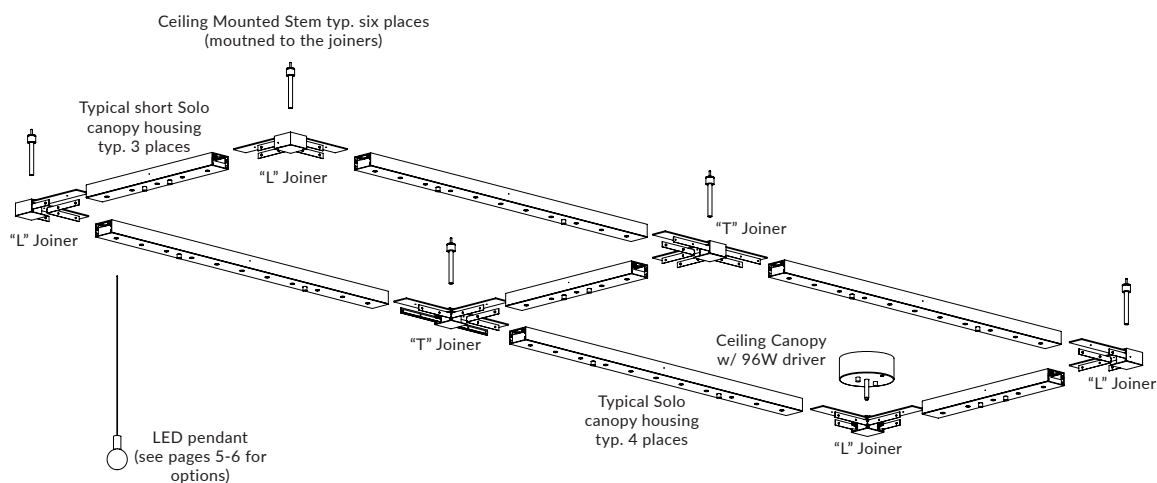

SUSPENSION MOUNTING

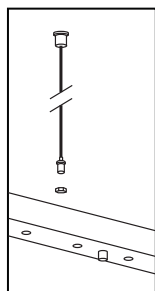


Aircraft cable shown Canopy Mounted

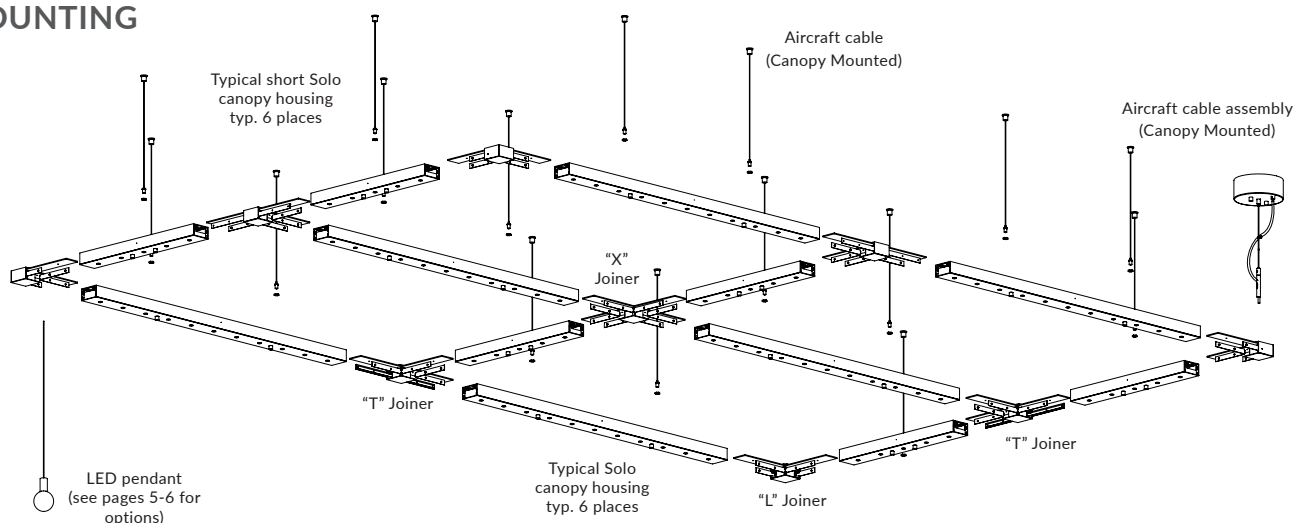


JOINER TYPES

All Joiners come with a joiner wiring kit, which includes:


- Wire for low voltage power connection
- Low voltage wire for 0-10V dimming control
- Wago Quick Connectors

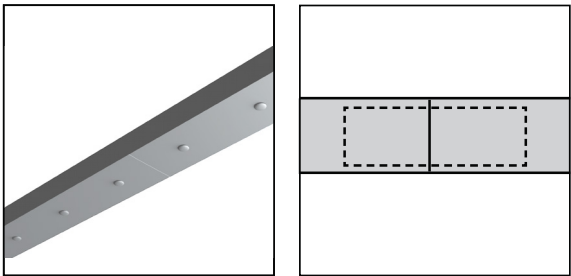


Internal "I" Joiner
MS-ACJI-BL
MS-ACJI-WH

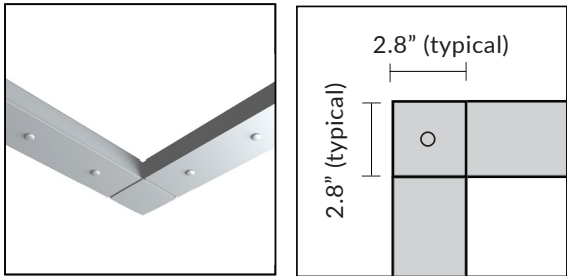

"L" Joiner
MS-ACJL-BL
MS-ACJL-WH

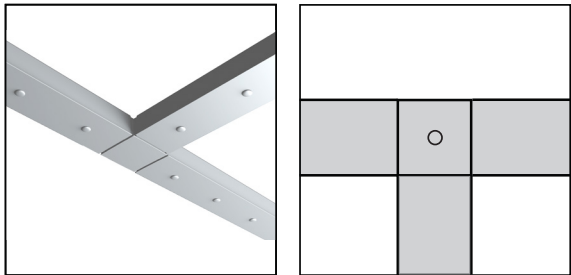


"T" Joiner
MS-ACJT-BL
MS-ACJT-WH

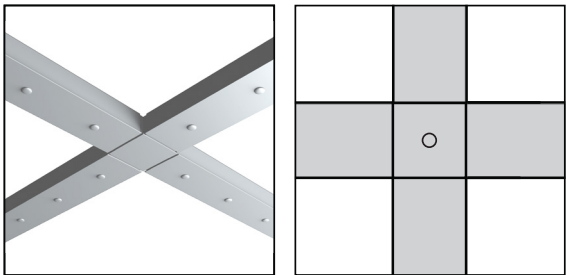


"X" Joiner
MS-ACJX-BL
MS-ACJX-WH


JOINER MOUNTING OPTIONS

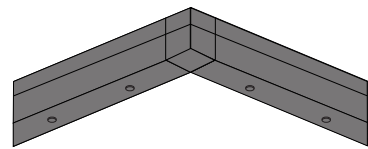

Surface Mount

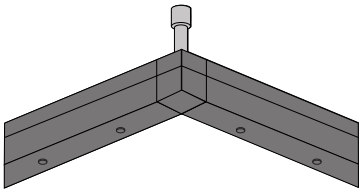

Stem Mount

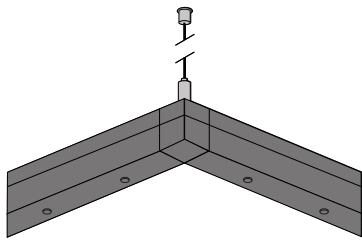


Suspended

SOLO ORDERING GUIDE


Type	Finish
ACJE- End Joiner	BL - Matte Black
ACJI- Internal "I" Joiner	WH - White
ACJL- "L" Joiner	
ACJT- "T" Joiner	Special Order
ACJX- "X" Joiner	BZ - Bronze
	SG - Satin Gold
	SS - Satin Silver
	CS - Customer Specified

SOLO SYSTEM CONFIGURATIONS


Solo 48" Linear Configuration




Solo (L) Configuration

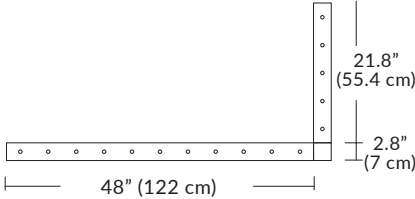

Solo 22" Grid Configuration

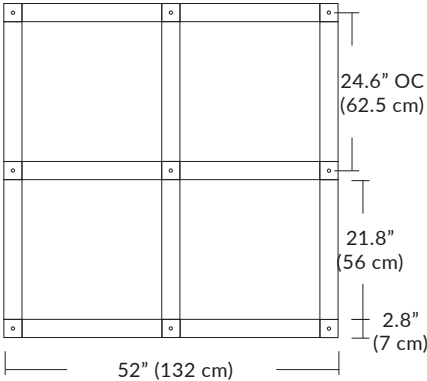

Solo 48" Grid Configuration

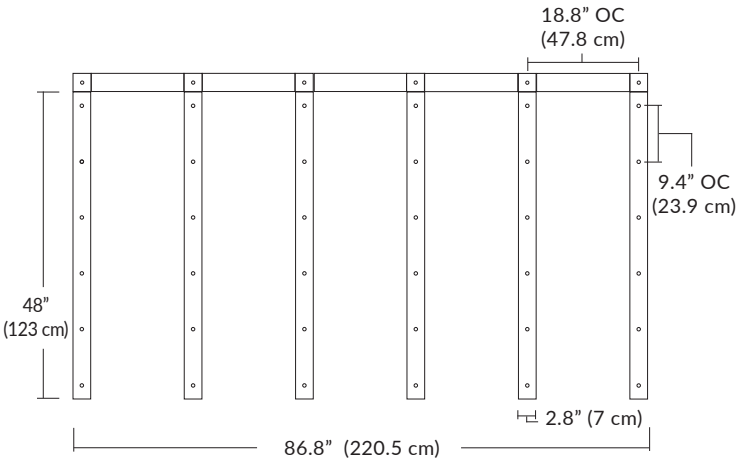

SOLO FINISH OPTIONS


BL - Matte Black


WH - White


PC - Polished Chrome

Standard Finishes



BZ - Bronze


SG - Satin Gold


SS - Satin Silver

Special Order Powder Coat Finishes


Single and Double Spaced Pendants

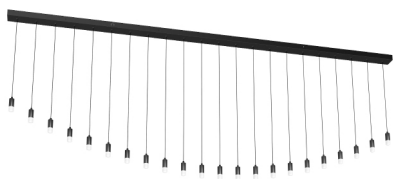

Linear 96" - Matte Black - Single Spaced
Short Frosted Pendants
in Curved Pattern
MS-4811-BL-SURJ-LGDSF-CS



Linear 96" - Matte Black - Single Spaced
Short Frosted Pendants
in Custom "X" Pattern
MS-4811-BL-SURJ-LGDSF-CS

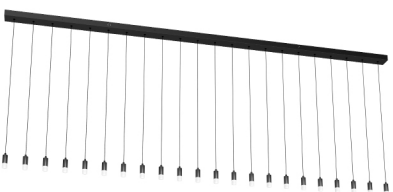

Linear 96" - Matte Black - Single Spaced
Short Frosted Pendants
in Level Pattern
MS-4811-BL-SURJ-LGDSF



Linear 144" - White - Custom Spaced
Short Frosted Pendants
in Level Pattern
MS-4811-WH-SURJ-LGDSF-CS



Linear 48" - White - Double Spaced
with Velo TC Pendants
in Level Pattern
MS-4811-WH-SURJ-VELCB-CS



L-Shaped 48" x 96" - Triple Spaced
8" Glass Sphere Pendants
in Level Pattern
MS-4811-BL-SURJ-SPSCL-CS

Joiner Spacing Pendants (Custom)



Square 48" x 48"
Joiner Spaced
12" Glass Sphere Pendant
MS-4811-WH-SURJ-SPLCL-CS



Grid 52" x 52"
Joiner Spaced
16" Domos Pendants
MS-4811-WH-SURJ-PBXWG-CS




Grid 48" x 144"
Joiner Spaced
16" Domos Pendant
MS-4811-WH-SURJ-DOMWG-CS


BLACKJACK® LIGHTING

Pendants available separately. For full specifications and ordering information, see <http://blackjacklighting.com>


LIGHT GUIDE - 2W / 86 LM




SHORT FROSTED
LIGHT GUIDE
LGDSF




TALL CLEAR
LIGHT GUIDE
LGTC



TALL FROSTED
LIGHT GUIDE
LGDTF



BUBBLE
LIGHT GUIDE
LGDBU



CANDLE
LIGHT GUIDE
LGDC



A-LAMP
LIGHT GUIDE
LGDAL




GRADIENT
LIGHT GUIDE
LGGR



MUSHROOM
LIGHT GUIDE
LGDMU

3" ACRYLIC GLOBE - 2W / 86 LM



FROSTED ACRYLIC
3" GLOBE
GLSFR




CLEAR ACRYLIC
3" GLOBE
GLSCL




BUBBLE ACRYLIC
3" GLOBE
GLSBU

3" GLASS GLOBE - 2W / 147 LM



WHITE GLASS
3" GLOBE
GGSWH

5" GLASS GLOBE - 3W / 238 LM




WHITE GLASS
5" GLOBE
GGLWH

5" ACRYLIC GLOBE - 5W / 368 LM




CLEAR ACRYLIC
5" GLOBE
GLLCL


NOVO TALL - 5W / 368 LM

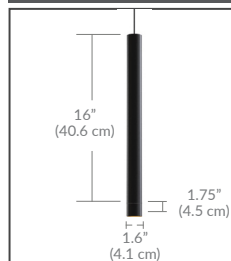


NOVO TALL
REFLECTOR RING
GOLD - **NVTRG**
WHITE - **NVTRW**

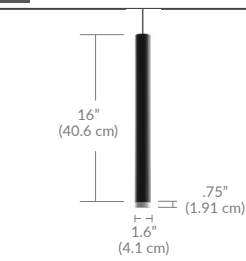

NOVO TALL
LUMINOUS RING
NVTLR

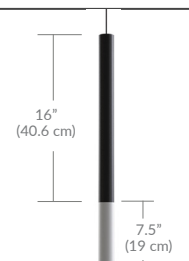


NOVO TALL
FROSTED DIFFUSER
NVTFR

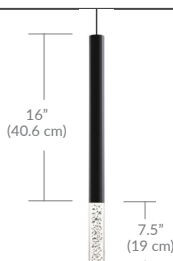


NOVO TALL
BUBBLE DIFFUSER
NVTBU

TALL CONE - 3W / 204 LM

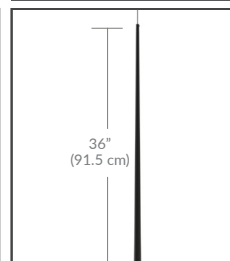


TALL CONE
LUMINOUS RING
COTLR

SHORT CONE - 5W / 397 LM

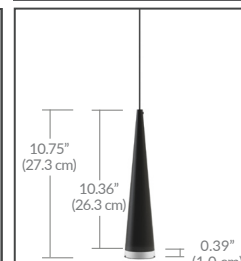


SHORT CONE
REFLECTOR RING
COSRR

NOVO SHORT - 5W / 368 LM



NOVO SHORT
REFLECTOR RING
GOLD - **NVSRR**
WHITE - **NVSRW**



NOVO SHORT
LUMINOUS RING
NVSLR




NOVO SHORT
FROSTED DIFFUSER
NVSFR




NOVO SHORT
BUBBLE DIFFUSER
NVSBU

24" & 36" NOVO - 5W / 368 LM



24" NOVO with
LUMINOUS RING*
NV2LR

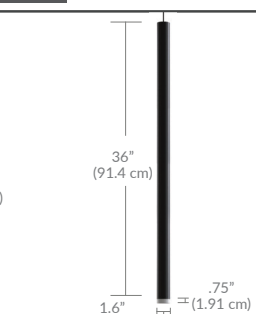

36" NOVO w/ LUMINOUS RING*
NV3LR

* (Can be used with any Novo Tall or Novo Short diffuser)

BLACKJACK® LIGHTING

Pendants available separately. For full specifications and ordering information, see <http://blackjacklighting.com>

8" GLASS SPHERE - 2W / 86 LM



12" GLASS SPHERE - 5W / 368 LM



5" VELO - 2W / 86 LM



4" BULLET - 2W / 86 LM



8" BULLET - 5W / 368 LM



3" COLOR GEL - 2W / 86 LM



10" PILLBOX - 12W / 680 LM



16" DOMOS - 12W / 680 LM



For more information on Solo Systems, Duo Systems, Quatro Systems, JackTrack Systems, or Multi-Port Canopies, see blackjacklighting.com.

Universal Drivers




Universal dimmable (TRIAC, ELV or 0-10V), Flicker-free dimming 100% to 2%, auto reset, short circuit, overload and thermal protection.
Input Volts: 120-277V. Output Volts: 24V.

	SP2	SP5	Round	Quatro	Duo	Solo	JackTrack
Description	Round 2.5" Fascia Canopy	Round 5" Canopy	Round 10" Round 20" Canopies	Square 24" Canopy	Rectangular 38" Canopy	Rectangular 22" Canopy 48" Canopy	Linear Track
System #				MQ-XXX	MD-XXX	MS-XXX	J1-XXX
Canopy #	XXX-SP2	XXX-SP5	C-MPR-XXX	C-MPS-XXX	C-MPT-XXX	C-MPL-XXX	


SKU	Watts						
INTEGRAL MOUNTED (Inside Fixture)							
PS-94ST-15W-27U-IN	15W		X				
PS-94ST-20W-27U-IN	20W			X	X	X	
PS-94ST-40W-27U-IN	40W			X	X	X	
PS-94ST-60W-27U-IN	60W			X	X	X	
PS-94ST-96W-27U-IN	96W			X	X	X	
CANOPY MOUNTED (Inside Mounting Canopy)							
PS-94ST-20W-27U-IC	20W					X	
PS-94ST-40W-27U-IC	40W					X	X
PS-94ST-40W-27U-IC	40W						X
PS-94SR-60W-27U-IC	60W					X	X
PS-94SR-96W-27U-IC	96W					X	X
PS-94ST-300-27U-IC	300W						X
REMOTE MOUNTED (Inside Remote Housing)							
PS-94ST-40W-27U-RE	40W	X		X	X	X	X
PS-94ST-60W-27U-RE	60W	X		X	X	X	X
PS-94ST-96W-27U-RE	96W	X		X	X	X	X
PS-94ST-300-27U-RE	300W						X

Remote Canopy Mounting Options

For additional information on mounting options and canopy sizes, please refer to other pages in this specification sheet.



Remote Mounted Housing
(40W, 60W, or 96W Driver)



Remote Mounted Housing
(300W Driver)