



### IENNA LM-79 TEST REPORT

**Applicant's name** .....: Blackjack Lighting

**Address** .....: 1553 Barclay Blvd. Buffalo Grove, IL 60089

**Brand Name**.....: Blackjack Lighting

**Report No.**.....: BTR66.181.16.0025.47

**Product Name**.....: 038 Dot fixture with white reflector,26.5" diameter

**Model Number** .....: DOT-27C-PC or EG

**Tested by**  
(printed name and signature) .....: David Zhang 

**Title** .....: **Test Engineer**

**Approved by**  
(printed name and signature) .....: Steven Huo 

**Title** .....: **Approved Signatory**

**Date of issue** .....: Mar 20, 2017

**Testing Laboratory Name** .....: BEST Test Service Shenzhen Co., Ltd.  
1<sup>st</sup> Floor, 1<sup>st</sup> Building, Weitai Industrial Park, Yingrenshi, Shiyan, Baoan,

**Address** .....: Shenzhen, China  
[Tel:+86-755-28236006](tel:+86-755-28236006), Email: [certification@bestcert.cn](mailto:certification@bestcert.cn)

**Accrediation** .....: DLC/Lighting Facts/UL/ETL/ELI/CEC/EPA/DOE  
NVLAP Testing Lab Code: 200770-0

**Test specification**

**Standard** .....: IESNA LM-79

**Test procedure** .....: IESNA LM-79 Test Procedure

**Non-standard test method** .....: No

**Test Report Form No.** .....: BEST\_ LM-79

**TRF originator**.....: BEST Test Service Shenzhen Co., Ltd. Mr Tseng

**Master TRF** .....: BEST\_LM-79.doc

**Note:**  
This report is not valid as a BEST Test Report unless signed by an approved BEST Test Service Shenzhen Co., Ltd. This report shall not be reproduced except in full without the written approval of the testing laboratory. The test report only allows to be revised within the retention period unless further standard or the requirement was noticed. This report is for the exclusive use of BEST's Client and is provided pursuant to the agreement between BEST and its Client. BEST's responsibility and Liability are limited to the terms and conditions of the agreement. BEST assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the BEST name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by BEST. The observations and test results in this report are relevant only to the sample tested. This report by itself does not cover that the material, product, of service is or has ever been under a BEST certification program. National Voluntary Laboratory Accreditation Program (NVLAP) has accredited this laboratory under ISO17025: 2005 for specific laboratory activities as listed in the NVLAP directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

| <b>description:</b>  |   |
|--|---|
| Test date .....  | Mar 15, 2017 to Mar 20, 2017  |
| Sample Quantity .....  | 1 unit  |
| SKU.....   | N/A   |
| Rating(s) (V; Hz) .....  | AC 120V/ 60Hz   |
| Nominal Power.....   | 40.2W   |
| Nominal Power Factor .....   | N/A   |
| Nominal Lumen Output.....  | 2000 lm   |
| Nominal CCT .....  | 3000K   |
| Nominal CRI(Ra) .....  | 90  |
| Number of hours operated prior to measurement                                | 0H  |
| Total operating time of the product for measurements including stabilization | 3.5H  |
| Ambient temperature  | 24.7°C  |
| Orientation (burning position) of SSL product during test                    | Lighting Surface Down or Base Up  |
| Stabilization time   | 1.5 H   |
| Photometric method   | Sphere-spectroradiometer+Goniophotometer  |
| Calibration standard lamp used   | DC 24V 100W Omni-Directional Halogen Calibrated by NIM China(Sphere)<br>DC 120V 500W Omni-Directional Halogen Calibrated by NIM China(Goniophotometer)  |
| Correction factors applied   | Self absorbing applied  |
| Photometric measurement conditions   | See test method description below   |
| Equipments used  | EVERFINE HASS-2000 Sphere System<br>CHROMA 61602 AC Source<br>YOKOGAWA WT 310 Power Meter<br>FLUKE 52II<br>EVERFINE GOR-5000 Goniophotometer<br>CALIFORNIA INSTRUMENT 1501I AC Source<br>YOKOGAWA WT 210 Power Meter<br>FLUKE 233 Temperature Meter |
| Bandwidth of spectroradiometer   | 2nm   |
| Statement of uncertainties   | 1.12%   |
| Deviation from standard operating procedures,                                | None  |

**Photometric and Electrical Measurement**

Total light output (luminous flux) for the 25°C ±1°C ambient temperature conditions is measured using a EVERFINE 2.0 m 4 II geometry integrating sphere. Temperature is measured at a position inside the sphere. Spectral radiant flux measurements are made using Integral Sphere to the detector port of the integrating sphere. Each lamp is operated at rated voltage in its designated orientation by a CHROMA 61602 AC SOURCE. Each lamp should be stable before measurements are made as below:

Step 1 Take 3 measurements of the lamp light output at 15 minute interval (total time=30mintues.)This time period is in addition to the recommended pre-burning time.

Step 2 Calculate the percent difference between the maximum measured value and the minimum measured value for the three consecutive measurements.

Step 3 if the value calculated in Step 2 does not exceed 0.5 percent, the lamp is considered stable.

Luminous flux, chromaticity coordinates, correlated color temperature and color rendering index for each lamp are calculated from the spectral radiant flux measurements taken at 2 nm intervals over the range 380 to 780 nm by EVERFINE HASS-2000. The calibration of the sphere photometer-spectrometer system is traceable to the NIM China by a calibrated halogen incandescent lamp. Lamp efficacy (lumens per watts) for each lamp model is computed based on the revised luminous flux result. Electrical measurements including voltage, current, power and power factor are measured using the YOKOGAWA WT310 digital power Meter.

The total uncertainty of the light output measurements is estimated, at the 95% confidence level, not to exceed ±1.12% over the wavelength range 380-780 nm.


**Luminous Intensity**

A Everfine GOR-5000 Goniophotometer was used to measure the intensity at each angle of distribution, Luminous intensity (cd) is measured within each vertical plane at a 5° vertical angle increment (maximum) from 0° to 180° Luminous intensity (cd), measurements repeated in vertical planes about the lamp (polar) axis in maximum increments of 22.5° from 0° to 180°, and export the intensity (cd) with excel format. The test distance is 25meters from the Goniophotometer to the detector


**Photometric and Electrical Test Data**

| Input Voltage (V) | Frequency (Hz) | Input Current (A) | ITHD      | Input Power (W) | Power Factor | Lumen Output (Lumens) | Efficiency Lumen/w |
|-------------------|----------------|-------------------|-----------|-----------------|--------------|-----------------------|--------------------|
| 120.0             | 60.0           | 0.336             | /         | 40.13           | 0.997        | 2038.87               | 50.81              |
| CCT (K)           | CRI (Ra)       | R9                | x CIE1931 | y CIE1931       | u' CIE1976   | v' CIE1976            | Duv CIE1976        |
| 2991              | 93.0           | 59                | 0.4357    | 0.4004          | 0.2513       | 0.5197                | -0.0013            |

**Spectrul Plots**

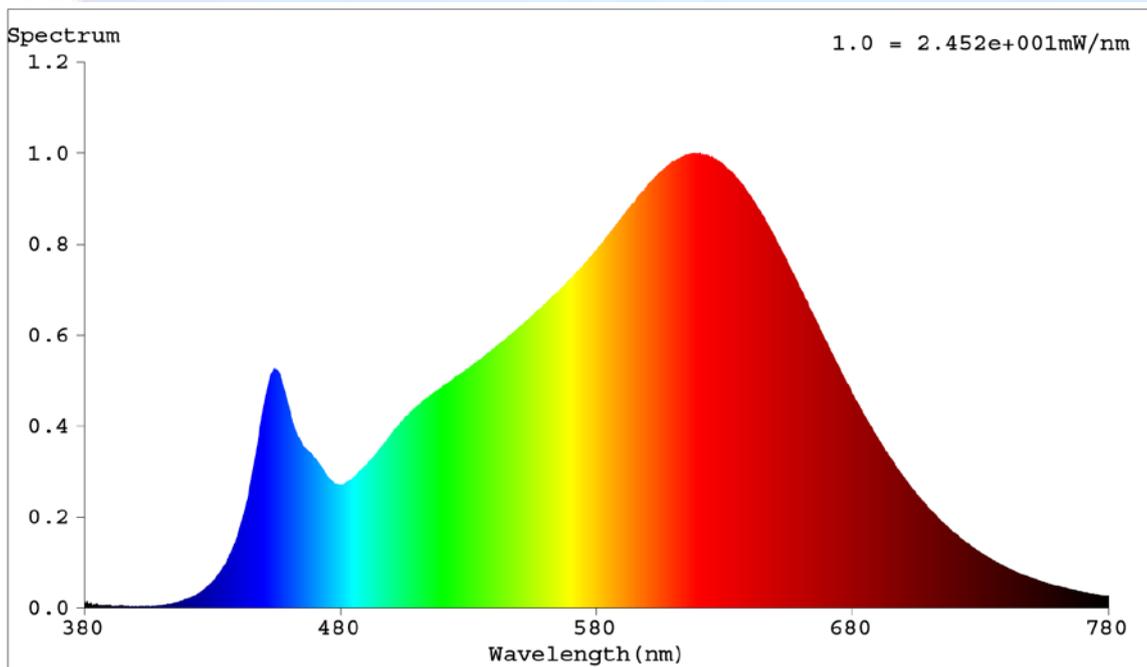

**7 Step Quadrangle**

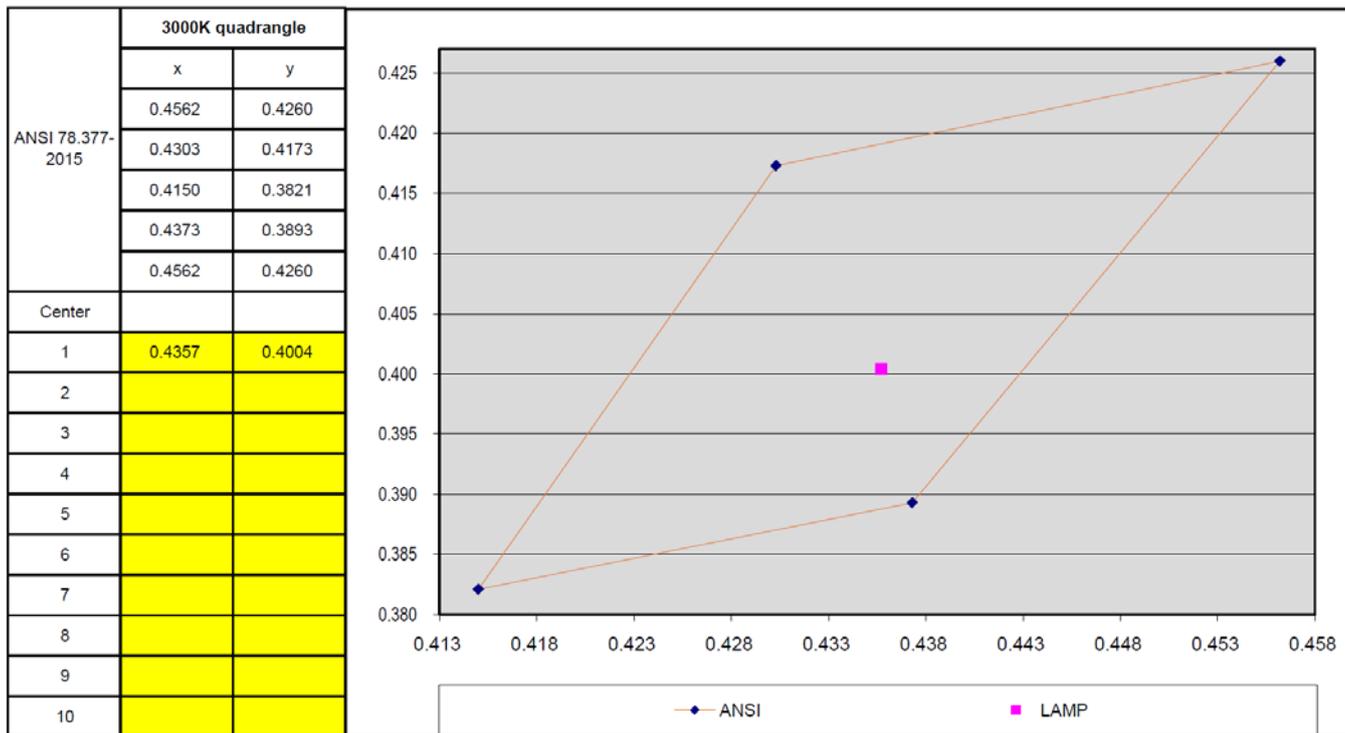



**EUT Photo**



LUMINAIRE PHOTOMETRIC TEST REPORT

|   |                       |                   |
|---|-----------------------|-------------------|
| Test:U:120.0V I:0.3352A P:40.13W PF:0.9967 Lamp Flux:2038.87x1 lm |                       |                   |
| NAME:   | TYPE:DOT-27C-PC or EG | WEIGHT:           |
| SPEC.:  | DIM.:                 | SERIAL No.:       |
| MFR.: Blackjack Lighting  | SUR.:0.45*0.45*.314   | PROTECTION ANGLE: |

| DATA OF LAMP     |                  | PHOTOMETRIC DATA Eff: 50.81 lm/W |         |                    |           |
|------------------|------------------|----------------------------------|---------|--------------------|-----------|
| MODEL            | DOT-27C-PC or EG | I <sub>max</sub> (cd)            | 194.6   | S/MH(C0/180)       | 1.63      |
| NOMINAL POWER(W) | 40.2             | LOR(%)                           | 100.0   | S/MH(C90/270)      | 1.58      |
| RATED VOLTAGE(V) | 120.0            | TOTAL FLUX(lm)                   | 2038.9  | η UP, DN(C0-180)   | 24.5,25.7 |
| NOMINAL FLUX(lm) | 2038.87          | CIE CLASS                        | DIFFUSE | η UP, DN(C180-360) | 24.1,25.7 |
| LAMPS INSIDE     | 1                | η up(%)                          | 48.6    | CIBSE SHR NOM      | 1.75      |
| TEST VOLTAGE(V)  | 120.0            | η down(%)                        | 51.4    | CIBSE SHR MAX      | 1.75      |

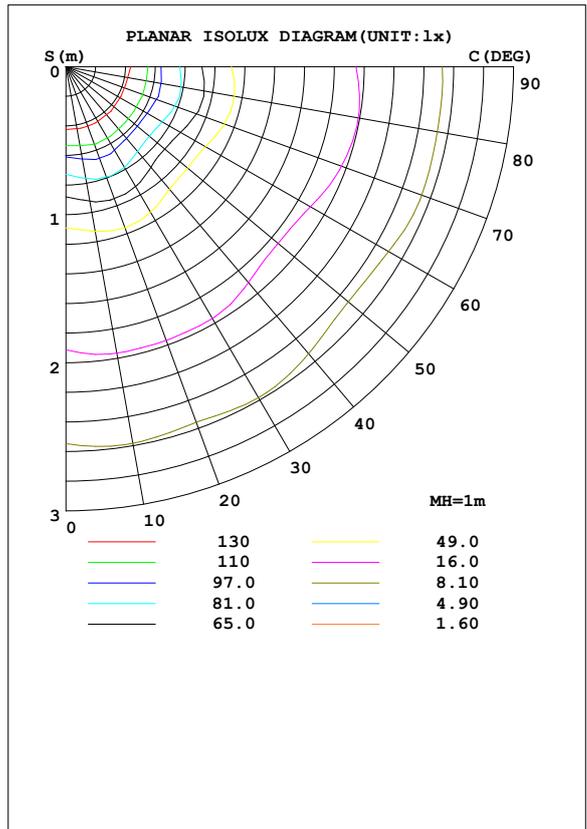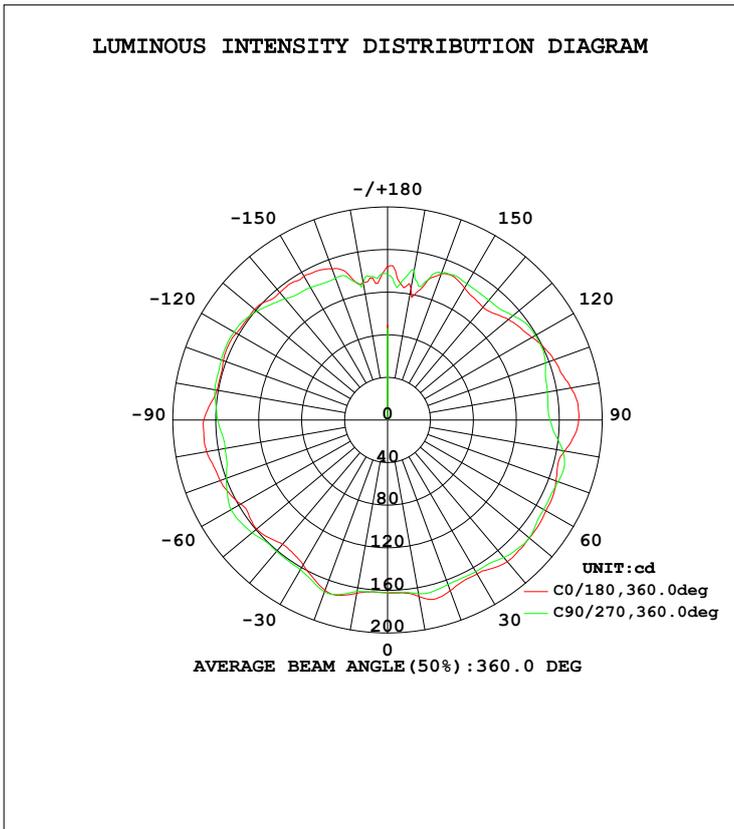


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2017-03-19

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM  
AND LUMINANCE LIMITATION CURVES**

ZONAL FLUX DIAGRAM:

| $\gamma$ | C0                    | C45   | C90   | C135  | C180  | C225  | C270  | C315  | $\gamma$ | $\Phi$ zone | $\Phi$ total | $\#lum$ |
|----------|-----------------------|-------|-------|-------|-------|-------|-------|-------|----------|-------------|--------------|---------|
| 10       | 165.2                 | 162.1 | 163.5 | 166.7 | 168.4 | 166.5 | 165.6 | 165.9 | 0- 10    | 15.59       | 15.59        | 0.76    |
| 20       | 170.3                 | 168.6 | 171.7 | 170.8 | 170.4 | 168.3 | 164.3 | 162.0 | 10- 20   | 47.70       | 63.28        | 3.1     |
| 30       | 157.2                 | 161.9 | 162.4 | 168.0 | 166.9 | 158.2 | 164.4 | 164.5 | 20- 30   | 76.55       | 139.8        | 6.86    |
| 40       | 152.4                 | 150.7 | 160.8 | 176.3 | 173.6 | 160.0 | 168.4 | 170.8 | 30- 40   | 102.7       | 242.5        | 11.9    |
| 50       | 159.3                 | 155.2 | 164.8 | 186.4 | 172.3 | 166.4 | 172.4 | 181.7 | 40- 50   | 130.0       | 372.5        | 18.3    |
| 60       | 157.9                 | 151.7 | 168.4 | 181.7 | 170.5 | 166.0 | 168.0 | 175.4 | 50- 60   | 152.2       | 524.8        | 25.7    |
| 70       | 166.1                 | 158.4 | 159.9 | 176.4 | 166.9 | 169.1 | 169.1 | 157.7 | 60- 70   | 165.3       | 690.1        | 33.8    |
| 80       | 171.3                 | 165.1 | 153.7 | 179.1 | 167.5 | 174.3 | 165.8 | 153.8 | 70- 80   | 175.5       | 865.6        | 42.5    |
| 90       | 171.1                 | 172.3 | 158.4 | 166.7 | 177.9 | 175.1 | 151.4 | 166.5 | 80- 90   | 182.8       | 1048         | 51.4    |
| 100      | 161.5                 | 165.6 | 163.4 | 156.5 | 173.3 | 163.0 | 151.2 | 168.5 | 90-100   | 180.8       | 1229         | 60.3    |
| 110      | 162.7                 | 162.6 | 164.9 | 159.0 | 165.0 | 157.3 | 156.6 | 170.5 | 100-110  | 172.0       | 1401         | 68.7    |
| 120      | 162.9                 | 153.7 | 165.2 | 170.6 | 155.3 | 150.4 | 159.1 | 176.4 | 110-120  | 161.4       | 1563         | 76.6    |
| 130      | 161.8                 | 153.1 | 159.0 | 178.1 | 147.1 | 146.8 | 152.6 | 164.3 | 120-130  | 144.5       | 1707         | 83.7    |
| 140      | 156.3                 | 148.1 | 148.7 | 165.9 | 138.3 | 140.3 | 146.9 | 153.2 | 130-140  | 118.7       | 1826         | 89.5    |
| 150      | 155.9                 | 145.4 | 143.8 | 157.6 | 143.3 | 148.6 | 147.7 | 145.5 | 140-150  | 93.16       | 1919         | 94.1    |
| 160      | 150.7                 | 150.5 | 141.8 | 150.8 | 145.8 | 148.1 | 146.0 | 138.2 | 150-160  | 68.72       | 1988         | 97.5    |
| 170      | 131.4                 | 122.6 | 130.4 | 143.6 | 125.9 | 118.8 | 142.9 | 132.5 | 160-170  | 38.58       | 2026         | 99.4    |
| 180      | 144.6                 | 158.3 | 137.5 | 131.5 | 143.7 | 155.4 | 135.5 | 136.0 | 170-180  | 12.65       | 2039         | 100     |
| DEG      | LUMINOUS INTENSITY:cd |       |       |       |       |       |       |       |          | UNIT:lm     |              |         |

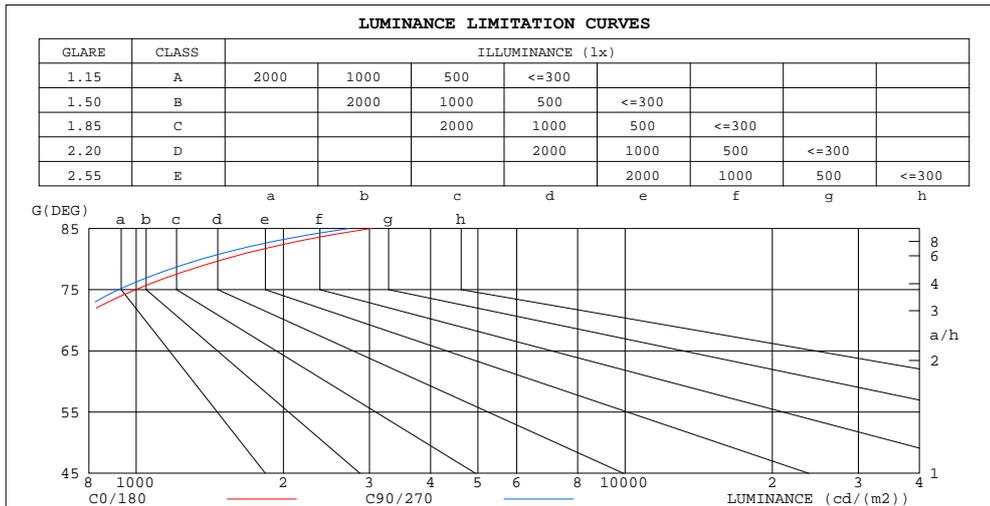

| LUMINANCE cd/(m2) |        |         |
|-------------------|--------|---------|
| G(DEG)            | C0/180 | C90/270 |
| 85                | 3032   | 2731    |
| 80                | 1518   | 1362    |
| 75                | 998    | 920     |
| 70                | 747    | 719     |
| 65                | 592    | 599     |
| 60                | 486    | 518     |
| 55                | 422    | 449     |
| 50                | 381    | 395     |
| 45                | 340    | 351     |


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2017-03-19

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

|   |                       |                   |
|---|-----------------------|-------------------|
| Test:U:120.0V I:0.3352A P:40.13W PF:0.9967 Lamp Flux:2038.87x1 lm |                       |                   |
| NAME:   | TYPE:DOT-27C-PC or EG | WEIGHT:           |
| SPEC.:  | DIM.:                 | SERIAL No.:       |
| MFR.: Blackjack Lighting  | SUR.:0.45*0.45*.314   | PROTECTION ANGLE: |

| pcc  | 80%                   |      |      | 70% |     |     | 50%                             |     |     | 30% |     |     | 10% |     |     | 0   |
|------|-----------------------|------|------|-----|-----|-----|---------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|      | 50%                   | 30%  | 10%  | 50% | 30% | 10% | 50%                             | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0   |
| pw   |                       |      |      |     |     |     |                                 |     |     |     |     |     |     |     |     |     |
| pfc  | 20%                   |      |      | 20% |     |     | 20%                             |     |     | 20% |     |     | 20% |     |     | 0   |
| RCR  | RCR:Room Cavity Ratio |      |      |     |     |     | Coefficients of Utilization(CU) |     |     |     |     |     |     |     |     |     |
| 0.0  | 1.07                  | 1.07 | 1.07 | .99 | .99 | .99 | .84                             | .84 | .84 | .70 | .70 | .70 | .57 | .57 | .57 | .51 |
| 1.0  | .88                   | .82  | .77  | .80 | .76 | .71 | .67                             | .64 | .60 | .55 | .52 | .50 | .44 | .42 | .40 | .34 |
| 2.0  | .74                   | .66  | .60  | .68 | .61 | .55 | .57                             | .51 | .47 | .46 | .42 | .38 | .36 | .33 | .31 | .26 |
| 3.0  | .64                   | .55  | .48  | .59 | .51 | .44 | .49                             | .43 | .37 | .39 | .35 | .31 | .31 | .27 | .24 | .20 |
| 4.0  | .56                   | .47  | .39  | .51 | .43 | .37 | .43                             | .36 | .31 | .34 | .29 | .25 | .27 | .23 | .20 | .16 |
| 5.0  | .49                   | .40  | .33  | .45 | .37 | .31 | .38                             | .31 | .26 | .31 | .25 | .21 | .24 | .20 | .17 | .13 |
| 6.0  | .44                   | .35  | .28  | .40 | .32 | .26 | .34                             | .27 | .22 | .27 | .22 | .18 | .21 | .17 | .14 | .11 |
| 7.0  | .39                   | .30  | .24  | .36 | .28 | .23 | .30                             | .24 | .19 | .25 | .20 | .16 | .19 | .15 | .12 | .10 |
| 8.0  | .35                   | .27  | .21  | .33 | .25 | .20 | .27                             | .21 | .17 | .22 | .17 | .14 | .18 | .14 | .11 | .08 |
| 9.0  | .32                   | .24  | .19  | .30 | .22 | .17 | .25                             | .19 | .15 | .21 | .16 | .12 | .16 | .12 | .10 | .07 |
| 10.0 | .29                   | .22  | .17  | .27 | .20 | .15 | .23                             | .17 | .13 | .19 | .14 | .11 | .15 | .11 | .09 | .07 |

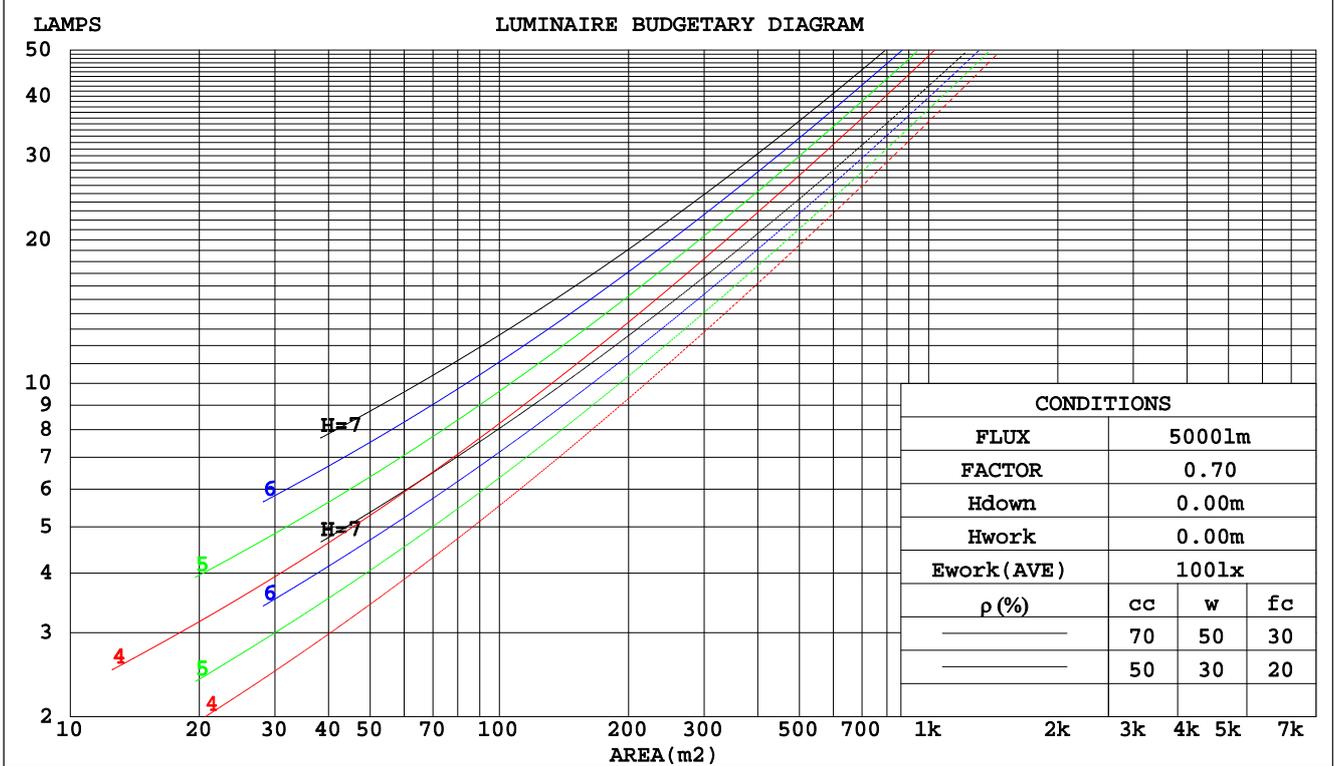

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2017-03-19

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

WEC AND CCEC

|   |                       |                   |
|---|-----------------------|-------------------|
| Test:U:120.0V I:0.3352A P:40.13W PF:0.9967 Lamp Flux:2038.87x1 lm |                       |                   |
| NAME:   | TYPE:DOT-27C-PC or EG | WEIGHT:           |
| SPEC.:  | DIM.:                 | SERIAL No.:       |
| MFR.: Blackjack Lighting  | SUR.:0.45*0.45*.314   | PROTECTION ANGLE: |

| ρcc  | 80%                   |      |      | 70%  |      |      | 50%                             |      |      | 30%  |      |      | 10%  |      |      | 0 |
|------|-----------------------|------|------|------|------|------|---------------------------------|------|------|------|------|------|------|------|------|---|
| ρw   | 50%                   | 30%  | 10%  | 50%  | 30%  | 10%  | 50%                             | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0 |
| ρfc  | 20%                   |      |      | 20%  |      |      | 20%                             |      |      | 20%  |      |      | 20%  |      |      | 0 |
| RCR  | RCR:Room Cavity Ratio |      |      |      |      |      | Wall Exitance Coefficients(WEC) |      |      |      |      |      |      |      |      |   |
| 0.0  |                       |      |      |      |      |      |                                 |      |      |      |      |      |      |      |      |   |
| 1.0  | .399                  | .227 | .072 | .377 | .215 | .068 | .336                            | .193 | .062 | .298 | .172 | .055 | .263 | .153 | .049 |   |
| 2.0  | .335                  | .184 | .056 | .315 | .173 | .053 | .277                            | .154 | .048 | .243 | .136 | .043 | .211 | .119 | .038 |   |
| 3.0  | .293                  | .156 | .047 | .275 | .147 | .044 | .240                            | .130 | .040 | .209 | .114 | .035 | .179 | .099 | .031 |   |
| 4.0  | .262                  | .136 | .040 | .245 | .128 | .038 | .213                            | .113 | .034 | .184 | .099 | .030 | .157 | .085 | .026 |   |
| 5.0  | .237                  | .121 | .035 | .221 | .114 | .033 | .192                            | .100 | .029 | .165 | .087 | .026 | .140 | .075 | .022 |   |
| 6.0  | .216                  | .108 | .031 | .202 | .102 | .029 | .175                            | .090 | .026 | .150 | .078 | .023 | .127 | .067 | .020 |   |
| 7.0  | .199                  | .098 | .028 | .186 | .092 | .026 | .161                            | .081 | .023 | .138 | .071 | .021 | .116 | .060 | .018 |   |
| 8.0  | .184                  | .090 | .025 | .172 | .085 | .024 | .149                            | .074 | .021 | .127 | .064 | .019 | .107 | .055 | .016 |   |
| 9.0  | .171                  | .083 | .023 | .160 | .078 | .022 | .138                            | .068 | .019 | .118 | .059 | .017 | .099 | .050 | .015 |   |
| 10.0 | .160                  | .077 | .021 | .149 | .072 | .020 | .129                            | .063 | .018 | .110 | .055 | .016 | .093 | .047 | .013 |   |

| ρcc  | 80%                   |      |      | 70%  |      |      | 50%  |      |      | 30%  |      |      | 10%  |      |      | 0 |
|------|-----------------------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|---|
| ρw   | 50%                   | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0 |
| ρfc  | 20%                   |      |      | 20%  |      |      | 20%  |      |      | 20%  |      |      | 20%  |      |      | 0 |
| RCR  | RCR:Room Cavity Ratio |      |      |      |      |      | Ceiling Cavity Exitance Coefficients(CCEC) |      |      |      |      |      |      |      |      |   |
| 0.0  | .561                  | .561 | .561 | .479 | .479 | .479 | .327                                       | .327 | .327 | .188 | .188 | .188 | .060 | .060 | .060 |   |
| 1.0  | .560                  | .529 | .501 | .479 | .454 | .431 | .328                                       | .312 | .298 | .189 | .181 | .173 | .060 | .058 | .056 |   |
| 2.0  | .554                  | .507 | .468 | .474 | .437 | .405 | .325                                       | .302 | .282 | .187 | .176 | .166 | .060 | .057 | .054 |   |
| 3.0  | .547                  | .492 | .449 | .469 | .425 | .389 | .322                                       | .295 | .273 | .186 | .172 | .161 | .060 | .056 | .053 |   |
| 4.0  | .539                  | .481 | .436 | .463 | .415 | .379 | .318                                       | .289 | .267 | .184 | .170 | .158 | .059 | .055 | .052 |   |
| 5.0  | .532                  | .472 | .427 | .457 | .408 | .371 | .315                                       | .285 | .262 | .182 | .167 | .156 | .059 | .055 | .051 |   |
| 6.0  | .525                  | .464 | .421 | .451 | .402 | .366 | .311                                       | .281 | .259 | .181 | .166 | .154 | .058 | .054 | .051 |   |
| 7.0  | .518                  | .458 | .416 | .446 | .397 | .363 | .308                                       | .278 | .257 | .179 | .164 | .153 | .058 | .054 | .051 |   |
| 8.0  | .512                  | .453 | .413 | .441 | .393 | .360 | .305                                       | .276 | .255 | .177 | .163 | .152 | .057 | .053 | .050 |   |
| 9.0  | .506                  | .448 | .410 | .436 | .389 | .357 | .302                                       | .274 | .254 | .176 | .162 | .151 | .057 | .053 | .050 |   |
| 10.0 | .500                  | .445 | .408 | .431 | .386 | .356 | .299                                       | .272 | .253 | .174 | .161 | .151 | .057 | .053 | .050 |   |

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2017-03-19

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

|   |                  |      |      |      |                       |                |      |                   |      |      |
|---|------------------|------|------|------|-----------------------|----------------|------|-------------------|------|------|
| Test:U:120.0V I:0.3352A P:40.13W PF:0.9967 Lamp Flux:2038.87x1 lm |                  |      |      |      |                       |                |      |                   |      |      |
| NAME:   |                  |      |      |      | TYPE:DOT-27C-PC or EG |                |      | WEIGHT:           |      |      |
| SPEC.:  |                  |      |      |      | DIM.:                 |                |      | SERIAL No.:       |      |      |
| MFR.: Blackjack Lighting  |                  |      |      |      | SUR.:0.45*0.45*.314   |                |      | PROTECTION ANGLE: |      |      |
| ceiling/cavity  | 0.7              | 0.7  | 0.5  | 0.5  | 0.3                   | 0.7            | 0.7  | 0.5               | 0.5  | 0.3  |
| walls   | 0.5              | 0.3  | 0.5  | 0.3  | 0.3                   | 0.5            | 0.3  | 0.5               | 0.3  | 0.3  |
| working plane   | 0.2              | 0.2  | 0.2  | 0.2  | 0.2                   | 0.2            | 0.2  | 0.2               | 0.2  | 0.2  |
| Room dimensions   | Viewed crosswise |      |      |      |                       | Viewed endwise |      |                   |      |      |
| x = 2H y = 2H   | 7.0              | 8.1  | 7.9  | 9.0  | 10.1                  | 7.1            | 8.1  | 7.9               | 9.0  | 10.1 |
| 3H  | 10.2             | 11.2 | 11.0 | 12.1 | 13.2                  | 10.0           | 11.0 | 10.9              | 11.9 | 13.0 |
| 4H  | 12.0             | 12.9 | 12.9 | 13.8 | 15.0                  | 11.6           | 12.5 | 12.5              | 13.5 | 14.6 |
| 6H  | 14.1             | 14.9 | 15.0 | 15.9 | 17.0                  | 13.5           | 14.3 | 14.4              | 15.2 | 16.4 |
| 8H  | 15.2             | 16.0 | 16.1 | 17.0 | 18.2                  | 14.5           | 15.4 | 15.4              | 16.3 | 17.5 |
| 12H   | 16.5             | 17.3 | 17.4 | 18.3 | 19.5                  | 15.8           | 16.6 | 16.7              | 17.5 | 18.7 |
| 4H 2H   | 7.8              | 8.8  | 8.7  | 9.7  | 10.9                  | 7.8            | 8.8  | 8.7               | 9.7  | 10.8 |
| 3H  | 11.2             | 12.0 | 12.1 | 13.0 | 14.2                  | 11.0           | 11.8 | 11.9              | 12.7 | 14.0 |
| 4H  | 13.2             | 13.9 | 14.1 | 14.9 | 16.1                  | 12.8           | 13.5 | 13.7              | 14.5 | 15.7 |
| 6H  | 15.4             | 16.1 | 16.4 | 17.0 | 18.3                  | 14.8           | 15.5 | 15.8              | 16.4 | 17.7 |
| 8H  | 16.7             | 17.3 | 17.6 | 18.2 | 19.5                  | 16.0           | 16.6 | 16.9              | 17.6 | 18.8 |
| 12H   | 18.1             | 18.6 | 19.0 | 19.6 | 20.9                  | 17.3           | 17.9 | 18.3              | 18.9 | 20.1 |
| 8H 4H   | 13.8             | 14.5 | 14.8 | 15.4 | 16.7                  | 13.5           | 14.1 | 14.5              | 15.1 | 16.4 |
| 6H  | 16.4             | 16.9 | 17.4 | 17.9 | 19.2                  | 15.8           | 16.3 | 16.8              | 17.3 | 18.6 |
| 8H  | 17.8             | 18.3 | 18.8 | 19.3 | 20.6                  | 17.2           | 17.6 | 18.2              | 18.6 | 20.0 |
| 12H   | 19.4             | 19.8 | 20.4 | 20.8 | 22.2                  | 18.7           | 19.1 | 19.7              | 20.1 | 21.5 |
| 12H 4H  | 14.0             | 14.6 | 15.0 | 15.6 | 16.9                  | 13.8           | 14.3 | 14.7              | 15.3 | 16.6 |
| 6H  | 16.7             | 17.1 | 17.7 | 18.1 | 19.5                  | 16.2           | 16.7 | 17.2              | 17.7 | 19.0 |
| 8H  | 18.2             | 18.6 | 19.2 | 19.7 | 21.0                  | 17.6           | 18.1 | 18.7              | 19.1 | 20.4 |
| Variations with the observer position at spacings:                |                  |      |      |      |                       |                |      |                   |      |      |
| S = 1.0H  | + 0.1 / - 0.1    |      |      |      |                       | + 0.1 / - 0.1  |      |                   |      |      |
| 1.5H  | + 0.2 / - 0.3    |      |      |      |                       | + 0.2 / - 0.3  |      |                   |      |      |
| 2.0H  | + 0.3 / - 0.4    |      |      |      |                       | + 0.3 / - 0.4  |      |                   |      |      |

CIE Pub.117 Corrected 2039 lm Total Lamp Luminous Flux.(8log(F/F0) = 2.5)

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2017-03-19

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

UTILIZATION FACTORS TABLE

|   |                       |                   |
|---|-----------------------|-------------------|
| Test:U:120.0V I:0.3352A P:40.13W PF:0.9967 Lamp Flux:2038.87x1 lm |                       |                   |
| NAME:   | TYPE:DOT-27C-PC or EG | WEIGHT:           |
| SPEC.:  | DIM.:                 | SERIAL No.:       |
| MFR.: Blackjack Lighting  | SUR.:0.45*0.45*.314   | PROTECTION ANGLE: |

| REFLECTANCE                      |   |     |           |     |     |     |               |     |     |        |
|----------------------------------|---|-----|-----------|-----|-----|-----|---------------|-----|-----|--------|
| Ceiling                          | 0.8   | 0.8 | 0.8       | 0.7 | 0.7 | 0.7 | 0.5           | 0.5 | 0.5 | 0      |
| Walls                            | 0.7   | 0.5 | 0.3       | 0.7 | 0.5 | 0.3 | 0.7           | 0.5 | 0.3 | 0      |
| Working plane                    | 0.2   | 0.2 | 0.2       | 0.2 | 0.2 | 0.2 | 0.2           | 0.2 | 0.2 | 0      |
| ROOM INDEX                       | UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$ |     |           |     |     |     |               |     |     |        |
| k = 0.60                         | 37  | 25  | 18        | 35  | 24  | 17  | 32            | 22  | 16  | 8      |
| 0.80                             | 46  | 32  | 24        | 43  | 31  | 23  | 38            | 28  | 21  | 11     |
| 1.00                             | 53  | 39  | 30        | 50  | 37  | 29  | 43            | 35  | 26  | 15     |
| 1.25                             | 60  | 46  | 37        | 56  | 43  | 35  | 48            | 38  | 31  | 18     |
| 1.50                             | 65  | 52  | 42        | 61  | 48  | 40  | 52            | 42  | 35  | 20     |
| 2.00                             | 73  | 60  | 51        | 67  | 56  | 48  | 58            | 49  | 42  | 24     |
| 2.50                             | 78  | 66  | 57        | 72  | 62  | 54  | 61            | 53  | 47  | 27     |
| 3.00                             | 82  | 71  | 63        | 76  | 66  | 59  | 64            | 57  | 51  | 29     |
| 4.00                             | 87  | 78  | 70        | 80  | 72  | 65  | 68            | 62  | 56  | 33     |
| 5.00                             | 90  | 82  | 75        | 83  | 76  | 70  | 70            | 65  | 60  | 35     |
| ROOM INDEX                       | UF(total)   |     |           |     |     |     |               |     |     | Direct |
| According to DIN EN 13032-2 2004 |   |     | Suspended |     |     |     | SHRNOM = 1.25 |     |     |        |

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2017-03-19

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

|   |                       |                   |
|---|-----------------------|-------------------|
| Test:U:120.0V I:0.3352A P:40.13W PF:0.9967 Lamp Flux:2038.87x1 lm |                       |                   |
| NAME:   | TYPE:DOT-27C-PC or EG | WEIGHT:           |
| SPEC.:  | DIM.:                 | SERIAL No.:       |
| MFR.: Blackjack Lighting  | SUR.:0.45*0.45*.314   | PROTECTION ANGLE: |

Conical surface Flux(90deg):

304.08 lm

%lum = 14.9%


%lamp = 14.9%

Conical surface Flux(70deg):

524.75 lm

%lum = 25.7%

%lamp = 25.7%

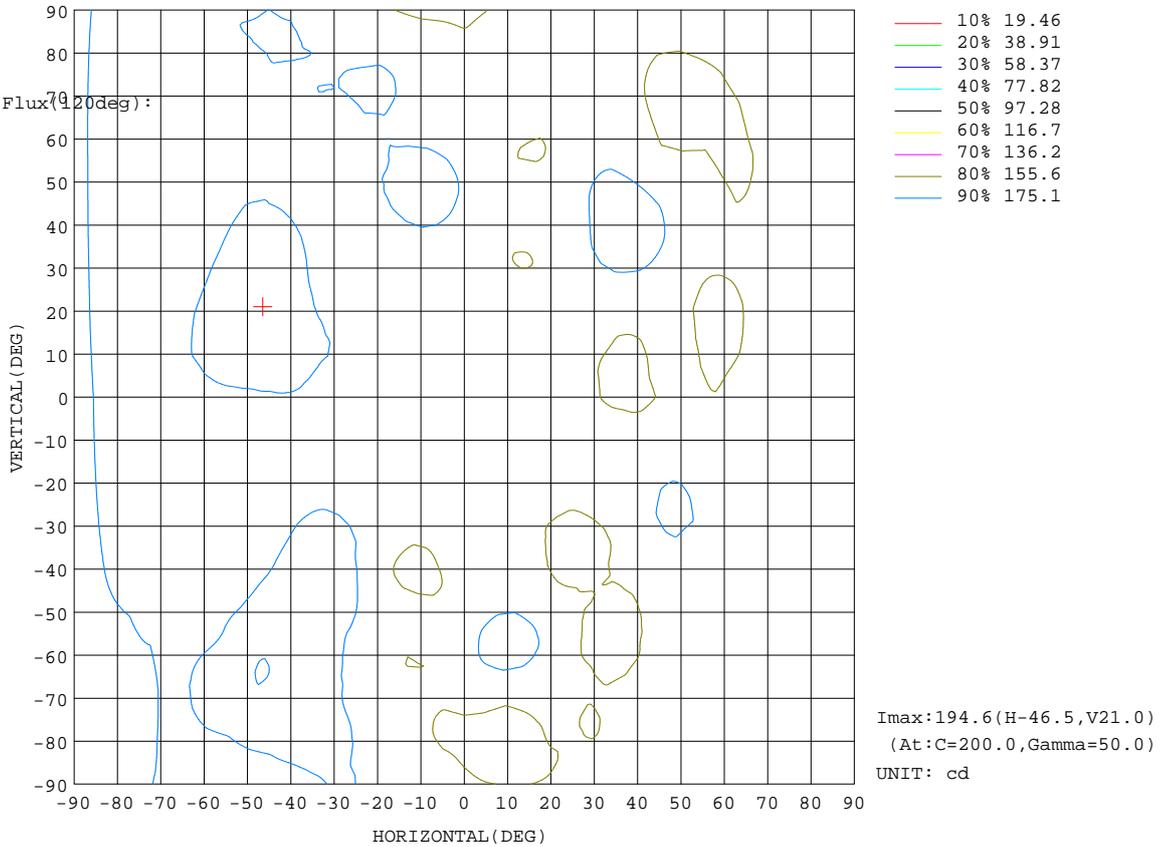


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25.6DEG  
 Operators: David  
 Test Date: 2017-03-19

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.287  
 Humidity: 67.1%  
 Test Distance: 26.000m [K=1.0000]  
 Remarks:

AAI Figure

|   |                       |                   |
|---|-----------------------|-------------------|
| Test:U:120.0V I:0.3352A P:40.13W PF:0.9967 Lamp Flux:2038.87x1 lm |                       |                   |
| NAME:   | TYPE:DOT-27C-PC or EG | WEIGHT:           |
| SPEC.:  | DIM.:                 | SERIAL No.:       |
| MFR.: Blackjack Lighting  | SUR.:0.45*0.45*.314   | PROTECTION ANGLE: |

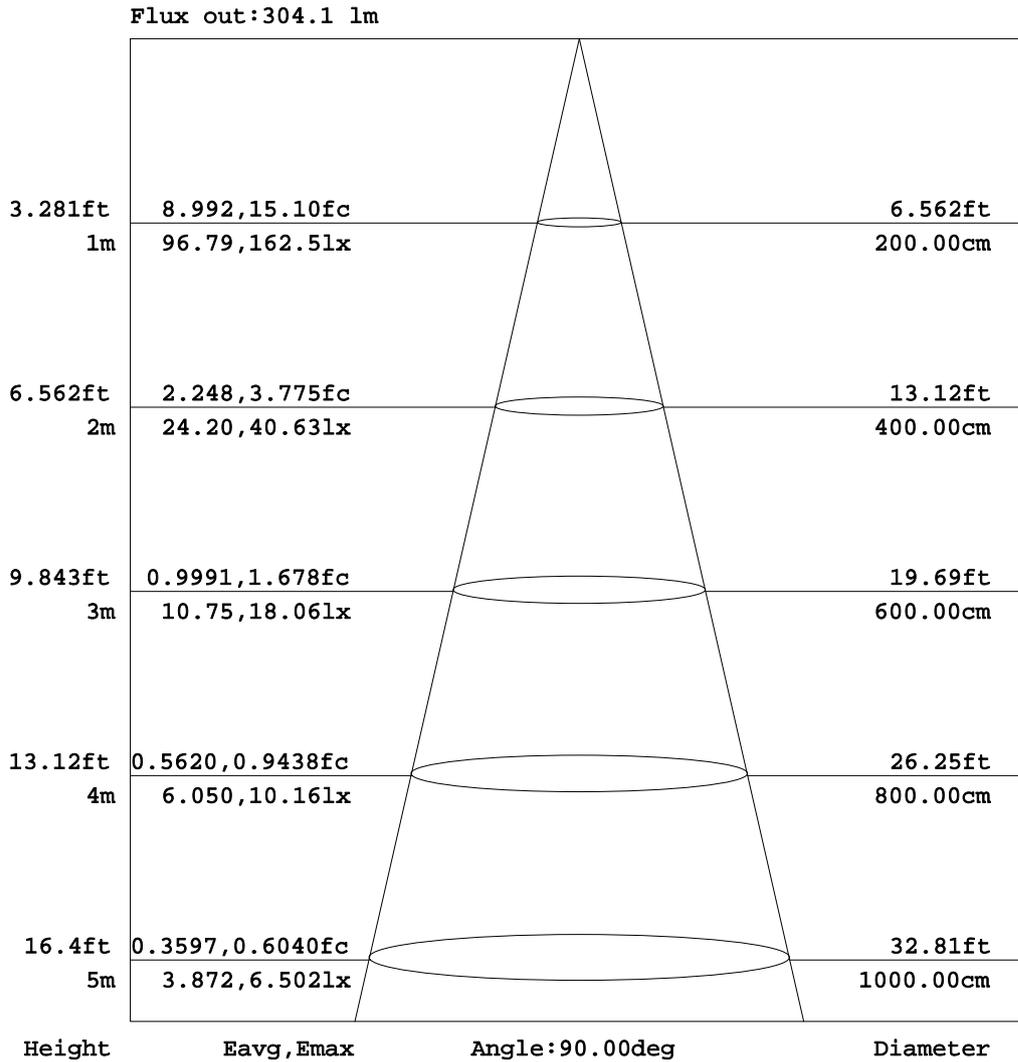


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2017-03-19

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM


|   |                       |                   |
|---|-----------------------|-------------------|
| Test:U:120.0V I:0.3352A P:40.13W PF:0.9967 Lamp Flux:2038.87x1 lm |                       |                   |
| NAME:   | TYPE:DOT-27C-PC or EG | WEIGHT:           |
| SPEC.:  | DIM.:                 | SERIAL No.:       |
| MFR.: Blackjack Lighting  | SUR.:0.45*0.45*.314   | PROTECTION ANGLE: |

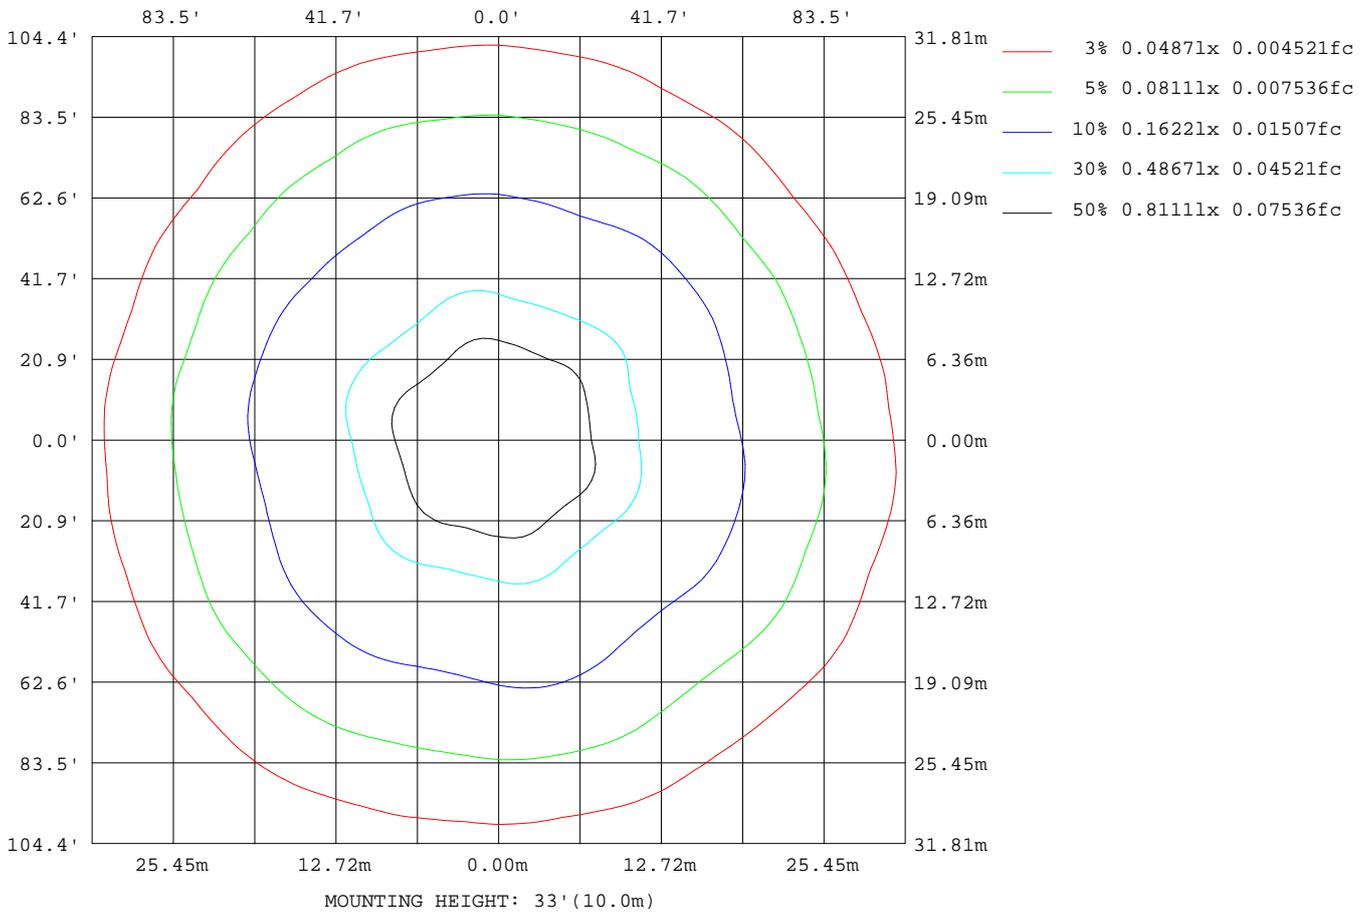

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2017-03-19

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

### Planar Illuminance Curve

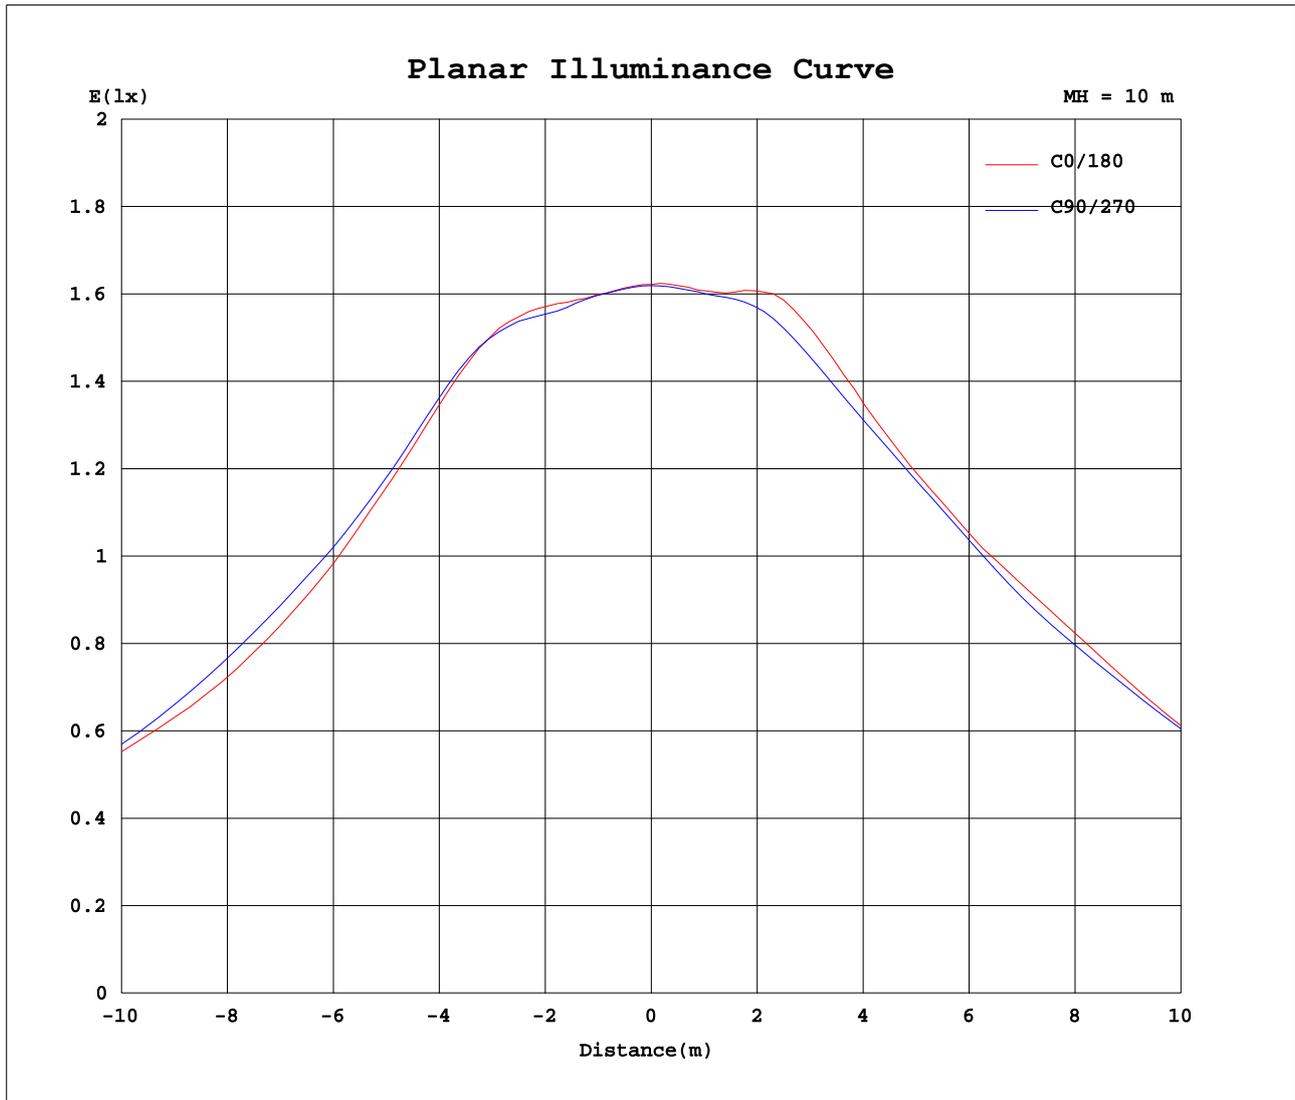

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature: 25.6DEG  
Operators: David  
Test Date: 2017-03-19

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.287  
Humidity: 67.1%  
Test Distance: 26.000m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

|   |                       |                   |
|---|-----------------------|-------------------|
| Test:U:120.0V I:0.3352A P:40.13W PF:0.9967 Lamp Flux:2038.87x1 lm |                       |                   |
| NAME:   | TYPE:DOT-27C-PC or EG | WEIGHT:           |
| SPEC.:  | DIM.:                 | SERIAL No.:       |
| MFR.: Blackjack Lighting  | SUR.:0.45*0.45*.314   | PROTECTION ANGLE: |

Table--1

UNIT: cd

| C (DEG)<br>γ (DEG) | 0   | 5   | 10  | 15  | 20  | 25  | 30  | 35  | 40  | 45  | 50  | 55  | 60  | 65  | 70  | 75  | 80  | 85  | 90  |
|--------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 0                  | 162 | 162 | 162 | 162 | 163 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 |
| 5                  | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 |
| 10                 | 165 | 165 | 165 | 164 | 163 | 163 | 163 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 163 | 163 | 162 | 162 | 163 |
| 15                 | 171 | 170 | 170 | 170 | 169 | 168 | 167 | 167 | 166 | 166 | 166 | 166 | 165 | 166 | 166 | 167 | 167 | 168 | 169 |
| 20                 | 170 | 170 | 170 | 170 | 169 | 169 | 169 | 169 | 169 | 169 | 169 | 168 | 168 | 167 | 168 | 168 | 169 | 170 | 172 |
| 25                 | 164 | 164 | 165 | 165 | 166 | 166 | 167 | 166 | 165 | 165 | 166 | 166 | 165 | 164 | 164 | 164 | 164 | 165 | 167 |
| 30                 | 157 | 158 | 161 | 163 | 166 | 166 | 165 | 164 | 162 | 162 | 162 | 161 | 161 | 162 | 163 | 164 | 163 | 162 | 162 |
| 35                 | 153 | 156 | 162 | 165 | 168 | 168 | 166 | 162 | 158 | 156 | 155 | 156 | 158 | 161 | 165 | 166 | 165 | 163 | 161 |
| 40                 | 152 | 156 | 162 | 167 | 169 | 169 | 167 | 162 | 155 | 151 | 150 | 152 | 156 | 161 | 166 | 168 | 167 | 164 | 161 |
| 45                 | 156 | 160 | 166 | 170 | 171 | 170 | 167 | 161 | 155 | 152 | 151 | 151 | 155 | 161 | 167 | 170 | 169 | 166 | 161 |
| 50                 | 159 | 163 | 168 | 173 | 176 | 175 | 170 | 163 | 158 | 155 | 154 | 156 | 158 | 164 | 170 | 173 | 174 | 170 | 165 |
| 55                 | 157 | 163 | 169 | 174 | 177 | 176 | 172 | 164 | 158 | 154 | 154 | 155 | 159 | 166 | 175 | 180 | 181 | 176 | 167 |
| 60                 | 158 | 165 | 170 | 172 | 174 | 173 | 171 | 166 | 158 | 152 | 151 | 152 | 157 | 166 | 175 | 181 | 181 | 177 | 168 |
| 65                 | 163 | 169 | 172 | 171 | 170 | 170 | 171 | 168 | 160 | 154 | 150 | 152 | 157 | 164 | 169 | 172 | 172 | 170 | 165 |
| 70                 | 166 | 171 | 172 | 169 | 167 | 169 | 172 | 169 | 163 | 158 | 156 | 155 | 158 | 162 | 162 | 160 | 159 | 160 | 160 |
| 75                 | 168 | 172 | 171 | 168 | 166 | 168 | 172 | 170 | 164 | 162 | 161 | 157 | 155 | 157 | 158 | 155 | 152 | 154 | 155 |
| 80                 | 171 | 174 | 173 | 170 | 171 | 172 | 175 | 173 | 167 | 165 | 163 | 158 | 155 | 157 | 156 | 152 | 150 | 152 | 154 |
| 85                 | 172 | 170 | 169 | 169 | 171 | 171 | 173 | 172 | 170 | 169 | 168 | 165 | 160 | 158 | 155 | 151 | 150 | 151 | 155 |
| 90                 | 171 | 166 | 163 | 163 | 163 | 164 | 166 | 171 | 172 | 172 | 170 | 167 | 163 | 158 | 155 | 155 | 156 | 158 | 158 |
| 95                 | 166 | 161 | 158 | 156 | 156 | 158 | 161 | 167 | 168 | 170 | 172 | 171 | 169 | 166 | 164 | 164 | 163 | 162 | 160 |
| 100                | 161 | 161 | 158 | 156 | 156 | 157 | 160 | 162 | 163 | 166 | 167 | 168 | 167 | 168 | 168 | 167 | 166 | 164 | 163 |
| 105                | 161 | 162 | 159 | 156 | 156 | 159 | 162 | 161 | 159 | 163 | 165 | 165 | 163 | 166 | 168 | 165 | 164 | 163 | 164 |
| 110                | 163 | 164 | 162 | 158 | 159 | 162 | 163 | 161 | 159 | 163 | 164 | 162 | 163 | 167 | 169 | 166 | 163 | 164 | 165 |
| 115                | 164 | 167 | 166 | 162 | 162 | 165 | 167 | 164 | 160 | 159 | 158 | 160 | 163 | 167 | 170 | 169 | 165 | 166 | 166 |
| 120                | 163 | 169 | 171 | 171 | 171 | 171 | 170 | 164 | 158 | 154 | 154 | 159 | 162 | 166 | 170 | 170 | 169 | 167 | 165 |
| 125                | 162 | 170 | 177 | 181 | 180 | 176 | 170 | 160 | 152 | 151 | 153 | 156 | 159 | 164 | 168 | 170 | 171 | 168 | 163 |
| 130                | 162 | 169 | 178 | 182 | 180 | 172 | 164 | 156 | 153 | 153 | 153 | 153 | 155 | 158 | 163 | 168 | 169 | 166 | 159 |
| 135                | 158 | 165 | 171 | 171 | 167 | 161 | 156 | 154 | 154 | 153 | 152 | 151 | 151 | 151 | 154 | 160 | 162 | 159 | 154 |
| 140                | 156 | 162 | 166 | 166 | 162 | 157 | 153 | 151 | 150 | 148 | 146 | 145 | 145 | 144 | 146 | 149 | 151 | 150 | 149 |
| 145                | 157 | 160 | 162 | 162 | 161 | 158 | 154 | 150 | 147 | 145 | 143 | 141 | 141 | 141 | 143 | 145 | 146 | 145 | 145 |
| 150                | 156 | 157 | 158 | 159 | 159 | 157 | 155 | 152 | 149 | 145 | 144 | 142 | 141 | 142 | 142 | 142 | 141 | 142 | 144 |
| 155                | 155 | 153 | 154 | 155 | 155 | 156 | 156 | 154 | 152 | 148 | 145 | 143 | 143 | 142 | 142 | 141 | 139 | 140 | 142 |
| 160                | 151 | 150 | 150 | 151 | 151 | 153 | 153 | 153 | 152 | 151 | 148 | 146 | 144 | 142 | 141 | 141 | 140 | 140 | 142 |
| 165                | 142 | 141 | 142 | 143 | 144 | 144 | 145 | 145 | 145 | 143 | 142 | 139 | 135 | 131 | 132 | 132 | 132 | 134 | 137 |
| 170                | 131 | 136 | 139 | 141 | 138 | 138 | 133 | 125 | 123 | 123 | 119 | 119 | 121 | 125 | 130 | 134 | 133 | 130 | 130 |
| 175                | 129 | 132 | 134 | 135 | 135 | 133 | 131 | 130 | 131 | 135 | 139 | 140 | 141 | 143 | 144 | 144 | 142 | 139 | 134 |
| 180                | 145 | 146 | 143 | 139 | 137 | 141 | 149 | 159 | 160 | 158 | 154 | 154 | 157 | 157 | 149 | 139 | 133 | 134 | 138 |

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2017-03-19

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

|   |                       |                   |
|---|-----------------------|-------------------|
| Test:U:120.0V I:0.3352A P:40.13W PF:0.9967 Lamp Flux:2038.87x1 lm |                       |                   |
| NAME:   | TYPE:DOT-27C-PC or EG | WEIGHT:           |
| SPEC.:  | DIM.:                 | SERIAL No.:       |
| MFR.: Blackjack Lighting  | SUR.:0.45*0.45*.314   | PROTECTION ANGLE: |

Table--2

UNIT: cd

| C (DEG)<br>γ (DEG) | 95  | 100 | 105 | 110 | 115 | 120 | 125 | 130 | 135 | 140 | 145 | 150 | 155 | 160 | 165 | 170 | 175 | 180 | 185 |
|--------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 0                  | 162 | 162 | 162 | 161 | 162 | 162 | 162 | 161 | 161 | 162 | 162 | 161 | 161 | 161 | 162 | 162 | 162 | 162 | 162 |
| 5                  | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 163 | 163 | 163 |
| 10                 | 164 | 164 | 165 | 166 | 166 | 166 | 167 | 167 | 167 | 167 | 168 | 168 | 168 | 168 | 169 | 169 | 168 | 168 | 168 |
| 15                 | 170 | 171 | 171 | 171 | 171 | 171 | 171 | 171 | 172 | 173 | 173 | 174 | 174 | 174 | 174 | 174 | 173 | 174 | 173 |
| 20                 | 173 | 173 | 173 | 172 | 172 | 171 | 171 | 170 | 171 | 172 | 173 | 173 | 173 | 173 | 172 | 172 | 171 | 170 | 170 |
| 25                 | 167 | 168 | 169 | 168 | 167 | 167 | 167 | 167 | 167 | 167 | 167 | 168 | 169 | 169 | 169 | 168 | 167 | 167 | 167 |
| 30                 | 163 | 163 | 163 | 163 | 164 | 165 | 167 | 168 | 168 | 167 | 165 | 164 | 164 | 164 | 164 | 164 | 165 | 167 | 169 |
| 35                 | 160 | 158 | 157 | 157 | 159 | 164 | 168 | 170 | 171 | 170 | 168 | 166 | 165 | 163 | 163 | 165 | 167 | 170 | 173 |
| 40                 | 158 | 155 | 153 | 152 | 156 | 163 | 170 | 174 | 176 | 177 | 174 | 171 | 168 | 166 | 165 | 166 | 169 | 174 | 179 |
| 45                 | 157 | 154 | 154 | 154 | 158 | 165 | 173 | 179 | 182 | 182 | 179 | 173 | 168 | 166 | 166 | 167 | 168 | 173 | 181 |
| 50                 | 160 | 158 | 158 | 159 | 163 | 171 | 178 | 184 | 186 | 185 | 179 | 171 | 166 | 165 | 165 | 166 | 168 | 172 | 181 |
| 55                 | 161 | 159 | 159 | 160 | 166 | 174 | 179 | 183 | 186 | 184 | 179 | 170 | 163 | 161 | 161 | 163 | 165 | 172 | 180 |
| 60                 | 160 | 157 | 156 | 160 | 166 | 173 | 177 | 179 | 182 | 182 | 178 | 172 | 164 | 160 | 159 | 160 | 163 | 170 | 178 |
| 65                 | 159 | 156 | 157 | 161 | 168 | 174 | 178 | 178 | 178 | 179 | 178 | 174 | 168 | 164 | 161 | 162 | 165 | 170 | 174 |
| 70                 | 158 | 158 | 161 | 164 | 169 | 175 | 178 | 178 | 176 | 175 | 178 | 176 | 171 | 167 | 166 | 166 | 165 | 167 | 169 |
| 75                 | 154 | 158 | 163 | 166 | 170 | 177 | 181 | 181 | 178 | 175 | 178 | 178 | 174 | 171 | 171 | 169 | 164 | 164 | 166 |
| 80                 | 154 | 160 | 166 | 169 | 173 | 180 | 183 | 182 | 179 | 178 | 178 | 178 | 175 | 174 | 175 | 173 | 169 | 168 | 166 |
| 85                 | 159 | 166 | 170 | 171 | 174 | 178 | 179 | 177 | 175 | 175 | 174 | 173 | 172 | 174 | 177 | 177 | 176 | 174 | 170 |
| 90                 | 164 | 169 | 172 | 173 | 175 | 176 | 172 | 168 | 167 | 166 | 166 | 165 | 169 | 174 | 177 | 178 | 178 | 178 | 174 |
| 95                 | 163 | 168 | 170 | 170 | 172 | 172 | 167 | 160 | 158 | 158 | 159 | 160 | 163 | 169 | 174 | 176 | 176 | 178 | 178 |
| 100                | 161 | 163 | 165 | 166 | 166 | 166 | 163 | 159 | 156 | 156 | 157 | 158 | 159 | 161 | 166 | 171 | 173 | 173 | 176 |
| 105                | 161 | 160 | 162 | 162 | 162 | 163 | 163 | 160 | 157 | 156 | 158 | 160 | 158 | 158 | 162 | 167 | 168 | 168 | 173 |
| 110                | 162 | 161 | 162 | 162 | 161 | 162 | 164 | 162 | 159 | 157 | 160 | 161 | 160 | 160 | 161 | 163 | 164 | 165 | 171 |
| 115                | 163 | 162 | 160 | 158 | 159 | 163 | 167 | 167 | 163 | 161 | 163 | 165 | 163 | 161 | 160 | 157 | 158 | 161 | 168 |
| 120                | 162 | 160 | 157 | 154 | 156 | 161 | 168 | 170 | 171 | 172 | 171 | 169 | 165 | 160 | 156 | 154 | 154 | 155 | 163 |
| 125                | 159 | 155 | 152 | 152 | 153 | 157 | 166 | 173 | 178 | 181 | 179 | 173 | 165 | 159 | 155 | 153 | 152 | 151 | 156 |
| 130                | 154 | 151 | 151 | 151 | 154 | 157 | 163 | 170 | 178 | 181 | 179 | 170 | 162 | 156 | 153 | 151 | 149 | 147 | 149 |
| 135                | 150 | 149 | 150 | 151 | 153 | 155 | 159 | 166 | 171 | 173 | 171 | 164 | 158 | 153 | 149 | 146 | 144 | 141 | 142 |
| 140                | 147 | 145 | 145 | 147 | 149 | 150 | 156 | 162 | 166 | 167 | 166 | 161 | 156 | 150 | 146 | 143 | 140 | 138 | 140 |
| 145                | 144 | 143 | 142 | 142 | 144 | 148 | 153 | 158 | 162 | 164 | 163 | 161 | 157 | 153 | 148 | 144 | 141 | 140 | 141 |
| 150                | 145 | 144 | 144 | 144 | 146 | 150 | 153 | 156 | 158 | 159 | 159 | 158 | 157 | 154 | 151 | 148 | 146 | 143 | 142 |
| 155                | 144 | 145 | 147 | 148 | 152 | 153 | 154 | 154 | 154 | 153 | 154 | 154 | 154 | 154 | 153 | 152 | 151 | 148 | 145 |
| 160                | 145 | 148 | 150 | 151 | 153 | 154 | 153 | 152 | 151 | 148 | 147 | 148 | 148 | 149 | 150 | 151 | 149 | 146 | 143 |
| 165                | 141 | 142 | 141 | 141 | 145 | 144 | 141 | 140 | 140 | 140 | 140 | 140 | 139 | 138 | 136 | 133 | 128 | 131 | 128 |
| 170                | 129 | 130 | 128 | 125 | 126 | 127 | 131 | 137 | 144 | 142 | 139 | 132 | 124 | 122 | 120 | 118 | 120 | 126 | 127 |
| 175                | 130 | 129 | 130 | 129 | 127 | 128 | 130 | 132 | 132 | 130 | 126 | 123 | 124 | 127 | 133 | 139 | 138 | 130 | 130 |
| 180                | 143 | 144 | 141 | 141 | 140 | 143 | 144 | 137 | 131 | 134 | 142 | 151 | 160 | 160 | 159 | 155 | 154 | 144 | 144 |

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2017-03-19

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

|   |                       |                   |
|---|-----------------------|-------------------|
| Test:U:120.0V I:0.3352A P:40.13W PF:0.9967 Lamp Flux:2038.87x1 lm |                       |                   |
| NAME:   | TYPE:DOT-27C-PC or EG | WEIGHT:           |
| SPEC.:  | DIM.:                 | SERIAL No.:       |
| MFR.: Blackjack Lighting  | SUR.:0.45*0.45*.314   | PROTECTION ANGLE: |

Table--3

UNIT: cd

| C (DEG)<br>γ (DEG) | 190 | 195 | 200 | 205 | 210 | 215 | 220 | 225 | 230 | 235 | 240 | 245 | 250 | 255 | 260 | 265 | 270 | 275 | 280 |
|--------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 0                  | 162 | 162 | 163 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 |
| 5                  | 163 | 163 | 163 | 163 | 163 | 163 | 163 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 | 162 |
| 10                 | 168 | 168 | 167 | 167 | 167 | 167 | 167 | 167 | 166 | 165 | 165 | 165 | 165 | 165 | 165 | 165 | 166 | 166 | 166 |
| 15                 | 172 | 171 | 170 | 170 | 170 | 170 | 170 | 170 | 169 | 168 | 167 | 166 | 166 | 166 | 165 | 165 | 166 | 167 | 167 |
| 20                 | 169 | 169 | 169 | 168 | 168 | 169 | 169 | 168 | 168 | 166 | 166 | 165 | 165 | 164 | 163 | 163 | 164 | 165 | 166 |
| 25                 | 169 | 170 | 170 | 169 | 168 | 166 | 165 | 164 | 163 | 162 | 163 | 165 | 166 | 167 | 166 | 165 | 164 | 163 | 163 |
| 30                 | 171 | 173 | 173 | 172 | 168 | 164 | 160 | 158 | 158 | 159 | 162 | 165 | 169 | 170 | 169 | 167 | 164 | 163 | 161 |
| 35                 | 176 | 177 | 176 | 174 | 170 | 163 | 158 | 156 | 156 | 157 | 160 | 165 | 169 | 172 | 171 | 168 | 165 | 162 | 160 |
| 40                 | 183 | 184 | 182 | 179 | 172 | 165 | 161 | 160 | 160 | 160 | 162 | 167 | 172 | 174 | 175 | 173 | 168 | 164 | 162 |
| 45                 | 187 | 190 | 190 | 187 | 181 | 173 | 166 | 164 | 163 | 163 | 166 | 172 | 178 | 182 | 182 | 178 | 171 | 165 | 162 |
| 50                 | 189 | 194 | 195 | 191 | 186 | 180 | 171 | 166 | 164 | 164 | 168 | 174 | 180 | 184 | 184 | 180 | 172 | 164 | 161 |
| 55                 | 188 | 193 | 192 | 189 | 186 | 180 | 173 | 167 | 162 | 163 | 167 | 173 | 177 | 179 | 179 | 176 | 169 | 162 | 158 |
| 60                 | 182 | 183 | 182 | 181 | 180 | 175 | 170 | 166 | 165 | 164 | 168 | 173 | 175 | 175 | 174 | 172 | 168 | 163 | 160 |
| 65                 | 174 | 170 | 169 | 171 | 172 | 172 | 168 | 168 | 170 | 168 | 169 | 174 | 175 | 172 | 169 | 169 | 168 | 164 | 162 |
| 70                 | 167 | 163 | 162 | 165 | 167 | 167 | 164 | 169 | 172 | 172 | 172 | 176 | 177 | 174 | 170 | 170 | 169 | 166 | 165 |
| 75                 | 164 | 160 | 159 | 162 | 166 | 167 | 167 | 171 | 174 | 175 | 175 | 177 | 177 | 174 | 172 | 171 | 170 | 167 | 168 |
| 80                 | 162 | 159 | 159 | 161 | 167 | 171 | 172 | 174 | 175 | 175 | 174 | 173 | 172 | 170 | 170 | 168 | 166 | 164 | 167 |
| 85                 | 165 | 163 | 163 | 164 | 168 | 174 | 175 | 176 | 175 | 174 | 173 | 169 | 165 | 163 | 161 | 160 | 157 | 160 | 166 |
| 90                 | 171 | 172 | 171 | 170 | 171 | 174 | 174 | 175 | 174 | 172 | 168 | 164 | 158 | 155 | 153 | 152 | 151 | 155 | 163 |
| 95                 | 176 | 175 | 174 | 174 | 175 | 172 | 169 | 170 | 168 | 164 | 159 | 157 | 154 | 151 | 151 | 150 | 150 | 151 | 156 |
| 100                | 176 | 172 | 171 | 172 | 174 | 170 | 165 | 163 | 161 | 157 | 154 | 155 | 154 | 151 | 150 | 151 | 151 | 151 | 153 |
| 105                | 173 | 170 | 167 | 170 | 172 | 169 | 163 | 161 | 158 | 154 | 152 | 154 | 155 | 151 | 150 | 152 | 152 | 153 | 156 |
| 110                | 173 | 171 | 168 | 170 | 171 | 167 | 161 | 157 | 155 | 154 | 154 | 155 | 156 | 153 | 153 | 156 | 157 | 157 | 158 |
| 115                | 172 | 172 | 171 | 171 | 169 | 163 | 157 | 153 | 151 | 152 | 154 | 158 | 161 | 161 | 160 | 160 | 159 | 158 | 156 |
| 120                | 169 | 171 | 173 | 171 | 166 | 159 | 153 | 150 | 150 | 151 | 155 | 160 | 167 | 171 | 169 | 165 | 159 | 155 | 152 |
| 125                | 162 | 168 | 170 | 167 | 160 | 153 | 150 | 149 | 149 | 152 | 156 | 159 | 167 | 173 | 170 | 163 | 158 | 154 | 152 |
| 130                | 154 | 160 | 162 | 159 | 154 | 148 | 146 | 147 | 147 | 148 | 151 | 156 | 162 | 166 | 163 | 156 | 153 | 151 | 149 |
| 135                | 148 | 152 | 154 | 152 | 148 | 144 | 141 | 142 | 143 | 144 | 144 | 151 | 156 | 159 | 157 | 151 | 148 | 146 | 143 |
| 140                | 144 | 148 | 149 | 148 | 146 | 144 | 142 | 140 | 140 | 142 | 144 | 148 | 153 | 155 | 154 | 150 | 147 | 144 | 142 |
| 145                | 143 | 146 | 146 | 145 | 145 | 146 | 145 | 143 | 144 | 144 | 147 | 147 | 149 | 150 | 150 | 149 | 147 | 144 | 141 |
| 150                | 142 | 142 | 142 | 143 | 144 | 146 | 147 | 149 | 150 | 152 | 151 | 149 | 146 | 147 | 147 | 147 | 148 | 148 | 146 |
| 155                | 144 | 142 | 141 | 142 | 143 | 146 | 150 | 153 | 155 | 155 | 153 | 152 | 148 | 148 | 148 | 149 | 149 | 149 | 148 |
| 160                | 142 | 142 | 143 | 144 | 143 | 143 | 146 | 148 | 150 | 150 | 149 | 147 | 146 | 147 | 152 | 152 | 146 | 143 | 143 |
| 165                | 125 | 124 | 123 | 123 | 119 | 117 | 121 | 127 | 133 | 136 | 138 | 138 | 139 | 139 | 140 | 140 | 134 | 130 | 130 |
| 170                | 133 | 134 | 133 | 134 | 132 | 126 | 122 | 119 | 117 | 115 | 121 | 130 | 139 | 142 | 143 | 146 | 143 | 136 | 132 |
| 175                | 130 | 135 | 140 | 142 | 141 | 140 | 139 | 141 | 142 | 138 | 130 | 125 | 122 | 124 | 128 | 129 | 127 | 124 | 124 |
| 180                | 144 | 141 | 138 | 139 | 145 | 150 | 154 | 155 | 155 | 155 | 155 | 155 | 154 | 149 | 138 | 134 | 136 | 140 | 142 |

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2017-03-19

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

|   |                       |                   |
|---|-----------------------|-------------------|
| Test:U:120.0V I:0.3352A P:40.13W PF:0.9967 Lamp Flux:2038.87x1 lm |                       |                   |
| NAME:   | TYPE:DOT-27C-PC or EG | WEIGHT:           |
| SPEC.:  | DIM.:                 | SERIAL No.:       |
| MFR.: Blackjack Lighting  | SUR.:0.45*0.45*.314   | PROTECTION ANGLE: |

Table--4


UNIT: cd

| C (DEG)<br>γ (DEG) | 285 | 290 | 295 | 300 | 305 | 310 | 315 | 320 | 325 | 330 | 335 | 340 | 345 | 350 | 355 |  |  |  |  |
|--------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|
| 0                  | 162 | 161 | 162 | 162 | 162 | 161 | 161 | 162 | 162 | 161 | 161 | 161 | 162 | 162 | 162 |  |  |  |  |
| 5                  | 162 | 162 | 162 | 162 | 162 | 162 | 163 | 163 | 163 | 163 | 162 | 162 | 163 | 162 | 162 |  |  |  |  |
| 10                 | 166 | 165 | 166 | 166 | 166 | 166 | 166 | 166 | 166 | 166 | 166 | 165 | 165 | 166 | 165 |  |  |  |  |
| 15                 | 168 | 167 | 167 | 166 | 166 | 166 | 165 | 165 | 165 | 165 | 166 | 167 | 169 | 170 | 170 |  |  |  |  |
| 20                 | 166 | 166 | 166 | 166 | 165 | 163 | 162 | 161 | 162 | 162 | 164 | 165 | 167 | 168 | 169 |  |  |  |  |
| 25                 | 163 | 162 | 163 | 163 | 163 | 162 | 162 | 162 | 161 | 161 | 160 | 160 | 161 | 162 | 163 |  |  |  |  |
| 30                 | 159 | 158 | 158 | 159 | 160 | 163 | 165 | 165 | 164 | 162 | 160 | 159 | 158 | 157 | 157 |  |  |  |  |
| 35                 | 157 | 156 | 155 | 156 | 159 | 164 | 167 | 168 | 167 | 164 | 160 | 157 | 155 | 153 | 152 |  |  |  |  |
| 40                 | 160 | 159 | 159 | 159 | 163 | 168 | 171 | 171 | 169 | 165 | 160 | 157 | 154 | 152 | 153 |  |  |  |  |
| 45                 | 161 | 161 | 162 | 163 | 168 | 172 | 176 | 178 | 177 | 171 | 164 | 159 | 158 | 157 | 157 |  |  |  |  |
| 50                 | 160 | 160 | 162 | 164 | 171 | 176 | 182 | 185 | 184 | 177 | 166 | 160 | 159 | 158 | 158 |  |  |  |  |
| 55                 | 156 | 157 | 159 | 165 | 173 | 178 | 182 | 185 | 183 | 176 | 167 | 160 | 156 | 155 | 156 |  |  |  |  |
| 60                 | 156 | 154 | 158 | 165 | 172 | 175 | 175 | 175 | 174 | 170 | 164 | 158 | 154 | 152 | 153 |  |  |  |  |
| 65                 | 160 | 159 | 160 | 164 | 168 | 167 | 164 | 161 | 162 | 164 | 161 | 158 | 156 | 154 | 156 |  |  |  |  |
| 70                 | 165 | 164 | 160 | 161 | 162 | 161 | 158 | 154 | 155 | 158 | 157 | 156 | 159 | 161 | 161 |  |  |  |  |
| 75                 | 168 | 167 | 162 | 161 | 162 | 159 | 154 | 152 | 153 | 155 | 154 | 154 | 160 | 165 | 165 |  |  |  |  |
| 80                 | 169 | 169 | 168 | 167 | 164 | 159 | 154 | 153 | 153 | 154 | 155 | 160 | 165 | 169 | 170 |  |  |  |  |
| 85                 | 169 | 170 | 171 | 172 | 167 | 161 | 158 | 158 | 158 | 158 | 161 | 167 | 171 | 173 | 173 |  |  |  |  |
| 90                 | 167 | 169 | 171 | 173 | 170 | 166 | 166 | 167 | 167 | 165 | 165 | 169 | 172 | 173 | 172 |  |  |  |  |
| 95                 | 162 | 165 | 168 | 172 | 173 | 171 | 170 | 171 | 172 | 172 | 168 | 167 | 170 | 170 | 168 |  |  |  |  |
| 100                | 159 | 164 | 166 | 170 | 173 | 171 | 168 | 169 | 172 | 173 | 167 | 164 | 165 | 164 | 161 |  |  |  |  |
| 105                | 159 | 163 | 164 | 169 | 173 | 172 | 168 | 169 | 173 | 172 | 167 | 164 | 163 | 162 | 159 |  |  |  |  |
| 110                | 157 | 158 | 160 | 167 | 172 | 173 | 170 | 172 | 174 | 171 | 166 | 162 | 159 | 159 | 160 |  |  |  |  |
| 115                | 154 | 152 | 156 | 164 | 171 | 173 | 174 | 174 | 173 | 169 | 163 | 159 | 156 | 156 | 159 |  |  |  |  |
| 120                | 151 | 151 | 152 | 159 | 167 | 172 | 176 | 174 | 170 | 164 | 158 | 155 | 154 | 154 | 156 |  |  |  |  |
| 125                | 150 | 149 | 151 | 154 | 161 | 169 | 173 | 171 | 165 | 158 | 154 | 153 | 153 | 154 | 157 |  |  |  |  |
| 130                | 148 | 146 | 147 | 149 | 156 | 162 | 164 | 163 | 158 | 152 | 151 | 151 | 153 | 155 | 158 |  |  |  |  |
| 135                | 141 | 140 | 141 | 144 | 150 | 155 | 157 | 156 | 152 | 147 | 145 | 147 | 149 | 153 | 156 |  |  |  |  |
| 140                | 140 | 139 | 142 | 144 | 148 | 152 | 153 | 152 | 148 | 145 | 142 | 142 | 144 | 148 | 152 |  |  |  |  |
| 145                | 141 | 141 | 143 | 144 | 146 | 149 | 150 | 149 | 147 | 146 | 145 | 144 | 145 | 150 | 154 |  |  |  |  |
| 150                | 145 | 143 | 143 | 144 | 144 | 145 | 145 | 146 | 147 | 148 | 148 | 149 | 151 | 152 | 155 |  |  |  |  |
| 155                | 145 | 142 | 142 | 142 | 140 | 140 | 142 | 145 | 148 | 151 | 153 | 154 | 156 | 157 | 156 |  |  |  |  |
| 160                | 141 | 138 | 138 | 136 | 134 | 134 | 138 | 143 | 146 | 146 | 150 | 152 | 156 | 156 | 155 |  |  |  |  |
| 165                | 131 | 132 | 129 | 125 | 121 | 119 | 118 | 118 | 119 | 120 | 124 | 131 | 137 | 141 | 143 |  |  |  |  |
| 170                | 127 | 123 | 122 | 126 | 131 | 133 | 132 | 132 | 133 | 127 | 122 | 119 | 117 | 117 | 120 |  |  |  |  |
| 175                | 130 | 133 | 131 | 129 | 127 | 128 | 134 | 139 | 142 | 142 | 140 | 137 | 139 | 140 | 134 |  |  |  |  |
| 180                | 142 | 141 | 140 | 140 | 142 | 141 | 136 | 133 | 136 | 144 | 151 | 154 | 155 | 156 | 156 |  |  |  |  |

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2017-03-19


γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

I (cd)

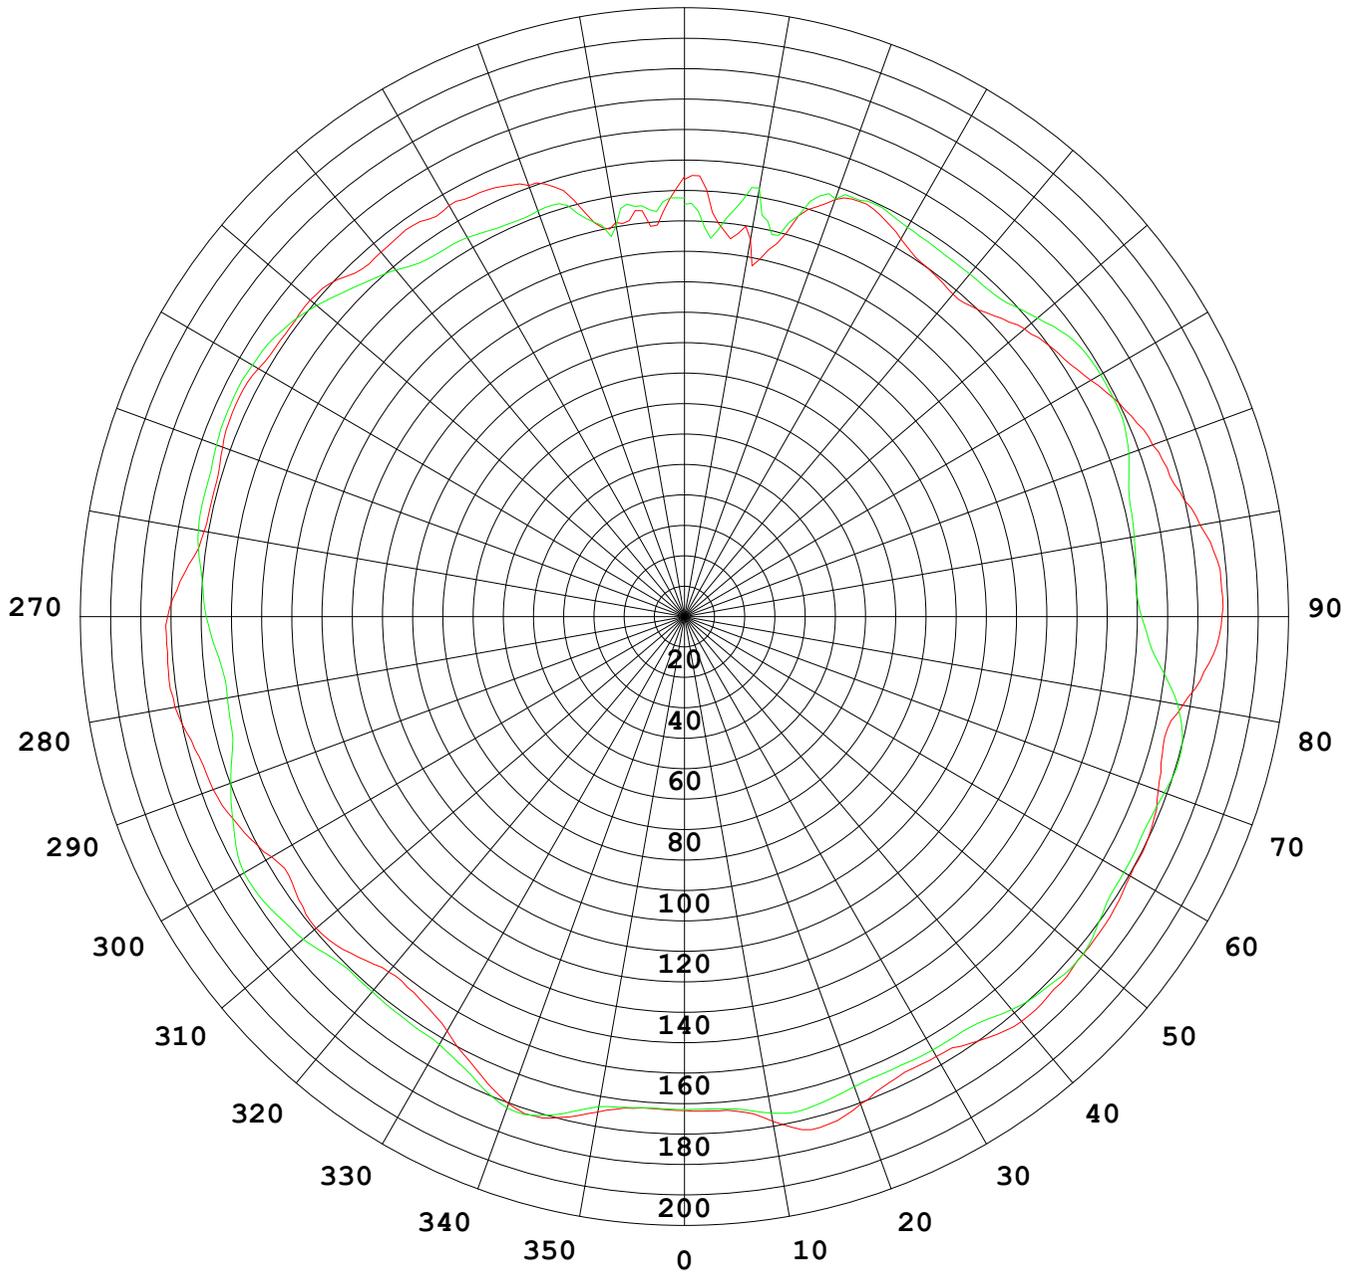

1000 lm

$\kappa = 1$

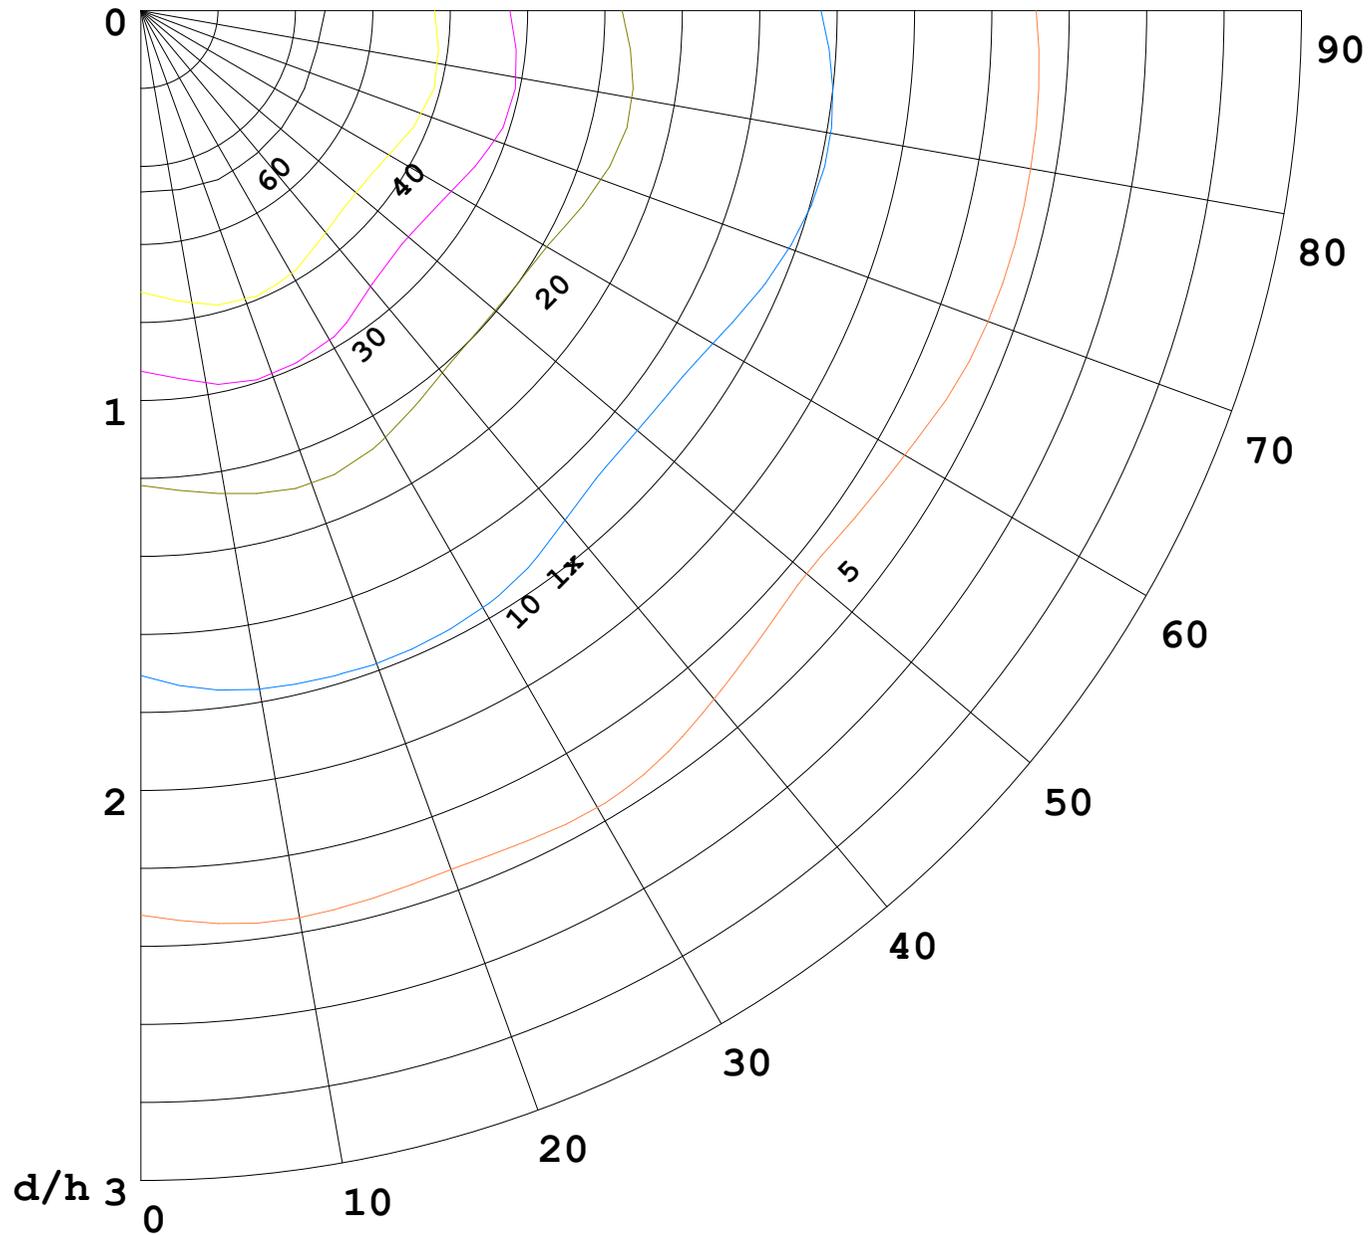

**F** = 5000 lm  
**K** = 0.7  
**Hcc** = 0.0 m  
**Hfc** = 0.0 m  
**Eave** = 100 lx

|       | <b>Pcc</b> | <b>Pw</b> | <b>Pfc</b> |
|-------|------------|-----------|------------|
| ————— | 70         | 50        | 30         |
| ————— | 50         | 30        | 20         |

