



## IESNA LM-79 TEST REPORT

|                                                             |                                                                                                                        |
|-------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Applicant's name .....                                      | Blackjack lighting                                                                                                     |
| Address .....                                               | 1553 Barclay Blvd. Buffalo Grove, IL 60089                                                                             |
| Brand Name .....                                            | Blackjack lighting                                                                                                     |
| Report No. ....                                             | BTR66.181.15.0040.53                                                                                                   |
| Product Name .....                                          | Pendant fixture                                                                                                        |
| Model Number .....                                          | SWL-32P-SN                                                                                                             |
| Tested by<br>(printed name and signature) ..... David Zhang |                                                                                                                        |
| Title .....                                                 | Test Engineer                                                                                                          |
| Approved by<br>(printed name and signature) ..... Steven Su |                                                                                                                        |
| Title .....                                                 | Approved Signatory                                                                                                     |
| Date of issue .....                                         | May 09, 2016                                                                                                           |
| Testing Laboratory Name .....                               | BEST Test Service Shenzhen Co., Ltd.                                                                                   |
| Address .....                                               | 1 <sup>st</sup> Floor, 1 <sup>st</sup> Building, Weitai Industrial Park, Yingrenshi, Shiyao, Baoan,<br>Shenzhen, China |
| Accreditation .....                                         | DLC/Lighting Facts/UL/ETL/ELI/NVLAP/EPA/DOE                                                                            |
| Test specification                                          |                                                                                                                        |
| Standard .....                                              | IESNA LM-79                                                                                                            |
| Test procedure .....                                        | IESNA LM-79 Test Procedure                                                                                             |
| Non-standard test method .....                              | No                                                                                                                     |
| Test Report Form No.                                        | BEST_ LM-79                                                                                                            |
| TRF originator .....                                        | BEST Test Service Shenzhen Co., Ltd. Mr Tseng                                                                          |
| Master TRF .....                                            | BEST_ LM-79.doc                                                                                                        |

Note:

This report is not valid as a BEST Test Report unless signed by an approved BEST Test Service Shenzhen Co., Ltd. This report shall not be reproduced except in full without the written approval of the testing laboratory. The test report only allows to be revised within the retention period unless further standard or the requirement was noticed. This report is for the exclusive use of BEST's Client and is provided pursuant to the agreement between BEST and its Client. BEST's responsibility and Liability are limited to the terms and conditions of the agreement. BEST assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the BEST name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by BEST. The observations and test results in this report are relevant only to the sample tested. This report by itself does not cover that the material, product, of service is or has ever been under a BEST certification program. National Voluntary Laboratory Accreditation Program (NVLAP) has accredited this laboratory under ISO17025: 2005 for specific laboratory activities as listed in the NVLAP directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

|                                                                              |                                                              |
|------------------------------------------------------------------------------|--------------------------------------------------------------|
| <b>Product description:</b>                                                  |                                                              |
| Test date .....                                                              | May 09, 2016                                                 |
| Sample Quantity .....                                                        | 1 unit                                                       |
| SKU.....                                                                     | N/A                                                          |
| Rating(s) (V; Hz) .....                                                      | 120V 60Hz                                                    |
| Nominal Power .....                                                          | 85W                                                          |
| Nominal Power Factor .....                                                   | N/A                                                          |
| Nominal Lumen Output.....                                                    | 7000lm                                                       |
| Nominal CCT .....                                                            | 3000K                                                        |
| Nominal CRI(Ra) .....                                                        | 90                                                           |
| Number of hours operated prior to measurement                                | 0H                                                           |
| Total operating time of the product for measurements including stabilization | 3.5H                                                         |
| Ambient temperature                                                          | 25°C                                                         |
| Orientation (burning position) of SSL product during test                    | Lighting Surface Down                                        |
| Stabilization time                                                           | 1.5 H                                                        |
| Photometric method                                                           | Sphere-spectroradiometer+Goniophotometer                     |
| reference standard used                                                      | DC 24V 100W Omni-Directional Halogen Calibrated by NIM China |
| Correction factors applied                                                   | Self absorbing applied                                       |
| Photometric measurement conditions                                           | See test method description below                            |
| Bandwidth of spectroradiometer                                               | 2nm                                                          |
| Statement of uncertainties                                                   | 1.12%                                                        |
| Deviation from standard operating procedures,                                | None                                                         |

## Photometric and Electrical Measurement

Total light output (luminous flux) for the  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$  ambient temperature conditions is measured using a EVERFINE 2.0 m 4 $\pi$  geometry integrating sphere. Temperature is measured at a position inside the sphere. Spectral radiant flux measurements are made using Integral Sphere to the detector port of the integrating sphere. Each lamp is operated at rated voltage in its designated orientation by a CHROMA 61602 AC SOURCE. Each lamp should be stable before measurements are made as below:

Step 1 Take 3 measurements of the lamp light output at 15 minute interval (total time=30mintues.)This time period is in addition to the recommended pre-burning time.

Step 2 Calculate the percent difference between the maximum measured value and the minimum measured value for the three consecutive measurements.

Step 3 if the value calculated in Step 2 does not exceed 0.5 percent, the lamp is considered stable.

Luminous flux, chromaticity coordinates, correlated color temperature and color rendering index for each lamp are calculated from the spectral radiant flux measurements taken at 2 nm intervals over the range 380 to 780 nm by EVERFINE HASS-2000. The calibration of the sphere photometer-spectrometer system is traceable to the NIM China by a calibrated halogen incandescent lamp. Lamp efficacy (lumens per watts) for each lamp model is computed based on the revised luminous flux result. Electrical measurements including voltage, current, power and power factor are measured using the YOKOGAWA WT310 digital power Meter.

The total uncertainty of the light output measurements is estimated, at the 95% confidence level, not to exceed  $\pm 1.12\%$  over the wavelength range 380-780 nm.


## Luminous Intensity


A Everfine GOR-5000 Goniophotometer was used to measure the intensity at each angle of distribution, Luminous intensity (cd) is measured within each vertical plane at a  $5^{\circ}$  vertical angle increment (maximum) from  $0^{\circ}$  to  $180^{\circ}$  Luminous intensity (cd), measurements repeated in vertical planes about the lamp (polar) axis in maximum increments of  $22.5^{\circ}$  from  $0^{\circ}$  to  $180^{\circ}$ , and export the intensity (cd) with excel format. The test distance is 25meters from the Goniophotometer to the detector

## Photometric and Electrical Test Data

| Input Voltage (V) | Frequency (Hz) | Input Current (A) | ITHD         | Input Power (W) | Power Factor  | Lumen Output (Lumens) | Efficiency Lumen/w |
|-------------------|----------------|-------------------|--------------|-----------------|---------------|-----------------------|--------------------|
| 120.0             | 60.0           | 0.7011            | /            | 83.91           | 0.997         | 7042.91               | 83.94              |
| CCT (K)           | CRI (Ra)       | R9                | x<br>CIE1931 | y<br>CIE1931    | u'<br>CIE1976 | v'<br>CIE1976         | Duv<br>CIE1976     |
| 3163              | 95.4           | 77                | 0.4237       | 0.3952          | 0.2458        | 0.5159                | 0.0016             |

## Spectral Plots

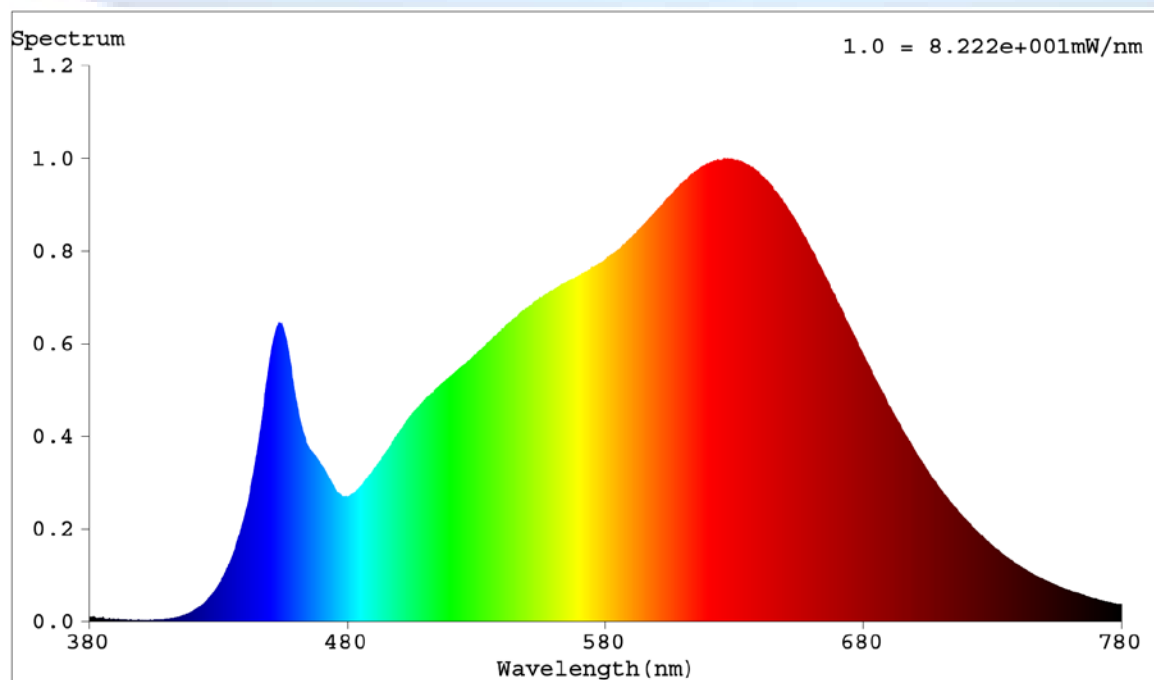

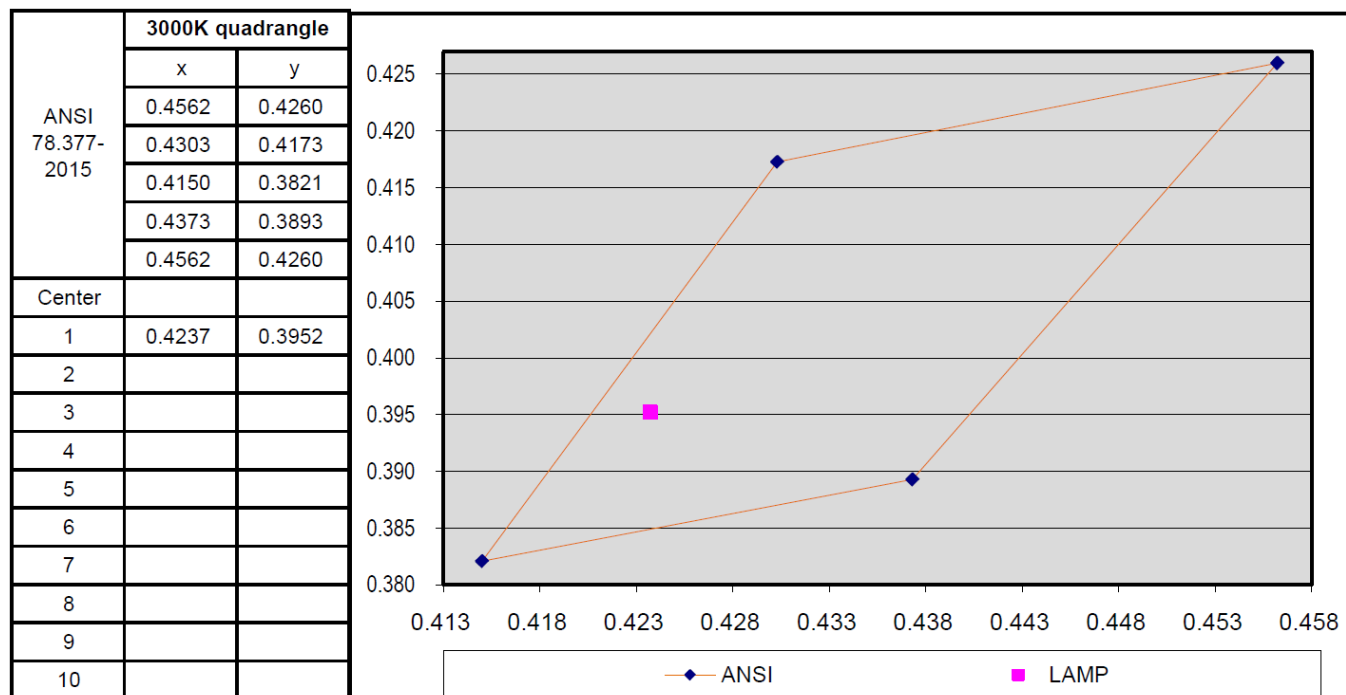
**7 Step Quadrangle****EUT Photo**

## LUMINAIRE PHOTOMETRIC TEST REPORT


|                                                                   |                     |                   |
|-------------------------------------------------------------------|---------------------|-------------------|
| Test:U:120.0V I:0.7011A P:83.91W PF:0.9967 Lamp Flux:7042.91x1 lm |                     |                   |
| NAME:                                                             | TYPE:SWL-32P-SN     | WEIGHT:           |
| SPEC.:                                                            | DIM.:               | SERIAL No.:       |
| MFR.: 大显                                                          | SUR.:0.41*0.41*3.14 | PROTECTION ANGLE: |

| DATA OF LAMP     |            | PHOTOMETRIC DATA Eff: 83.94 lm/W |         |                    |            |
|------------------|------------|----------------------------------|---------|--------------------|------------|
| MODEL            | SWL-32P-SN | I <sub>max</sub> (cd)            | 626.0   | S/MH(C0/180)       | 1.63       |
| NOMINAL POWER(W) | 85         | LOR(%)                           | 100.0   | S/MH(C90/270)      | 1.65       |
| RATED VOLTAGE(V) | 120        | TOTAL FLUX(lm)                   | 7042.9  | η UP, DN(C0-180)   | 25.2, 25.1 |
| NOMINAL FLUX(lm) | 7042.91    | CIE CLASS                        | DIFFUSE | η UP, DN(C180-360) | 24.2, 25.4 |
| LAMPS INSIDE     | 1          | η up(%)                          | 49.4    | CIBSE SHR NOM      | 2.00       |
| TEST VOLTAGE(V)  | 120        | η down(%)                        | 50.6    | CIBSE SHR MAX      | 0.00       |

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

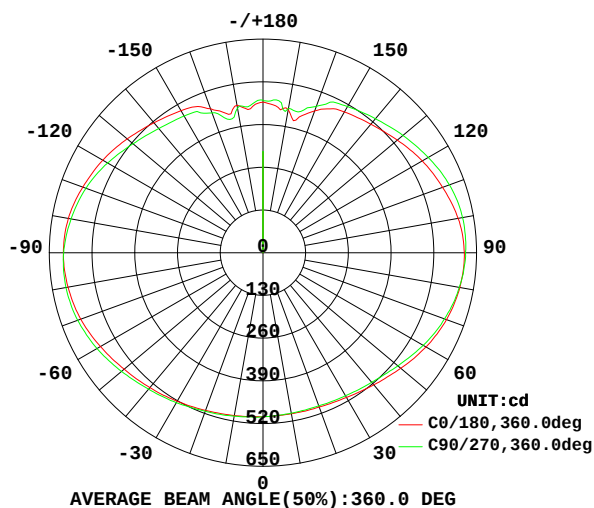

PLANAR ISOLUX DIAGRAM(UNIT:lx)

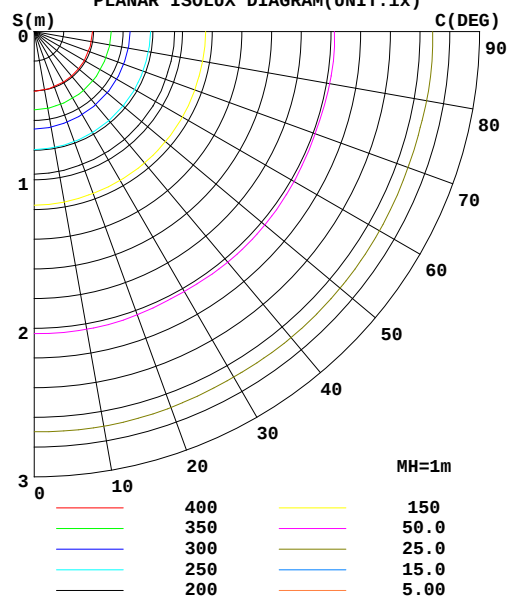


C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2016-05-09

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

### ZONAL FLUX DIAGRAM:

| $\gamma$ | C0                    | C45   | C90   | C135  | C180  | C225  | C270  | C315  | $\gamma$ | $\Phi$ zone | $\Phi$ total | %lum,lamp |
|----------|-----------------------|-------|-------|-------|-------|-------|-------|-------|----------|-------------|--------------|-----------|
| 10       | 497.6                 | 494.6 | 495.6 | 500.0 | 502.9 | 505.2 | 505.2 | 502.7 | 0- 10    | 47.71       | 47.71        | 0.68,0.68 |
| 20       | 499.9                 | 495.8 | 495.8 | 503.3 | 510.8 | 514.4 | 513.4 | 509.5 | 10- 20   | 142.6       | 190.3        | 2.7,2.7   |
| 30       | 508.6                 | 501.7 | 502.3 | 512.6 | 521.8 | 527.2 | 526.9 | 520.5 | 20- 30   | 236.3       | 426.6        | 6.06,6.06 |
| 40       | 524.9                 | 514.5 | 514.8 | 527.7 | 535.8 | 542.5 | 542.1 | 534.2 | 30- 40   | 328.2       | 754.9        | 10.7,10.7 |
| 50       | 547.1                 | 537.4 | 535.8 | 547.9 | 551.4 | 560.4 | 561.9 | 552.1 | 40- 50   | 417.8       | 1173         | 16.7,16.7 |
| 60       | 573.2                 | 567.4 | 563.2 | 571.1 | 571.1 | 580.8 | 583.2 | 573.4 | 50- 60   | 503.7       | 1676         | 23.8,23.8 |
| 70       | 594.8                 | 591.9 | 587.8 | 594.3 | 590.2 | 600.8 | 600.3 | 593.1 | 60- 70   | 580.1       | 2256         | 32,32     |
| 80       | 608.1                 | 607.7 | 606.6 | 613.4 | 602.4 | 611.8 | 609.1 | 606.7 | 70- 80   | 637.5       | 2894         | 41.1,41.1 |
| 90       | 612.6                 | 613.9 | 616.4 | 622.2 | 607.4 | 613.2 | 606.5 | 606.9 | 80- 90   | 667.5       | 3561         | 50.6,50.6 |
| 100      | 602.8                 | 609.0 | 616.6 | 619.1 | 601.3 | 604.4 | 592.9 | 593.9 | 90-100   | 665.6       | 4227         | 60,60     |
| 110      | 581.8                 | 592.6 | 603.9 | 604.4 | 583.6 | 584.3 | 573.4 | 571.2 | 100-110  | 632.1       | 4859         | 69,69     |
| 120      | 559.7                 | 568.7 | 580.7 | 582.5 | 563.3 | 557.0 | 546.1 | 542.3 | 110-120  | 571.8       | 5431         | 77.1,77.1 |
| 130      | 533.7                 | 544.3 | 555.8 | 558.2 | 539.4 | 529.4 | 516.2 | 513.7 | 120-130  | 493.3       | 5924         | 84.1,84.1 |
| 140      | 511.0                 | 521.9 | 532.6 | 536.8 | 516.4 | 505.3 | 493.8 | 493.3 | 130-140  | 406.7       | 6331         | 89.9,89.9 |
| 150      | 495.0                 | 504.9 | 514.1 | 517.9 | 499.5 | 488.7 | 480.5 | 481.5 | 140-150  | 317.9       | 6649         | 94.4,94.4 |
| 160      | 459.4                 | 470.5 | 474.5 | 486.7 | 466.4 | 459.2 | 453.3 | 439.6 | 150-160  | 225.3       | 6874         | 97.6,97.6 |
| 170      | 442.7                 | 427.9 | 446.4 | 451.8 | 456.0 | 446.4 | 447.6 | 430.6 | 160-170  | 125.5       | 7000         | 99.4,99.4 |
| 180      | 458.9                 | 465.2 | 462.7 | 461.2 | 458.4 | 463.6 | 464.6 | 460.8 | 170-180  | 43.23       | 7043         | 100,100   |
| DEG      | LUMINOUS INTENSITY:cd |       |       |       |       |       |       |       |          | UNIT:lm     |              |           |

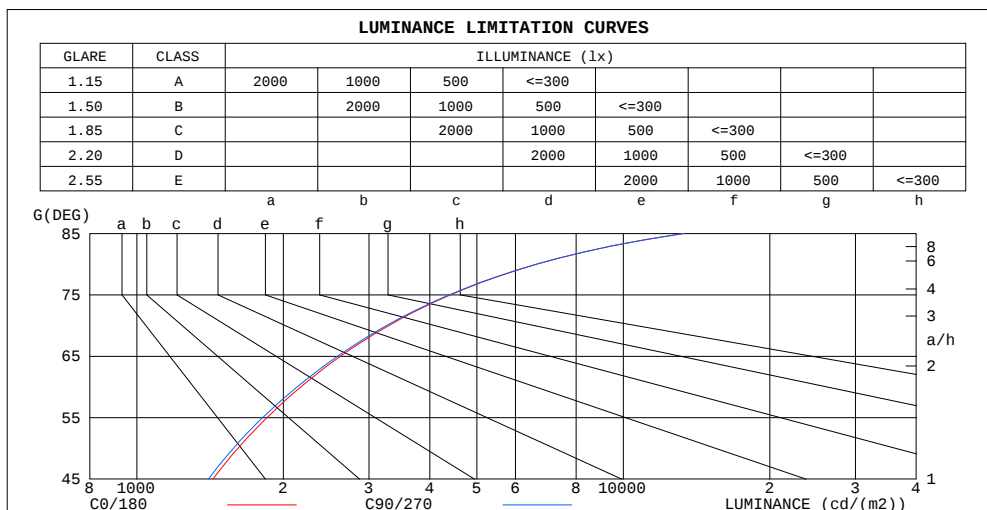


C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.6DEG  
Operators:David  
Test Date:2016-05-09

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.287  
Humidity:67.1%  
Test Distance:26.000m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

|                                                                   |                     |                   |
|-------------------------------------------------------------------|---------------------|-------------------|
| Test:U:120.0V I:0.7011A P:83.91W PF:0.9967 Lamp Flux:7042.91x1 lm |                     |                   |
| NAME:                                                             | TYPE:SWL-32P-SN     | WEIGHT:           |
| SPEC.:                                                            | DIM.:               | SERIAL No.:       |
| MFR.: 大显                                                          | SUR.:0.41*0.41*3.14 | PROTECTION ANGLE: |

| $\rho_{cc}$ | 80%                   |      |      | 70% |     |     | 50%                             |     |     | 30% |     |     | 10% |     |     | 0   |
|-------------|-----------------------|------|------|-----|-----|-----|---------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| $\rho_w$    | 50%                   | 30%  | 10%  | 50% | 30% | 10% | 50%                             | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0   |
| $\rho_{fc}$ | 20%                   |      |      | 20% |     |     | 20%                             |     |     | 20% |     |     | 20% |     |     | 0   |
| RCR         | RCR:Room Cavity Ratio |      |      |     |     |     | Coefficients of Utilization(CU) |     |     |     |     |     |     |     |     |     |
| 0.0         | 1.07                  | 1.07 | 1.07 | .99 | .99 | .99 | .84                             | .84 | .84 | .70 | .70 | .70 | .57 | .57 | .57 | .51 |
| 1.0         | .87                   | .81  | .76  | .80 | .75 | .70 | .66                             | .63 | .59 | .54 | .51 | .48 | .43 | .41 | .39 | .33 |
| 2.0         | .73                   | .65  | .59  | .67 | .60 | .54 | .56                             | .50 | .45 | .45 | .41 | .37 | .35 | .32 | .29 | .24 |
| 3.0         | .63                   | .54  | .47  | .58 | .50 | .43 | .48                             | .42 | .36 | .38 | .34 | .30 | .30 | .26 | .23 | .19 |
| 4.0         | .55                   | .46  | .39  | .50 | .42 | .36 | .42                             | .35 | .30 | .33 | .28 | .24 | .26 | .22 | .19 | .15 |
| 5.0         | .49                   | .39  | .32  | .44 | .36 | .30 | .37                             | .30 | .25 | .30 | .24 | .20 | .23 | .19 | .16 | .12 |
| 6.0         | .43                   | .34  | .27  | .40 | .31 | .25 | .33                             | .26 | .21 | .26 | .21 | .17 | .21 | .17 | .13 | .10 |
| 7.0         | .39                   | .30  | .24  | .36 | .28 | .22 | .30                             | .23 | .18 | .24 | .19 | .15 | .19 | .15 | .12 | .09 |
| 8.0         | .35                   | .26  | .21  | .32 | .24 | .19 | .27                             | .21 | .16 | .22 | .17 | .13 | .17 | .13 | .10 | .08 |
| 9.0         | .32                   | .24  | .18  | .29 | .22 | .17 | .24                             | .18 | .14 | .20 | .15 | .12 | .16 | .12 | .09 | .07 |
| 10.0        | .29                   | .21  | .16  | .27 | .20 | .15 | .22                             | .17 | .13 | .18 | .14 | .10 | .14 | .11 | .08 | .06 |

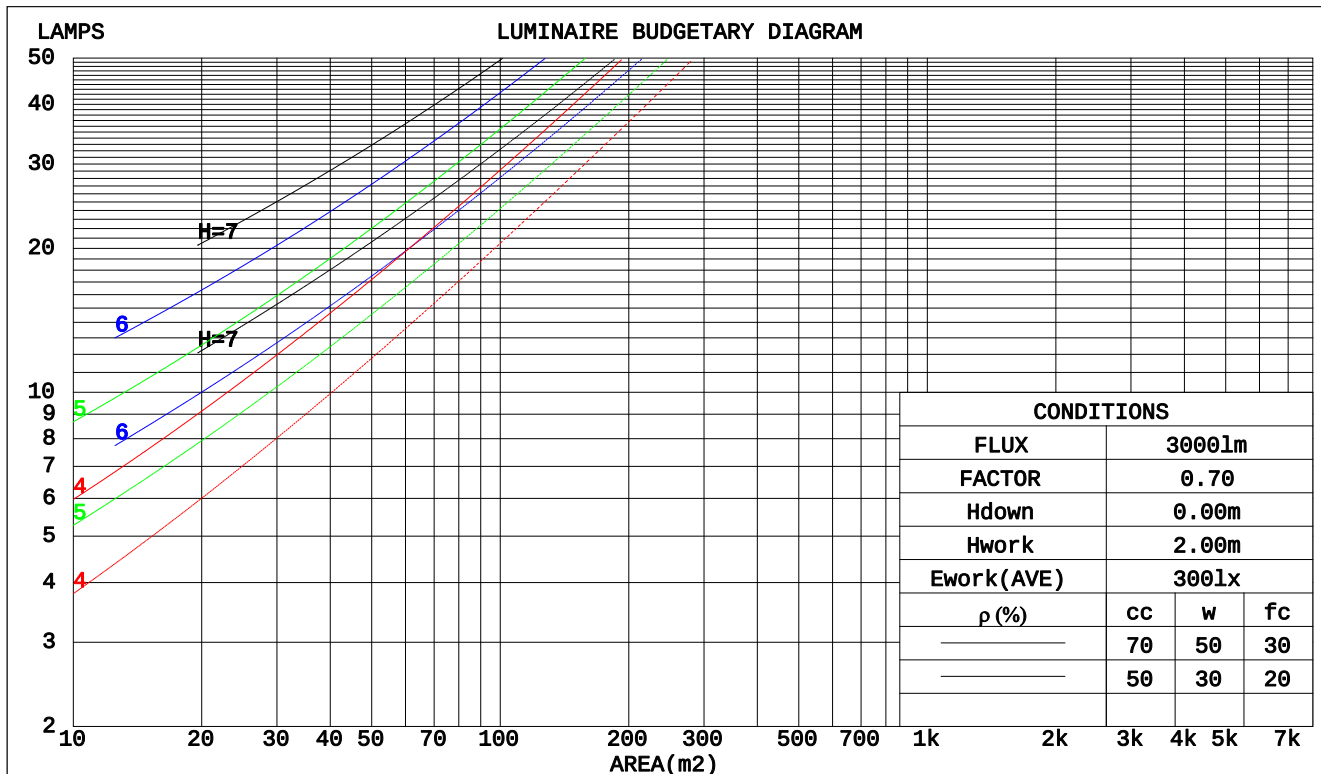

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2016-05-09

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

## WEC AND CCEC

|                                                                   |  |  |  |                     |  |  |  |                   |  |
|-------------------------------------------------------------------|--|--|--|---------------------|--|--|--|-------------------|--|
| Test:U:120.0V I:0.7011A P:83.91W PF:0.9967 Lamp Flux:7042.91x1 lm |  |  |  |                     |  |  |  |                   |  |
| NAME:                                                             |  |  |  | TYPE:SWL-32P-SN     |  |  |  | WEIGHT:           |  |
| SPEC.:                                                            |  |  |  | DIM.:               |  |  |  | SERIAL No.:       |  |
| MFR.: 大显                                                          |  |  |  | SUR.:0.41*0.41*3.14 |  |  |  | PROTECTION ANGLE: |  |

| ρcc  | 80%                   |      |      | 70%  |      |      | 50%                             |      |      | 30%  |      |      | 10%  |      |      | 0 |
|------|-----------------------|------|------|------|------|------|---------------------------------|------|------|------|------|------|------|------|------|---|
| ρw   | 50%                   | 30%  | 10%  | 50%  | 30%  | 10%  | 50%                             | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0 |
| ρfc  | 20%                   |      |      | 20%  |      |      | 20%                             |      |      | 20%  |      |      | 20%  |      |      | 0 |
| RCR  | RCR:Room Cavity Ratio |      |      |      |      |      | Wall Exitance Coefficients(WEC) |      |      |      |      |      |      |      |      |   |
| 0.0  |                       |      |      |      |      |      |                                 |      |      |      |      |      |      |      |      |   |
| 1.0  | .407                  | .232 | .073 | .385 | .220 | .070 | .343                            | .197 | .063 | .305 | .176 | .056 | .270 | .156 | .050 |   |
| 2.0  | .340                  | .186 | .057 | .320 | .176 | .054 | .282                            | .157 | .049 | .246 | .138 | .043 | .214 | .121 | .038 |   |
| 3.0  | .297                  | .158 | .047 | .278 | .149 | .045 | .243                            | .132 | .040 | .211 | .116 | .035 | .181 | .100 | .031 |   |
| 4.0  | .264                  | .137 | .040 | .247 | .129 | .038 | .215                            | .114 | .034 | .185 | .100 | .030 | .158 | .086 | .026 |   |
| 5.0  | .238                  | .121 | .035 | .223 | .114 | .033 | .193                            | .101 | .030 | .166 | .088 | .026 | .140 | .075 | .023 |   |
| 6.0  | .217                  | .109 | .031 | .203 | .103 | .030 | .176                            | .090 | .026 | .150 | .078 | .023 | .127 | .067 | .020 |   |
| 7.0  | .200                  | .099 | .028 | .186 | .093 | .026 | .161                            | .082 | .023 | .138 | .071 | .021 | .116 | .060 | .018 |   |
| 8.0  | .185                  | .090 | .025 | .172 | .085 | .024 | .149                            | .074 | .021 | .127 | .064 | .019 | .107 | .055 | .016 |   |
| 9.0  | .172                  | .083 | .023 | .160 | .078 | .022 | .139                            | .068 | .019 | .118 | .059 | .017 | .099 | .050 | .014 |   |
| 10.0 | .160                  | .077 | .021 | .150 | .072 | .020 | .129                            | .063 | .018 | .110 | .055 | .016 | .092 | .046 | .013 |   |

| ρ <sub>CC</sub> | 80%                   |      |      | 70%  |      |      | 50%                                        |      |      | 30%  |      |      | 10%  |      |      | 0 |
|-----------------|-----------------------|------|------|------|------|------|--------------------------------------------|------|------|------|------|------|------|------|------|---|
| ρ <sub>W</sub>  | 50%                   | 30%  | 10%  | 50%  | 30%  | 10%  | 50%                                        | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0 |
| ρ <sub>fC</sub> | 20%                   |      |      | 20%  |      |      | 20%                                        |      |      | 20%  |      |      | 20%  |      |      | 0 |
| RCR             | RCR:Room Cavity Ratio |      |      |      |      |      | Ceiling Cavity Exitance Coefficients(CCEC) |      |      |      |      |      |      |      |      |   |
| 0.0             | .567                  | .567 | .567 | .485 | .485 | .485 | .331                                       | .331 | .331 | .190 | .190 | .190 | .061 | .061 | .061 |   |
| 1.0             | .567                  | .535 | .506 | .485 | .459 | .436 | .332                                       | .316 | .301 | .191 | .183 | .175 | .061 | .059 | .057 |   |
| 2.0             | .561                  | .514 | .474 | .480 | .442 | .410 | .329                                       | .306 | .286 | .190 | .178 | .168 | .061 | .058 | .055 |   |
| 3.0             | .554                  | .499 | .455 | .475 | .430 | .394 | .326                                       | .299 | .277 | .188 | .175 | .163 | .061 | .057 | .053 |   |
| 4.0             | .547                  | .487 | .442 | .469 | .421 | .384 | .323                                       | .293 | .270 | .187 | .172 | .160 | .060 | .056 | .053 |   |
| 5.0             | .539                  | .478 | .433 | .463 | .414 | .377 | .319                                       | .289 | .266 | .185 | .170 | .158 | .060 | .055 | .052 |   |
| 6.0             | .532                  | .471 | .427 | .457 | .408 | .372 | .315                                       | .286 | .263 | .183 | .168 | .156 | .059 | .055 | .052 |   |
| 7.0             | .525                  | .465 | .423 | .452 | .403 | .368 | .312                                       | .283 | .261 | .181 | .166 | .155 | .059 | .054 | .051 |   |
| 8.0             | .519                  | .460 | .419 | .447 | .399 | .365 | .309                                       | .280 | .259 | .180 | .165 | .154 | .058 | .054 | .051 |   |
| 9.0             | .513                  | .455 | .416 | .442 | .395 | .363 | .306                                       | .278 | .258 | .178 | .164 | .154 | .058 | .054 | .051 |   |
| 10.0            | .507                  | .451 | .414 | .437 | .392 | .362 | .303                                       | .276 | .257 | .177 | .163 | .153 | .057 | .054 | .051 |   |

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2016-05-09

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

## UGR(Unified Glare Rating) Table

|                                                                   |     |                  |      |      |                     |      |                |                   |      |      |      |
|-------------------------------------------------------------------|-----|------------------|------|------|---------------------|------|----------------|-------------------|------|------|------|
| Test:U:120.0V I:0.7011A P:83.91W PF:0.9967 Lamp Flux:7042.91x1 lm |     |                  |      |      |                     |      |                |                   |      |      |      |
| NAME:                                                             |     |                  |      |      | TYPE:SWL-32P-SN     |      |                | WEIGHT:           |      |      |      |
| SPEC.:                                                            |     |                  |      |      | DIM.:               |      |                | SERIAL No.:       |      |      |      |
| MFR.: 大显                                                          |     |                  |      |      | SUR.:0.41*0.41*3.14 |      |                | PROTECTION ANGLE: |      |      |      |
| ceiling/cavity                                                    | 0.7 | 0.7              | 0.5  | 0.5  | 0.3                 | 0.7  | 0.7            | 0.5               | 0.5  | 0.3  |      |
| walls                                                             | 0.5 | 0.3              | 0.5  | 0.3  | 0.3                 | 0.5  | 0.3            | 0.5               | 0.3  | 0.3  |      |
| working plane                                                     | 0.2 | 0.2              | 0.2  | 0.2  | 0.2                 | 0.2  | 0.2            | 0.2               | 0.2  | 0.2  |      |
| Room dimensions                                                   |     | Viewed crosswise |      |      |                     |      | Viewed endwise |                   |      |      |      |
| x = 2H y = 2H                                                     |     | 11.8             | 12.8 | 12.6 | 13.7                | 14.9 | 11.7           | 12.8              | 12.5 | 13.6 | 14.8 |
|                                                                   | 3H  | 15.1             | 16.1 | 16.0 | 17.0                | 18.2 | 15.0           | 16.0              | 15.9 | 16.9 | 18.1 |
|                                                                   | 4H  | 17.1             | 18.0 | 18.0 | 18.9                | 20.1 | 17.0           | 17.9              | 17.9 | 18.8 | 20.0 |
|                                                                   | 6H  | 19.2             | 20.0 | 20.1 | 21.0                | 22.2 | 19.1           | 20.0              | 20.0 | 20.9 | 22.1 |
|                                                                   | 8H  | 20.3             | 21.2 | 21.2 | 22.1                | 23.3 | 20.3           | 21.1              | 21.2 | 22.1 | 23.3 |
|                                                                   | 12H | 21.7             | 22.5 | 22.6 | 23.4                | 24.7 | 21.6           | 22.4              | 22.6 | 23.4 | 24.6 |
| 4H                                                                | 2H  | 12.8             | 13.7 | 13.7 | 14.6                | 15.8 | 12.7           | 13.7              | 13.6 | 14.6 | 15.8 |
|                                                                   | 3H  | 16.3             | 17.1 | 17.2 | 18.0                | 19.3 | 16.2           | 17.0              | 17.1 | 18.0 | 19.2 |
|                                                                   | 4H  | 18.3             | 19.0 | 19.3 | 20.0                | 21.3 | 18.2           | 19.0              | 19.2 | 19.9 | 21.2 |
|                                                                   | 6H  | 20.6             | 21.2 | 21.5 | 22.2                | 23.5 | 20.5           | 21.2              | 21.5 | 22.2 | 23.4 |
|                                                                   | 8H  | 21.8             | 22.4 | 22.8 | 23.4                | 24.7 | 21.8           | 22.4              | 22.7 | 23.4 | 24.7 |
|                                                                   | 12H | 23.2             | 23.8 | 24.2 | 24.8                | 26.1 | 23.2           | 23.8              | 24.2 | 24.8 | 26.1 |
| 8H                                                                | 4H  | 19.0             | 19.7 | 20.0 | 20.6                | 21.9 | 19.0           | 19.6              | 20.0 | 20.6 | 21.9 |
|                                                                   | 6H  | 21.6             | 22.1 | 22.5 | 23.1                | 24.4 | 21.5           | 22.0              | 22.5 | 23.0 | 24.4 |
|                                                                   | 8H  | 23.0             | 23.5 | 24.0 | 24.5                | 25.8 | 23.0           | 23.4              | 24.0 | 24.4 | 25.8 |
|                                                                   | 12H | 24.6             | 25.0 | 25.6 | 26.1                | 27.4 | 24.6           | 25.0              | 25.6 | 26.1 | 27.4 |
| 12H                                                               | 4H  | 19.2             | 19.8 | 20.2 | 20.8                | 22.1 | 19.2           | 19.8              | 20.2 | 20.8 | 22.1 |
|                                                                   | 6H  | 21.9             | 22.3 | 22.9 | 23.4                | 24.7 | 21.8           | 22.3              | 22.8 | 23.3 | 24.7 |
|                                                                   | 8H  | 23.4             | 23.8 | 24.4 | 24.9                | 26.2 | 23.4           | 23.8              | 24.4 | 24.8 | 26.2 |
| Variations with the observer position at spacings:                |     |                  |      |      |                     |      |                |                   |      |      |      |
| S = 1.0H                                                          |     | + 0.1 / - 0.1    |      |      |                     |      | + 0.1 / - 0.1  |                   |      |      |      |
| 1.5H                                                              |     | + 0.2 / - 0.3    |      |      |                     |      | + 0.2 / - 0.3  |                   |      |      |      |
| 2.0H                                                              |     | + 0.3 / - 0.4    |      |      |                     |      | + 0.3 / - 0.4  |                   |      |      |      |

CIE Pub.117 Corrected 7043 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.8)

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2016-05-09

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

## UTILIZATION FACTORS TABLE

|                                                                   |                     |                   |
|-------------------------------------------------------------------|---------------------|-------------------|
| Test:U:120.0V I:0.7011A P:83.91W PF:0.9967 Lamp Flux:7042.91x1 lm |                     |                   |
| NAME:                                                             | TYPE:SWL-32P-SN     | WEIGHT:           |
| SPEC.:                                                            | DIM.:               | SERIAL No.:       |
| MFR.: 大显                                                          | SUR.:0.41*0.41*3.14 | PROTECTION ANGLE: |

| REFLECTANCE                      |                                                     |     |           |     |     |     |     |               |     |        |
|----------------------------------|-----------------------------------------------------|-----|-----------|-----|-----|-----|-----|---------------|-----|--------|
| Ceiling                          | 0.8                                                 | 0.8 | 0.8       | 0.7 | 0.7 | 0.7 | 0.5 | 0.5           | 0.5 | 0      |
| Walls                            | 0.7                                                 | 0.5 | 0.3       | 0.7 | 0.5 | 0.3 | 0.7 | 0.5           | 0.3 | 0      |
| Working plane                    | 0.2                                                 | 0.2 | 0.2       | 0.2 | 0.2 | 0.2 | 0.2 | 0.2           | 0.2 | 0      |
| ROOM INDEX                       | UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$ |     |           |     |     |     |     |               |     |        |
| $k = 0.60$                       | 37                                                  | 24  | 17        | 35  | 23  | 16  | 31  | 21            | 15  | 8      |
| 0.80                             | 45                                                  | 31  | 23        | 42  | 30  | 22  | 37  | 27            | 20  | 10     |
| 1.00                             | 52                                                  | 38  | 29        | 49  | 36  | 28  | 42  | 34            | 25  | 13     |
| 1.25                             | 59                                                  | 45  | 36        | 55  | 42  | 34  | 47  | 37            | 30  | 16     |
| 1.50                             | 64                                                  | 51  | 41        | 60  | 47  | 39  | 51  | 41            | 34  | 19     |
| 2.00                             | 72                                                  | 59  | 50        | 67  | 55  | 47  | 57  | 48            | 41  | 23     |
| 2.50                             | 77                                                  | 65  | 56        | 71  | 61  | 52  | 60  | 52            | 45  | 25     |
| 3.00                             | 81                                                  | 70  | 61        | 75  | 65  | 57  | 63  | 56            | 50  | 28     |
| 4.00                             | 86                                                  | 77  | 69        | 79  | 71  | 64  | 67  | 61            | 55  | 31     |
| 5.00                             | 90                                                  | 81  | 74        | 83  | 75  | 69  | 70  | 64            | 59  | 34     |
| ROOM INDEX                       | UF(total)                                           |     |           |     |     |     |     |               |     | Direct |
| According to DIN EN 13032-2 2004 |                                                     |     | Suspended |     |     |     |     | SHRNOM = 1.25 |     |        |

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2016-05-09


γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

|                                                                   |                     |                   |
|-------------------------------------------------------------------|---------------------|-------------------|
| Test:U:120.0V I:0.7011A P:83.91W PF:0.9967 Lamp Flux:7042.91x1 lm |                     |                   |
| NAME:                                                             | TYPE:SWL-32P-SN     | WEIGHT:           |
| SPEC.:                                                            | DIM.:               | SERIAL No.:       |
| MFR.: 大显                                                          | SUR.:0.41*0.41*3.14 | PROTECTION ANGLE: |

Conical surface Flux(90deg):  
952.73 lm  
%lum = 13.5%  
%lamp = 13.5%

Conical surface Flux(120deg):  
1676.3 lm  
%lum = 23.8%  
%lamp = 23.8%

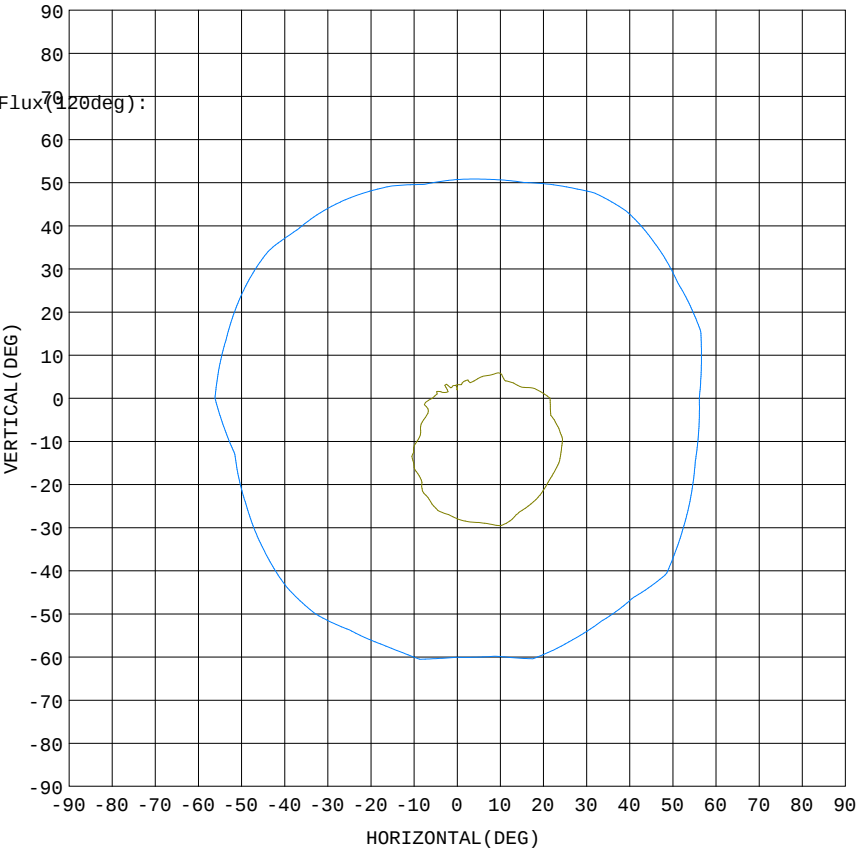

- 10% 62.60
- 20% 125.2
- 30% 187.8
- 40% 250.4
- 50% 313.0
- 60% 375.6
- 70% 438.2
- 80% 500.8
- 90% 563.4

Imax:626.0(H-70.0,V-93.0)  
(At:C=160.0,Gamma=93.0)  
UNIT: cd


C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.6DEG  
Operators:David  
Test Date:2016-05-09

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.287  
Humidity:67.1%  
Test Distance:26.000m [K=1.0000]  
Remarks:

## AAI Figure

|                                                                   |                     |                   |
|-------------------------------------------------------------------|---------------------|-------------------|
| Test:U:120.0V I:0.7011A P:83.91W PF:0.9967 Lamp Flux:7042.91x1 lm |                     |                   |
| NAME:                                                             | TYPE:SWL-32P-SN     | WEIGHT:           |
| SPEC.:                                                            | DIM.:               | SERIAL No.:       |
| MFR.: 大显                                                          | SUR.:0.41*0.41*3.14 | PROTECTION ANGLE: |

Flux out:952.7 lm

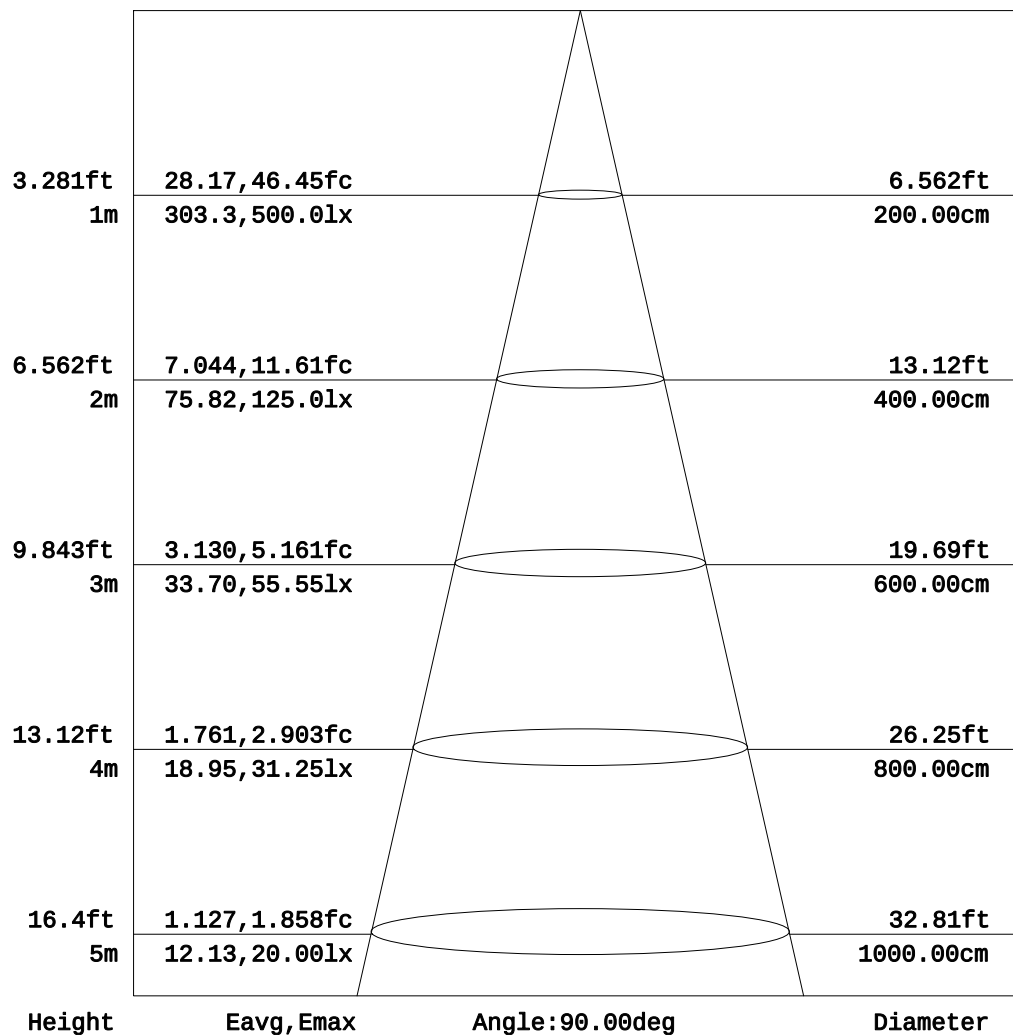


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.6DEG  
Operators:David  
Test Date:2016-05-09

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.287  
Humidity:67.1%  
Test Distance:26.000m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM


|                                                                   |                     |                   |
|-------------------------------------------------------------------|---------------------|-------------------|
| Test:U:120.0V I:0.7011A P:83.91W PF:0.9967 Lamp Flux:7042.91x1 lm |                     |                   |
| NAME:                                                             | TYPE:SWL-32P-SN     | WEIGHT:           |
| SPEC.:                                                            | DIM.:               | SERIAL No.:       |
| MFR.: 大显                                                          | SUR.:0.41*0.41*3.14 | PROTECTION ANGLE: |

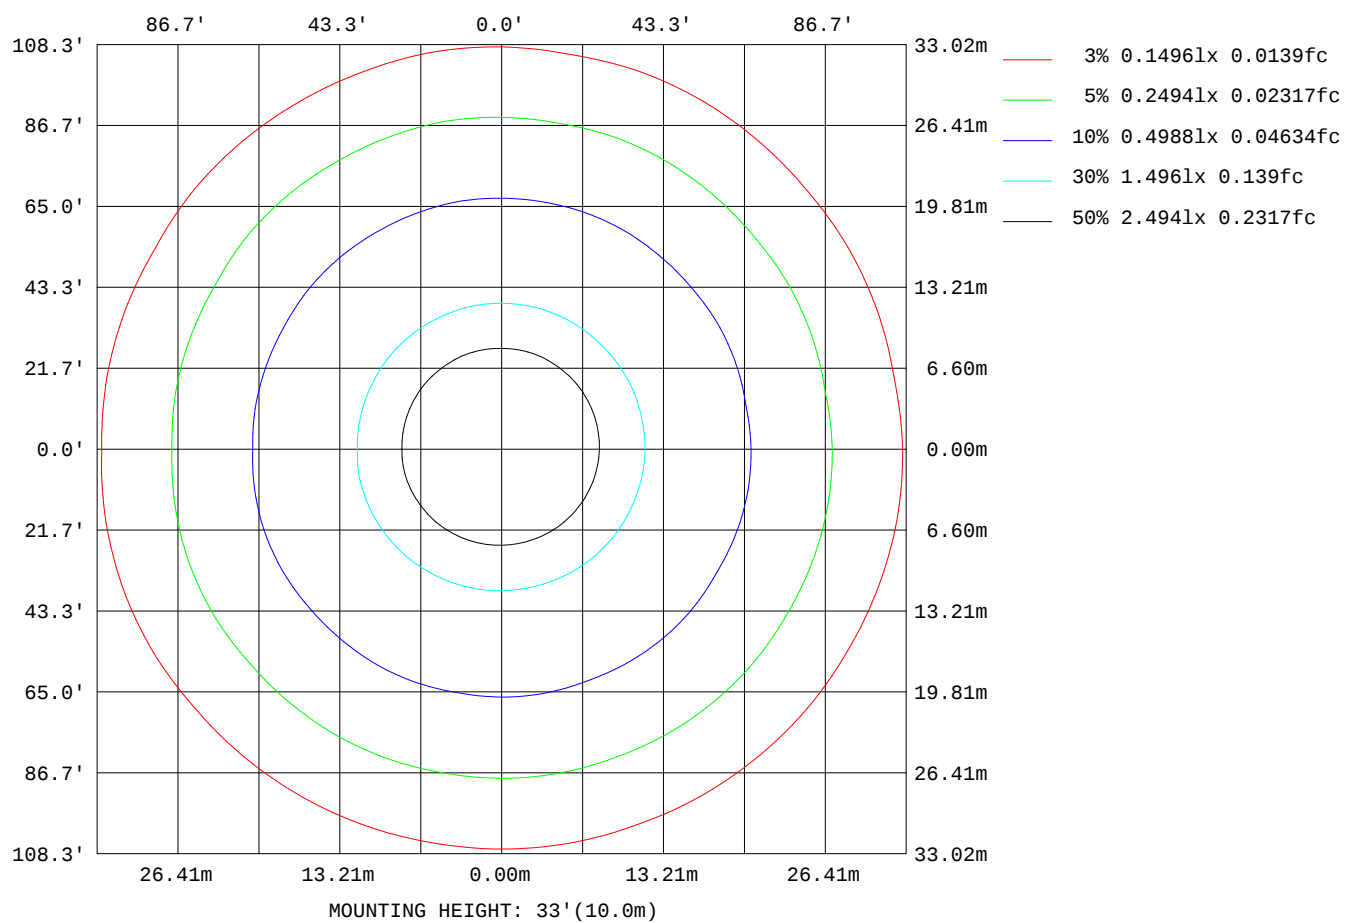

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.6DEG  
 Operators: David  
 Test Date: 2016-05-09

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE G0-R5000\_V2 SYSTEM V2.0.287  
 Humidity: 67.1%  
 Test Distance: 26.000m [K=1.0000]  
 Remarks:

## Planar Illuminance Curve

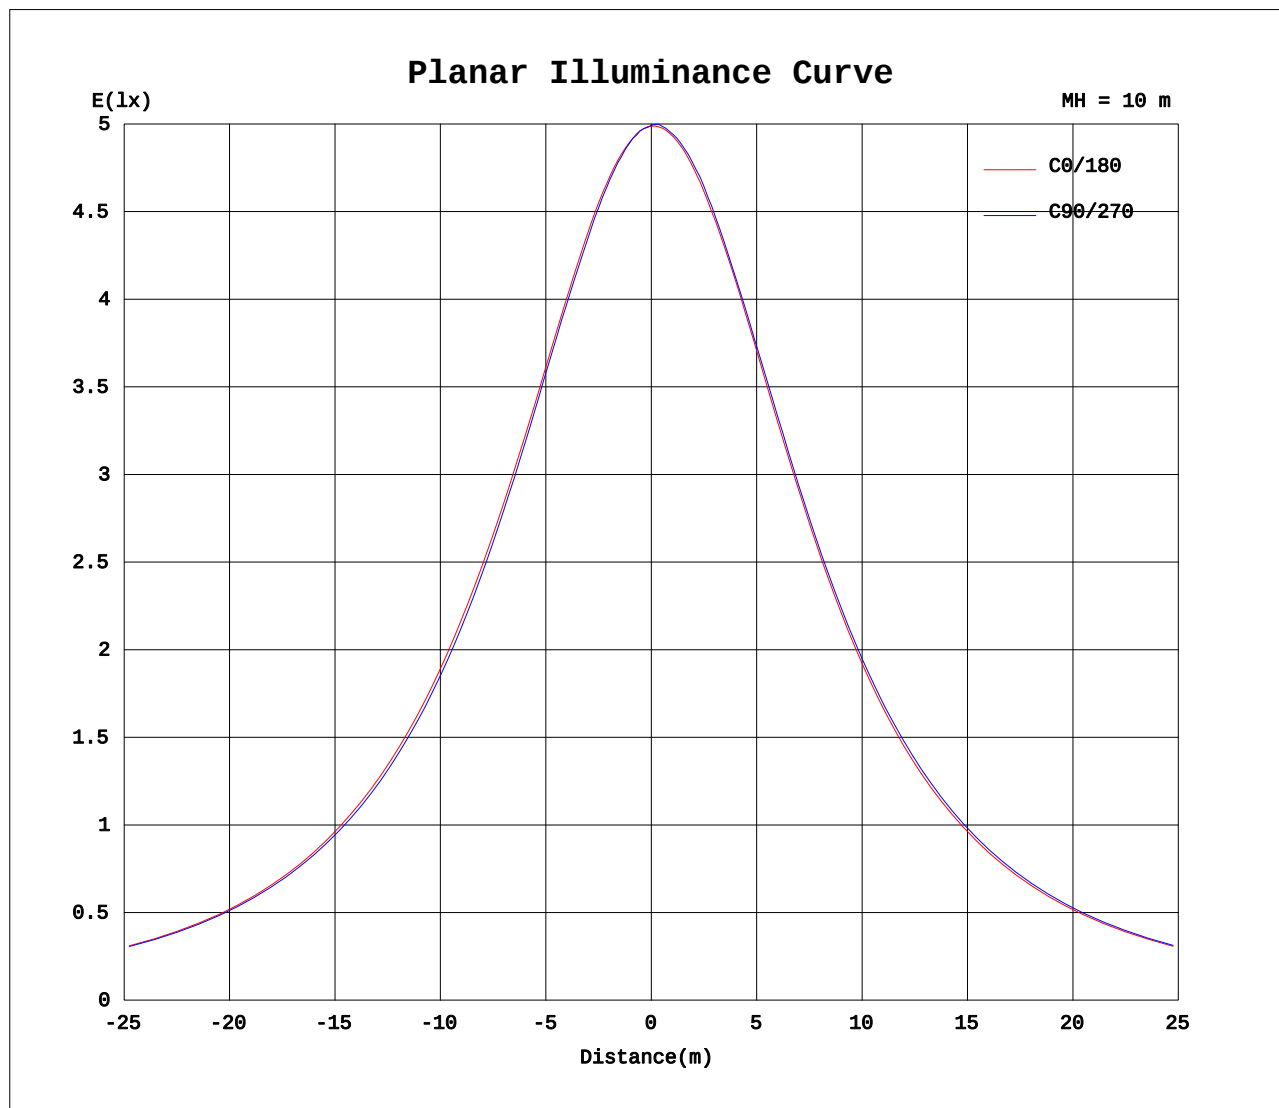

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 25.6DEG  
Operators: David  
Test Date: 2016-05-09

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE G0-R5000\_V2 SYSTEM V2.0.287  
Humidity: 67.1%  
Test Distance: 26.000m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

|                                                                   |  |  |  |  |  |  |  |  |                     |  |  |  |  |                   |  |  |  |  |
|-------------------------------------------------------------------|--|--|--|--|--|--|--|--|---------------------|--|--|--|--|-------------------|--|--|--|--|
| Test:U:120.0V I:0.7011A P:83.91W PF:0.9967 Lamp Flux:7042.91x1 lm |  |  |  |  |  |  |  |  |                     |  |  |  |  |                   |  |  |  |  |
| NAME:                                                             |  |  |  |  |  |  |  |  | TYPE:SWL-32P-SN     |  |  |  |  | WEIGHT:           |  |  |  |  |
| SPEC.:                                                            |  |  |  |  |  |  |  |  | DIM.:               |  |  |  |  | SERIAL No.:       |  |  |  |  |
| MFR.: 大显                                                          |  |  |  |  |  |  |  |  | SUR.:0.41*0.41*3.14 |  |  |  |  | PROTECTION ANGLE: |  |  |  |  |

Table--1

UNIT: cd

| $\gamma$ (DEG) \ C (DEG) | 0   | 10  | 20  | 30  | 40  | 50  | 60  | 70  | 80  | 90  | 100 | 110 | 120 | 130 | 140 | 150 | 160 | 170 | 180 |
|--------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 0                        | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 |
| 5                        | 497 | 497 | 497 | 496 | 497 | 496 | 497 | 497 | 497 | 497 | 497 | 499 | 498 | 499 | 500 | 500 | 500 | 500 | 500 |
| 10                       | 498 | 497 | 496 | 496 | 495 | 494 | 496 | 495 | 496 | 496 | 497 | 498 | 498 | 500 | 500 | 501 | 502 | 503 | 503 |
| 15                       | 499 | 498 | 495 | 495 | 496 | 494 | 495 | 495 | 495 | 496 | 497 | 498 | 499 | 500 | 502 | 504 | 505 | 506 | 506 |
| 20                       | 500 | 500 | 497 | 497 | 496 | 495 | 495 | 495 | 496 | 496 | 498 | 500 | 501 | 502 | 504 | 507 | 508 | 510 | 511 |
| 25                       | 503 | 502 | 500 | 498 | 498 | 498 | 497 | 497 | 498 | 499 | 499 | 503 | 504 | 506 | 509 | 512 | 514 | 515 | 516 |
| 30                       | 509 | 508 | 505 | 503 | 502 | 501 | 501 | 500 | 502 | 502 | 504 | 506 | 510 | 511 | 514 | 517 | 520 | 521 | 522 |
| 35                       | 516 | 514 | 511 | 509 | 508 | 506 | 506 | 505 | 506 | 508 | 509 | 512 | 515 | 518 | 520 | 524 | 527 | 528 | 529 |
| 40                       | 525 | 521 | 519 | 517 | 516 | 514 | 514 | 512 | 513 | 515 | 517 | 519 | 523 | 527 | 529 | 532 | 535 | 537 | 536 |
| 45                       | 535 | 532 | 529 | 527 | 526 | 524 | 524 | 521 | 523 | 524 | 526 | 528 | 532 | 536 | 538 | 541 | 545 | 547 | 543 |
| 50                       | 547 | 545 | 541 | 539 | 538 | 537 | 535 | 534 | 534 | 536 | 537 | 540 | 543 | 547 | 549 | 552 | 555 | 557 | 551 |
| 55                       | 561 | 559 | 555 | 551 | 553 | 552 | 548 | 545 | 548 | 549 | 550 | 553 | 557 | 558 | 561 | 565 | 568 | 569 | 561 |
| 60                       | 573 | 573 | 570 | 564 | 568 | 567 | 563 | 558 | 563 | 563 | 561 | 567 | 570 | 570 | 572 | 578 | 581 | 579 | 571 |
| 65                       | 585 | 586 | 583 | 577 | 581 | 580 | 577 | 572 | 576 | 577 | 574 | 579 | 582 | 582 | 583 | 591 | 593 | 589 | 581 |
| 70                       | 595 | 597 | 594 | 590 | 593 | 591 | 589 | 585 | 588 | 588 | 587 | 591 | 594 | 594 | 595 | 603 | 604 | 599 | 590 |
| 75                       | 602 | 604 | 604 | 601 | 602 | 600 | 600 | 597 | 599 | 599 | 598 | 600 | 603 | 605 | 605 | 612 | 613 | 608 | 597 |
| 80                       | 608 | 610 | 610 | 609 | 608 | 607 | 608 | 606 | 607 | 607 | 607 | 608 | 610 | 612 | 615 | 619 | 620 | 617 | 602 |
| 85                       | 612 | 612 | 613 | 614 | 612 | 612 | 613 | 612 | 613 | 613 | 613 | 613 | 615 | 618 | 621 | 623 | 624 | 622 | 606 |
| 90                       | 613 | 613 | 614 | 615 | 614 | 613 | 615 | 615 | 616 | 616 | 616 | 615 | 617 | 621 | 623 | 625 | 626 | 624 | 607 |
| 95                       | 610 | 610 | 612 | 612 | 612 | 613 | 615 | 615 | 616 | 618 | 617 | 615 | 617 | 621 | 624 | 624 | 625 | 624 | 606 |
| 100                      | 603 | 605 | 608 | 606 | 608 | 610 | 612 | 610 | 613 | 617 | 614 | 612 | 615 | 619 | 620 | 620 | 622 | 621 | 601 |
| 105                      | 593 | 597 | 602 | 599 | 599 | 605 | 607 | 602 | 607 | 612 | 611 | 606 | 610 | 614 | 613 | 613 | 617 | 615 | 594 |
| 110                      | 582 | 587 | 592 | 590 | 590 | 596 | 599 | 592 | 599 | 604 | 603 | 599 | 603 | 606 | 603 | 604 | 609 | 608 | 584 |
| 115                      | 571 | 575 | 579 | 578 | 579 | 584 | 588 | 584 | 588 | 593 | 594 | 591 | 594 | 597 | 591 | 593 | 598 | 598 | 573 |
| 120                      | 560 | 562 | 564 | 566 | 567 | 571 | 575 | 574 | 577 | 581 | 582 | 582 | 584 | 585 | 580 | 580 | 585 | 585 | 563 |
| 125                      | 547 | 548 | 550 | 553 | 555 | 558 | 561 | 562 | 565 | 568 | 571 | 571 | 571 | 572 | 569 | 568 | 571 | 571 | 552 |
| 130                      | 534 | 535 | 538 | 540 | 543 | 546 | 549 | 551 | 552 | 556 | 558 | 558 | 559 | 559 | 557 | 557 | 558 | 558 | 539 |
| 135                      | 521 | 523 | 527 | 529 | 531 | 534 | 539 | 539 | 542 | 544 | 546 | 547 | 547 | 548 | 547 | 545 | 546 | 545 | 527 |
| 140                      | 511 | 513 | 516 | 519 | 520 | 523 | 528 | 529 | 531 | 533 | 536 | 537 | 535 | 537 | 536 | 535 | 534 | 533 | 516 |
| 145                      | 502 | 504 | 509 | 510 | 511 | 515 | 519 | 521 | 522 | 523 | 526 | 526 | 525 | 527 | 527 | 525 | 523 | 524 | 507 |
| 150                      | 495 | 497 | 502 | 501 | 502 | 508 | 511 | 511 | 513 | 514 | 517 | 516 | 516 | 518 | 517 | 516 | 515 | 515 | 500 |
| 155                      | 483 | 490 | 494 | 491 | 494 | 501 | 502 | 501 | 503 | 506 | 507 | 505 | 507 | 510 | 509 | 506 | 507 | 507 | 490 |
| 160                      | 459 | 457 | 463 | 465 | 469 | 472 | 477 | 477 | 477 | 475 | 480 | 481 | 486 | 486 | 488 | 485 | 486 | 482 | 466 |
| 165                      | 428 | 426 | 425 | 428 | 439 | 435 | 439 | 448 | 447 | 445 | 448 | 455 | 455 | 456 | 460 | 459 | 454 | 452 | 440 |
| 170                      | 443 | 430 | 413 | 438 | 438 | 418 | 443 | 453 | 438 | 446 | 454 | 460 | 455 | 441 | 463 | 461 | 443 | 459 | 456 |
| 175                      | 449 | 447 | 455 | 451 | 445 | 464 | 467 | 455 | 456 | 467 | 457 | 455 | 466 | 466 | 462 | 458 | 460 | 460 | 440 |
| 180                      | 459 | 455 | 451 | 456 | 469 | 461 | 455 | 462 | 465 | 463 | 460 | 463 | 461 | 457 | 465 | 462 | 460 | 457 | 458 |

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2016-05-09

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 $\gamma$  Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

|                                                                   |  |  |  |  |  |  |  |  |                     |  |  |  |  |  |                   |  |  |
|-------------------------------------------------------------------|--|--|--|--|--|--|--|--|---------------------|--|--|--|--|--|-------------------|--|--|
| Test:U:120.0V I:0.7011A P:83.91W PF:0.9967 Lamp Flux:7042.91x1 lm |  |  |  |  |  |  |  |  |                     |  |  |  |  |  |                   |  |  |
| NAME:                                                             |  |  |  |  |  |  |  |  | TYPE:SWL-32P-SN     |  |  |  |  |  | WEIGHT:           |  |  |
| SPEC.:                                                            |  |  |  |  |  |  |  |  | DIM.:               |  |  |  |  |  | SERIAL No.:       |  |  |
| MFR.: 大显                                                          |  |  |  |  |  |  |  |  | SUR.:0.41*0.41*3.14 |  |  |  |  |  | PROTECTION ANGLE: |  |  |

Table--2


UNIT: cd

| γ (DEG) | C (DEG) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |  |
|---------|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|
|         | 190     | 200 | 210 | 220 | 230 | 240 | 250 | 260 | 270 | 280 | 290 | 300 | 310 | 320 | 330 | 340 | 350 |  |
| 0       | 499     | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 | 499 |  |
| 5       | 501     | 501 | 503 | 502 | 501 | 503 | 502 | 502 | 501 | 502 | 501 | 501 | 501 | 500 | 499 | 499 | 498 |  |
| 10      | 504     | 505 | 506 | 505 | 505 | 507 | 505 | 506 | 505 | 505 | 503 | 503 | 504 | 502 | 500 | 501 | 499 |  |
| 15      | 507     | 509 | 509 | 510 | 510 | 511 | 510 | 510 | 509 | 508 | 508 | 507 | 507 | 504 | 503 | 502 | 501 |  |
| 20      | 512     | 513 | 514 | 515 | 514 | 516 | 515 | 515 | 513 | 514 | 513 | 511 | 510 | 509 | 506 | 504 | 503 |  |
| 25      | 517     | 519 | 521 | 521 | 520 | 522 | 522 | 520 | 520 | 520 | 519 | 516 | 515 | 513 | 511 | 508 | 507 |  |
| 30      | 524     | 525 | 527 | 527 | 527 | 529 | 529 | 528 | 527 | 526 | 525 | 523 | 521 | 520 | 516 | 514 | 512 |  |
| 35      | 531     | 532 | 534 | 535 | 534 | 536 | 536 | 535 | 534 | 535 | 533 | 530 | 528 | 526 | 523 | 521 | 518 |  |
| 40      | 538     | 539 | 541 | 543 | 542 | 544 | 545 | 544 | 542 | 542 | 541 | 537 | 535 | 533 | 531 | 528 | 526 |  |
| 45      | 546     | 547 | 549 | 552 | 551 | 552 | 553 | 554 | 551 | 551 | 550 | 546 | 543 | 542 | 540 | 538 | 536 |  |
| 50      | 555     | 556 | 558 | 560 | 560 | 561 | 562 | 563 | 562 | 561 | 560 | 557 | 553 | 551 | 550 | 550 | 547 |  |
| 55      | 564     | 565 | 567 | 570 | 571 | 571 | 571 | 573 | 572 | 572 | 570 | 567 | 563 | 562 | 562 | 561 | 558 |  |
| 60      | 575     | 575 | 577 | 580 | 581 | 580 | 581 | 583 | 583 | 581 | 581 | 578 | 574 | 573 | 575 | 573 | 568 |  |
| 65      | 587     | 585 | 585 | 591 | 592 | 589 | 591 | 595 | 592 | 589 | 592 | 590 | 585 | 582 | 587 | 584 | 577 |  |
| 70      | 596     | 595 | 592 | 601 | 601 | 598 | 600 | 604 | 600 | 595 | 600 | 599 | 595 | 591 | 595 | 593 | 586 |  |
| 75      | 603     | 603 | 601 | 608 | 608 | 607 | 605 | 609 | 605 | 600 | 605 | 606 | 603 | 599 | 601 | 599 | 594 |  |
| 80      | 608     | 608 | 608 | 612 | 612 | 613 | 610 | 612 | 609 | 605 | 607 | 609 | 608 | 605 | 604 | 603 | 600 |  |
| 85      | 609     | 611 | 613 | 613 | 614 | 615 | 612 | 611 | 609 | 607 | 607 | 609 | 609 | 608 | 605 | 604 | 602 |  |
| 90      | 609     | 611 | 614 | 613 | 614 | 614 | 612 | 609 | 606 | 606 | 605 | 606 | 607 | 607 | 603 | 603 | 601 |  |
| 95      | 606     | 609 | 612 | 610 | 610 | 610 | 608 | 604 | 601 | 601 | 601 | 601 | 602 | 602 | 600 | 600 | 598 |  |
| 100     | 602     | 604 | 606 | 605 | 604 | 604 | 601 | 597 | 593 | 593 | 593 | 593 | 595 | 593 | 593 | 594 | 593 |  |
| 105     | 596     | 597 | 598 | 596 | 595 | 595 | 591 | 587 | 584 | 583 | 583 | 583 | 585 | 582 | 583 | 585 | 585 |  |
| 110     | 587     | 589 | 587 | 584 | 585 | 584 | 578 | 575 | 573 | 570 | 570 | 571 | 573 | 569 | 570 | 574 | 574 |  |
| 115     | 577     | 579 | 575 | 571 | 572 | 572 | 565 | 561 | 561 | 558 | 554 | 557 | 560 | 555 | 556 | 561 | 561 |  |
| 120     | 565     | 566 | 562 | 556 | 558 | 557 | 550 | 546 | 546 | 542 | 539 | 542 | 544 | 541 | 542 | 545 | 546 |  |
| 125     | 552     | 552 | 547 | 544 | 543 | 542 | 535 | 532 | 531 | 527 | 525 | 526 | 528 | 527 | 527 | 530 | 531 |  |
| 130     | 539     | 538 | 534 | 530 | 528 | 526 | 521 | 518 | 516 | 514 | 512 | 512 | 514 | 514 | 514 | 517 | 518 |  |
| 135     | 526     | 524 | 521 | 519 | 515 | 513 | 509 | 506 | 504 | 503 | 501 | 499 | 502 | 503 | 502 | 504 | 508 |  |
| 140     | 515     | 512 | 511 | 507 | 503 | 502 | 499 | 495 | 494 | 493 | 492 | 489 | 493 | 493 | 493 | 495 | 499 |  |
| 145     | 505     | 503 | 501 | 499 | 494 | 493 | 491 | 487 | 486 | 487 | 485 | 483 | 487 | 486 | 486 | 488 | 492 |  |
| 150     | 497     | 494 | 494 | 491 | 486 | 487 | 484 | 481 | 480 | 482 | 479 | 477 | 482 | 482 | 479 | 483 | 486 |  |
| 155     | 487     | 487 | 487 | 482 | 477 | 480 | 476 | 471 | 475 | 475 | 470 | 472 | 474 | 473 | 469 | 477 | 477 |  |
| 160     | 467     | 468 | 463 | 459 | 459 | 458 | 449 | 451 | 453 | 444 | 442 | 449 | 443 | 436 | 445 | 450 | 440 |  |
| 165     | 436     | 435 | 437 | 434 | 429 | 427 | 425 | 422 | 421 | 417 | 413 | 412 | 413 | 411 | 409 | 410 | 413 |  |
| 170     | 459     | 461 | 445 | 442 | 451 | 456 | 440 | 437 | 448 | 443 | 429 | 435 | 437 | 424 | 429 | 441 | 421 |  |
| 175     | 440     | 451 | 467 | 463 | 449 | 450 | 461 | 458 | 450 | 453 | 460 | 453 | 448 | 457 | 453 | 445 | 458 |  |
| 180     | 458     | 454 | 451 | 460 | 468 | 462 | 457 | 462 | 465 | 463 | 460 | 462 | 462 | 460 | 464 | 463 | 459 |  |

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.6DEG  
 Operators:David  
 Test Date:2016-05-09


γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.287  
 Humidity:67.1%  
 Test Distance:26.000m [K=1.0000]  
 Remarks:

**I(cd)**

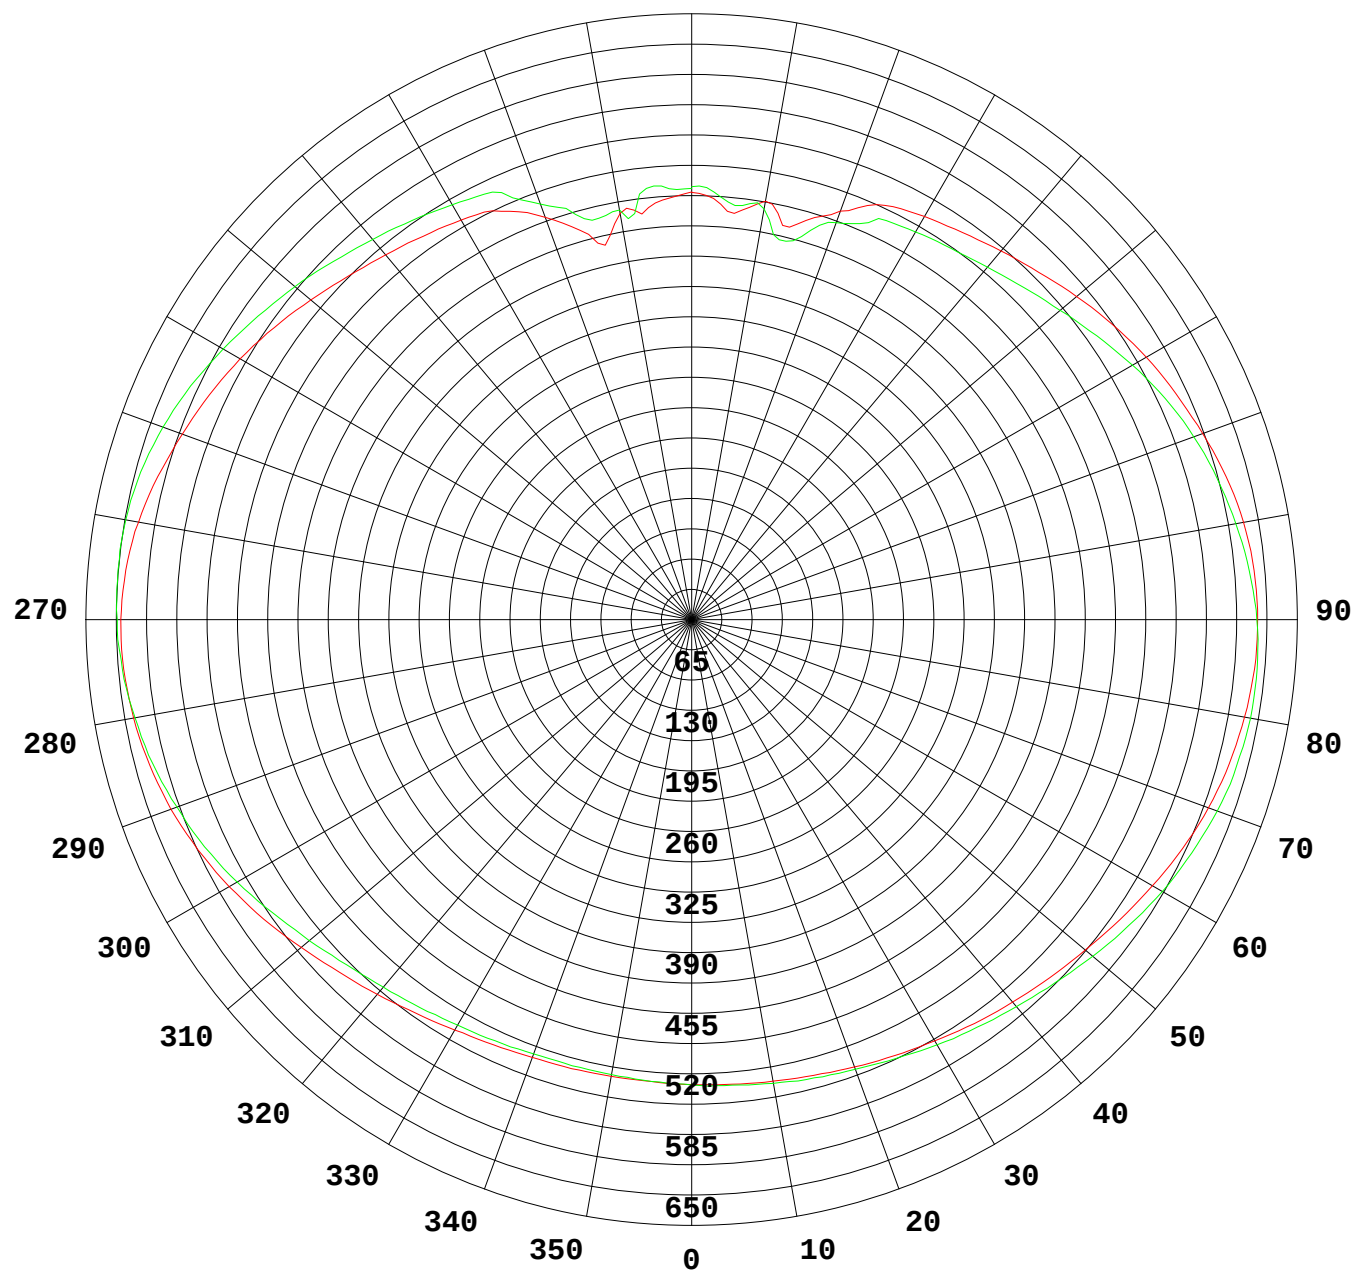

1000 lm

K = 1

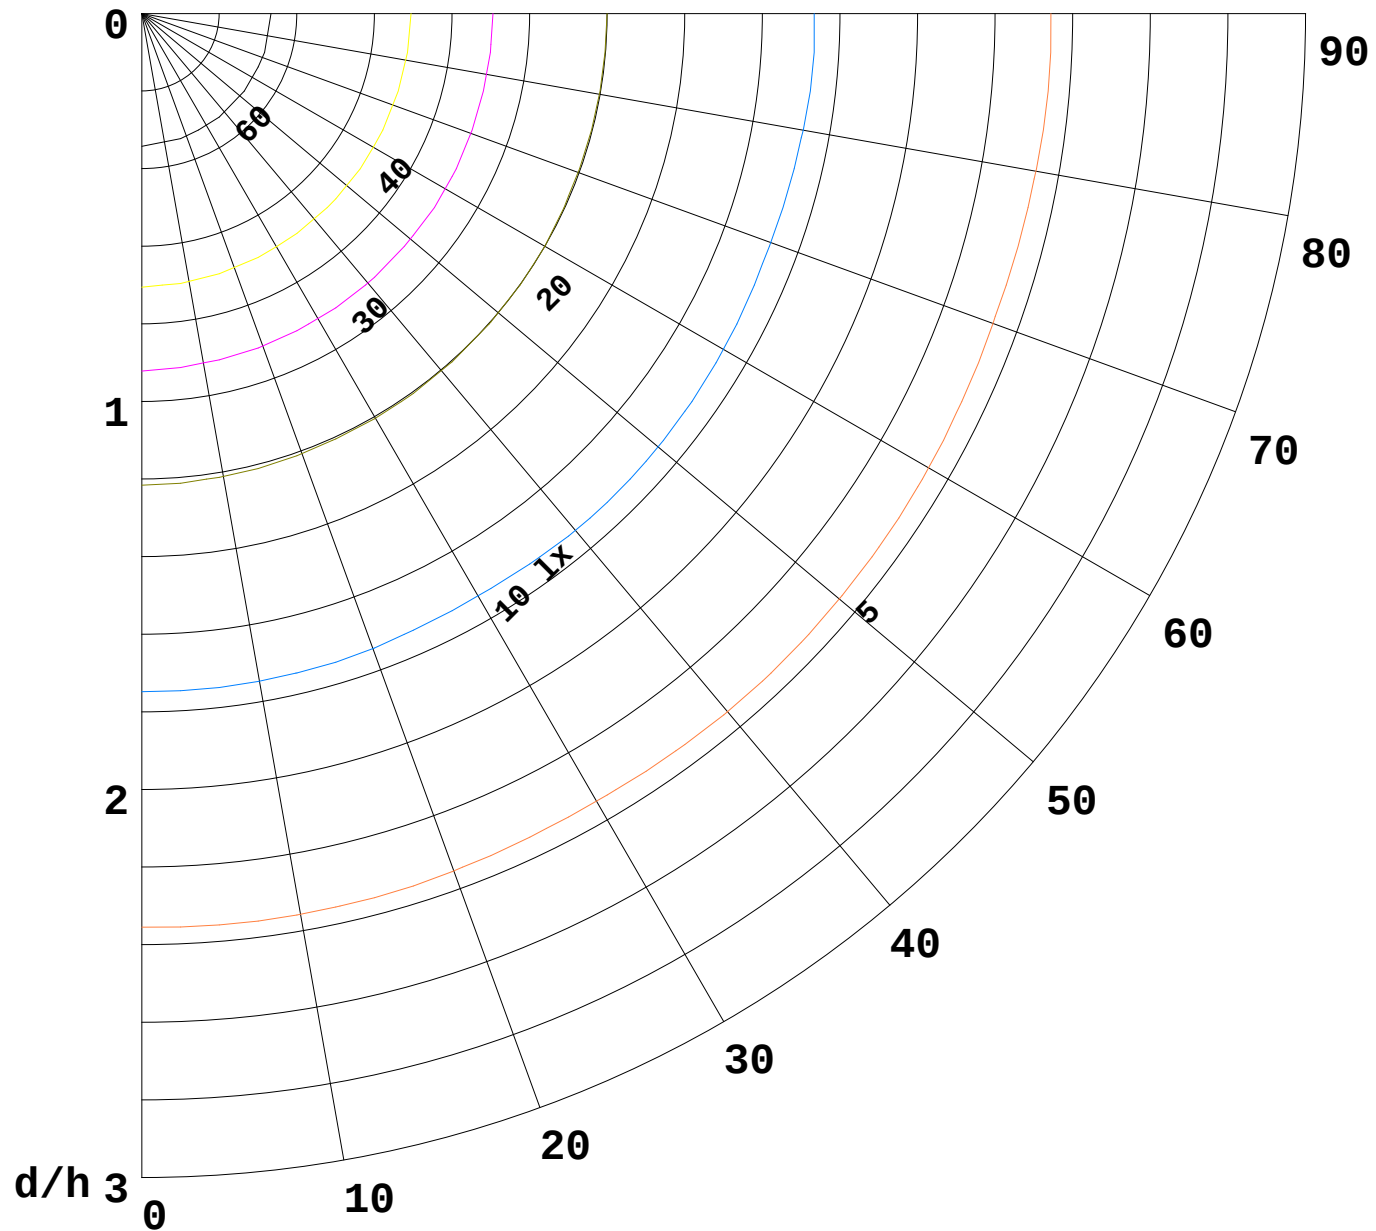

F = 3000 lm  
 K = 0.7  
 Hcc = 2.0 m  
 Hfc = 0.0 m  
 Eave = 300 lx

|       |     |    |     |
|-------|-----|----|-----|
|       | Pcc | Pw | Pfc |
| ————— | 70  | 50 | 30  |
| ————— | 50  | 30 | 20  |

