

**CAUTION**

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

GENERAL

Read all instructions carefully for safe operation and installation. All electrical connections must be in accordance with local and national electrical code (N.E.C.) standards. Remove the fixture and mounting package from box. Make sure no parts are missing by referencing these Installation Instructions. Please contact Blackjack Lighting at 847-941-0588 if any parts are missing or damaged. This product is suitable for DAMP locations.

PREPARATION

1. Carefully remove the fixture from its box.
2. Remove the acrylic lens / fixture pan assembly (11/13) from the back panel (10) by loosening the two set screws (12).

MOUNTING

3. Pull the supply wires (2&4) and the house ground wire (6) out of the outlet box (1). Thread them through the large center hole in the back panel (10).
4. Place the back panel (10) over the outlet box (1). Insert the two mounting screws (9) through the slots in the back panel (10), then tightly secure the mounting screws (9) into the holes in the outlet box (1).

ELECTRICAL CONNECTIONS

5. Using the wire connectors (8), connect the white supply wire (2) to the white fixture wire (3); connect the black supply wire (4) to the black fixture wire (5); and connect the house ground wire (6) to the fixture ground wire (7). Tuck the wires back into the outlet box (1).

FINAL ASSEMBLY

6. To secure the acrylic lens / fixture pan assembly (11/13) to the back panel (10), align the holes in the sides of the fixture pan (11) with the holes on the sides of the back panel (10). Then insert the and tighten the two set screws (12).

DIMMING

- Fixture Dimming Type: TRIAC Phase control dimmer.
- For recommended dimmers see: blackjacklighting.com

HARDWARE




Wire Connector (#8)
(3 included)



Back Plate
Mounting Screw (#9)
(2 included)



Side Screw (#12)
(2 included)

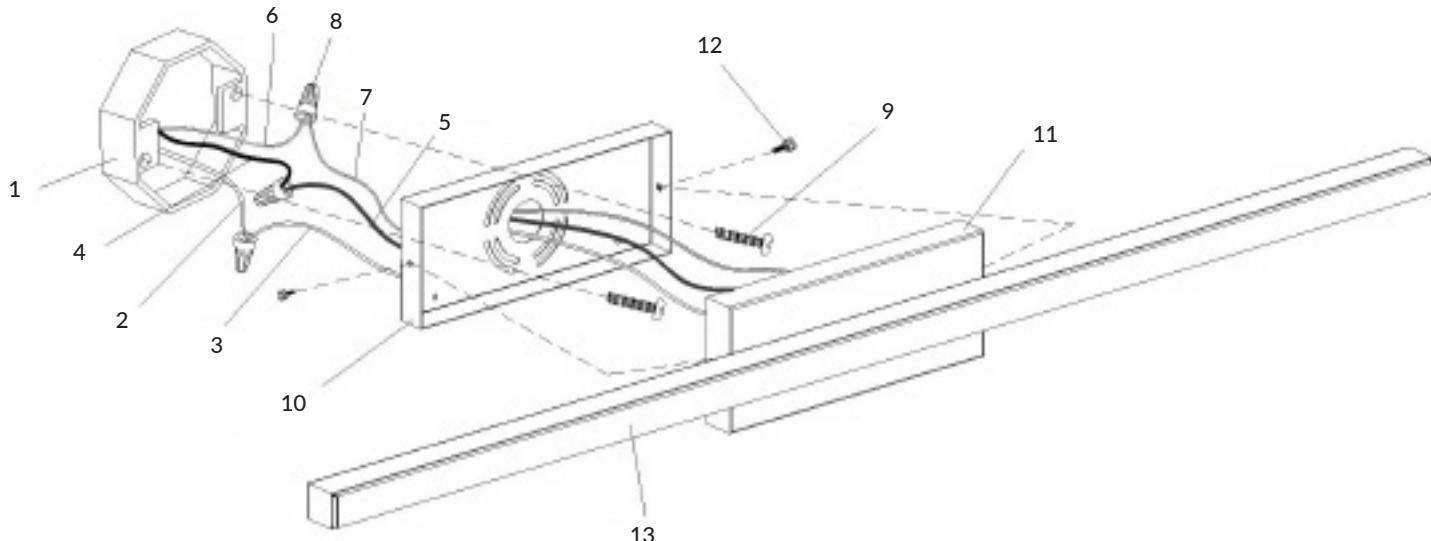

1. OUTLET BOX (BY OTHERS)	8. WIRE CONNECTORS
2. WHITE SUPPLY WIRE	9. MOUNTING SCREWS
3. WHITE FIXTURE WIRE	10. BACK PANEL
4. BLACK SUPPLY WIRE	11. FIXTURE PAN
5. BLACK FIXTURE WIRE	12. SET SCREWS
6. HOUSE GROUND WIRE	13. ACRYLIC LENS
7. FIXTURE GROUND WIRE	